Kerala Home, Phase 1

Pre-construction drawing set, Guntur, Andhra Pradesh (agricultural land: conversion to be confirmed)

Sheet index

A-000	Cover and sheet index	-
A-001	Design basis and general notes	-
A-002	Construction phasing (roof first, three stages)	1:100
A-101	Site plan: the whole plot	1:200
A-102	Ground floor plan	1:75
A-103	First floor plan	1:75
A-104	Furniture layout, ground floor	1:75
A-105	Furniture layout, first floor	1:75
A-106	Working plan, ground floor: clear sizes and sections	1:75
A-107	Working plan, first floor: clear sizes	1:75
A-108	Floor finishes and levels, ground floor	1:75
A-109	Floor finishes and levels, first floor	1:75
A-110	Roof plan	1:75
A-201	North and south elevations	1:100
A-202	East and west elevations	1:100
A-301	Sections A-A and B-B	1:100
A-401	Door details and ground-floor windows	1:75
A-402	Window details, first floor	1:75
A-501	Typical details 1: plinth, floor, window, eaves	NTS
A-502	Typical details 2: bath, kitchen, basin, AAC	NTS
A-601	Schedules	-
E-101	Lighting, fans and ceilings, ground floor	1:75
E-102	Lighting, fans and ceilings, first floor	1:75
E-103	Power, AC and data, ground floor	1:75
E-104	Power, AC and data, first floor	1:75
P-101	Water supply and drainage	1:100

Project data

Site	Guntur, Andhra Pradesh; agricultural land (conversion to confirm)
Plot	170' deep (west to the east road), 27' wide at the back, 30' half-way, 40' at the road: about 5,398 sq ft, 8 kept behind the house, 109 of front land (forecourt, car porch, drive, vegetable garden, carpentry workshop)
Built footprint	53' x 22' = 1,166 sq ft ground floor; about 615 sq ft enclosed + 420 sq ft covered terrace on the first floor
Carpet area	1,973 sq ft clear, both floors, incl. poomukham and terrace
Construction	Two-storey RCC frame, AAC walls, first-floor slab over the back half, steel-truss roofs with clay tiles
Plinth	FFL +2'-0" above finished ground

Key design decisions

• TV bay with a floating console (3 Nov 2026, owner: the TV is the most important thing in the living): the storage wall goes; the west side of the living becomes a 7 ft wide, 2'-6" deep TV bay on the powder room and guest bath line (y 18 to 25), its back wall lined in teak slats with a concealed LED wash, a 5 ft wall-hung console at 1'-3" and a 65 in TV centred on the sofa about 10'-9" away; the slim lamp niche stays at the end of the entry axis. The 2 ft of wall that ran past the powder room into the hall goes, so the hall opens to the living for 5'-8" (y 12.33 to 18).

• Open hall (3 Nov 2026, owner): the lobby in front of the bedrooms and its wing door go; the lobby and the stair hall become one open hall, 14 ft from the den and master doors to the stair foot, with the powder room door off it. The master and the den keep their own doors.

• Shorter powder room, no lobby cupboard (3 Nov 2026, owner): the powder room is cut to 5 x 7 ft with its south wall on the guest bath's line (y 18), so the two rooms read as one row; the freed 5 x 2 ft joins the stair hall in front of the powder door. The coat, shoe and linen cupboard in the lobby goes, so the lobby is an open 6'-6" square.

• Teak storage wall instead of the walk-in store (3 Nov 2026, owner): a 3'-9" wide store with a 2 ft aisle was hard to use. The powder room widens to 5 x 9 ft (about 4'-6" clear); the rest of the strip becomes a 9 ft teak storage wall 2 ft deep opening straight into the living: full-height cupboards in the south bay with the lamp niche set into their face on the entry axis, and a 4'-8" TV alcove in the north bay with drawers below, cupboards above and the media wiring behind a lift-off panel. The lobby, the den's own bath and the bedroom-wing door stay. Grain bins go in the low store under the half landing.

• Stair to the south (3 Nov 2026, owner, for vastu: the stair is preferred in the south, west or south-west): the stair moves from the north side of the middle band to the middle of the south side (x 34.5-42 x 3-12.33), still rising clockwise, up the east flight going south to a half landing on the south wall and up the west flight going north. The stair hall in front of it (y 12.33-16) stays open to the living and keeps the bedroom-wing door. The powder room (3'-9" x 9 ft) and the store (3'-9" x 9 ft, sliding door, 2 ft aisle) move north of the hall. The master bath narrows to 6'-6" x 8'-6" (no dry zone or tall cupboard). Upstairs, Bedroom 2's bath moves over the master bath (every fitting stacked), the wardrobe alcove goes (an 8 ft wardrobe on the bedroom's north wall and a dresser on its east wall instead), the landing and toilet lobby become one landing west of the stair head, and the old stair well becomes a box room facing north. The stair jali now looks into the dining; the living's west wall is solid (TV, lamp niche). The stair-chimney clerestory is on the south wall under the main eave; section B now cuts the stair at y 9.5. The master bedroom, den, kitchen, living and terrace are unchanged.

• Vastu: the way for cars on the right (north) as you face the house from the road (3 Nov 2026). The gate moves to the north-east of the road front and a 10 ft drive hugs the slanted north boundary to a car porch beside the forecourt (x 91-109); a stone path under the neem joins it to the forecourt. The shops move to the road front south of the gate (the south-east), the workshop and the shared toilet to the south side with the workshop verandah facing the drive, the vegetable beds to the sunny south side with a fruit-tree row along the drive, the soak pit to the south side, and the sump, borewell and recharge pit beside the drive in the north-east. The septic tank stays in the plot's north-west quadrant.

• No separate wall round the shops (3 Nov 2026): the shops make the road frontage north of the gate, with a short wall north of them; their rear doors open to the yard they share with the workshop. One toilet cabin, shared by the workshop and the shops, stands in that yard (x 153-157.5) with its door to the drive, draining by a sealed pipe to the main septic tank. The back passage and the dividing wall are gone.

• Workshop and shops on a tight budget and demountable (3 Nov 2026): a bolted galvanised steel frame on anchor-bolt pad footings, precast RCC post-and-panel walls (the same system as the compound wall, so panels lift out and can be reused or moved), insulated metal-sandwich roofs on steel purlins, PCC or paver floors, rolling shutters bolted to the frame, and a ready-made toilet cabin shared by the workshop and the shops. No brick, plaster or RCC slab, so nothing is wasted if they move or come down.

• Rental shops drawn (3 Nov 2026): two shops of 12 x 14'-6" on the road front north of the gate, facing the road directly under a canopy, with rolling shutters, signboards and a tiled roof; a 4 ft back passage with a shared toilet. The house land's wall now runs behind them (gate post west to x 156, then north to the boundary) instead of along the road. The sump, borewell and recharge pit shift west behind the shops; six fruit trees on the north boundary and a neem shading the forecourt and car porch.

• Road frontage reserved for two small rental shops (3 Nov 2026): x 158-176 north of the gate, two shops of about 12 x 16 ft facing the east road, built later. To make room the workshop moves west to x 136-152 (about 70 ft from the house), the compost to 130-133, the sump, borewell and recharge pit to the north side behind the shops, and the vegetable garden to five beds (x 100-128).

• The whole plot planned (3 Nov 2026): 170 ft deep from the back boundary to the east road, 27 ft wide at the back, 30 ft half-way and 40 ft at the road (south side straight, north side slanting). 8 ft kept behind the house as a back garden. The 109 ft of front land: a stone forecourt with the tulsi thara; a car porch under a creeper pergola at the end of a 10 ft drive along the south boundary; the septic tank and soak pit in the plot's north-west quadrant beside the forecourt; a vegetable garden of eight raised beds with fruit trees on the north; compost pits; a 16 x

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 170' deep, 27' to 40' wide, road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Cover and sheet index**
Sheet	**A-000**
Scale	-
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Site conditions (Guntur)

• **Heat:** summer days 40-45 C (March-June). Insulated roof, ventilated attic, shaded west and south walls, AC provisions.

• **Rain:** about 850-1000 mm a year, mostly June-October, with short cyclonic downpours in Oct-Nov. Deep eaves, gutters, drip grooves.

• **Wind:** coastal cyclone belt. Trusses bolted down; every edge tile clipped; no light sheeting that can lift.

• **Soil:** black cotton (expansive) soil is common. A soil test decides the foundation; keep water and trees away from the walls.

• **Earthquake:** seismic zone III. RCC frame with lintel and ring bands.

• **Water:** groundwater is often hard with high fluoride. RO for drinking, softener if needed, matt fittings.

• **Termites and mosquitoes:** anti-termite treatment before the plinth; mesh on every opening.

• **Land:** agricultural land. Confirm conversion and the permission route before work starts.

Levels and heights

Level	Above finished ground
Finished ground (FGL)	+0'-0"
Poomukham floor	+1'-6"
Wet area floor	+1'-9"
House floor (FFL)	+2'-0"
Bathroom floors	+1'-11.5" (12 mm drop)
Door head / lintel band	+9'-0"
False ceilings (rooms)	+11'-6"
False ceilings (baths)	+10'-6"
Ground ring beam / first-floor slab	+12'-0"
First floor (finished)	+12'-0"
First-floor ring beam	+22'-0"
Front gable eaves / ridge	+11'-1" / +15'-10"
Main roof eaves (tile edge)	+20'-10"
Main ridge	+28'-4"

Wall types

Type	Build-up	Where
EXT	200 mm AAC + 20 mm external plaster + 12 mm internal plaster (~9 in)	Outer walls, kitchen north wall
WET	150 mm AAC + plaster both faces (~7 in): concealed plumbing walls	Walls with concealed plumbing
INT	100 mm AAC + plaster both faces (~5 in)	Other inner walls

General notes

• Dimensions are to wall centrelines unless marked 'clear'. Clear room sizes are on A-106 (ground) and A-107 (first floor).

• Concrete, steel, foundations and member sizes are by the structural engineer. Column positions are not shown and must be coordinated with the furniture layout.

• AAC: 150 mm galvanised mesh over every block-concrete joint; chases cut by machine; no hammering.

• All external sills, sunshades and copings get drip grooves; every external opening gets mosquito mesh.

• Wet rooms: waterproofing on floors, 12 in up the walls and 7 ft in showers; 48 h flood test before tiling.

• Skirting is flush with the plaster (no dust ledge). Grout in wet areas is epoxy.

• Pipes and conduits are laid before plaster and photographed with a tape measure in view, for future drilling.

• Keep 3 ft paved apron around the house, sloped away. No gardens, soak pits or big trees within 6-8 ft of walls.

• Two storeys: columns, footings, the first-floor slab and the stair are designed by the engineer for two floors; RCC column stubs at the terrace edge take the steel roof posts.

Hold points (stop and inspect)

Stage	Check before it is covered up	Who
Before design freeze	Soil test report, level survey of plot and road, water quality test (TDS, hardness, fluoride)	Owner, engineer
Excavation	Footing depth and bearing layer seen in the pit; no black soil left under footings	Structural engineer
Before each concrete pour	Reinforcement, cover blocks, laps and column positions checked; photos taken	Engineer / site supervisor
Plinth	Anti-termite treatment (certificate), fill compaction, DPC laid and cured	Supervisor
Before plaster	Conduits, pipes, AC sleeves, mesh over AAC joints; photos with a tape measure in view	Owner, supervisor
Wet rooms	Waterproofing coats, upturns, 48 h flood test passed before any tile is laid	Owner, plumber
Roof	Truss holding-down bolts, membrane and insulation, edge tiles clipped, flashing where the front gable and the kitchen wing meet the two-storey wall, valley gutter between them	Engineer, owner
Before handover	Water test on every floor slope and sill, plumbing pressure test, electrical insulation and earth test	Owner, MEP

Kerala Home, Phase 1


Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 170' deep, 27' to 40' wide, road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Design basis and general notes**
Sheet	**A-001**
Scale	-
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

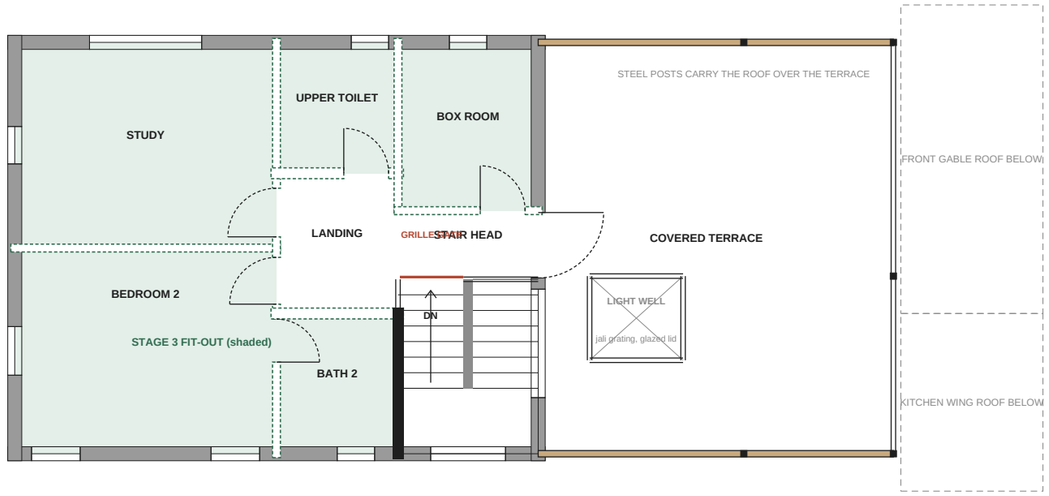

First floor through the stages: stair, frame, slab, roof and terrace in stage 1; outer walls (grey) in stage 2; inner walls and fit-out (green) in stage 3.

- Stage 1: stair walls (frame, slab, roof, terrace also stage 1)
- Stage 2: outer walls and windows
- Stage 3: inner walls and baths
- Stage 3 fit-out area
- Stage 1: grille gate at the stair head; temporary railings on open edges

Three stages, roof first

Stage	Scope	Rough cost
Stage 1: move in	• Whole ground floor with basic finishes: vitrified tiles, one coat of paint, granite kitchen counter with open shelves, ceilings only in the baths. • Footings, columns, first-floor slab and stair designed and built for two floors; RCC frame and ring beam up to roof level. • Tiled hip roof, front gable, kitchen wing and the steel-framed covered terrace with railings and side jali parapets; the whole first-floor slab waterproofed, with drains. • Upstairs left as an open, covered deck: temporary railings on the open edges and a lockable grille gate at the stair head. • Site works: sump, septic tank, drains, water and power connections; temporary fence.	Rs 30-34 lakh
Stage 2: upstairs shell and upgrades (1-2 years later)	• First-floor outer walls with window frames, grilles and shutters: a dry, lockable shell. • Kitchen cabinets, built-in wardrobes and the timber jali screens. • False ceilings in the rooms; final paint and any floor upgrades. • Compound wall, poomukham finishes and landscaping (outside the estimate).	Rs 7-11 lakh
Stage 3: first-floor fit-out	• Inner walls upstairs: Bedroom 2 and its bath, the study, the toilet and the box room. • Doors, wet-room waterproofing and fittings, floors, inside plaster and paint, false ceilings. • Wiring and lights from the sub-board, ACs, wardrobes and desks.	Rs 7-10 lakh

N

Build in stage 1 so the later stages are easy

- Plan approval for the full two-storey house now.
- Beams under the future upstairs walls (y 10.5, y 14 and y 16, and x 34.5) cast with the slab.
- Sleeves for the WC soil pipes, floor traps and shower drains cast into the slab at the upper bath and toilet; soil and vent stacks run to roof level and capped.
- Conduits for first-floor lights and fans cast into the slab; conduit from the main DB to the first-floor sub-board position.
- Water supply branches to the upper bath and toilet, capped; overhead tank on its final stand.
- Whole first-floor slab waterproofed in stage 1, with a drip edge all round.
- Columns, ring beam and lintel band set so the stage-2 outer walls and windows drop in; AC sleeves marked.
- Kitchen and wardrobe walls finished with the plumbing, sockets and hold-fasts for the stage-2 cabinets already in.

Living with stage 1

- Upstairs is a shaded, covered deck behind a grille gate: storage, drying clothes, a sit-out (no water use until stage 3).
- The ground floor stays cool from day one: it has the roof's shade and attic over it, not a bare slab.
- Stages 2 and 3 are dry, light work under cover: no roofing over an occupied house; materials up the stair and the terrace; a dust curtain at the stair hall.
- Splitting into three stages costs about Rs 2-4 lakh more overall (coming back, price rises, some repainting).
- Never defer: structure, anti-termite treatment, plinth, waterproofing, the roof, or pipes and conduits buried in walls and slabs.

Rates are rough 2026 village rates around Guntur; get contractor quotes on the Quantities sheet. Structure, beams and sleeves by the structural engineer.

Kerala Home, Phase 1


Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 170' deep, 27' to 40' wide, road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Construction phasing (roof first, three stages)**
Sheet	**A-002**
Scale	1:100 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

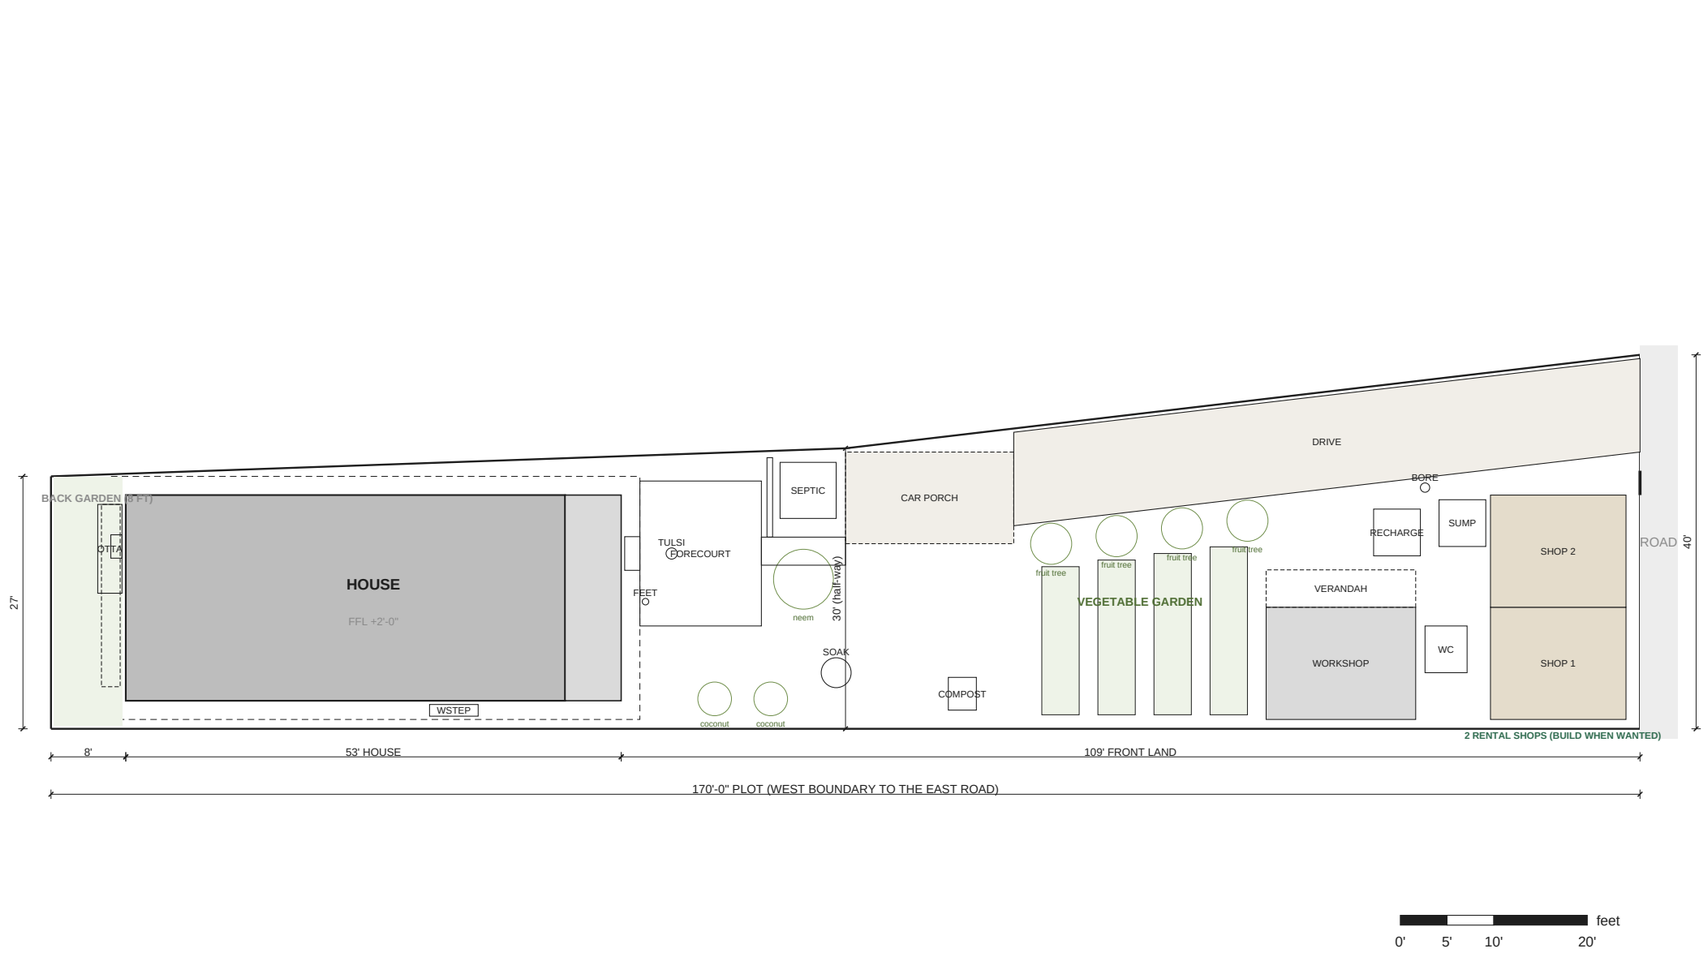

- SPARE: Back garden, 8 ft behind the house: herb and kitchen beds, clothes line, the den's garden sit-out under the pergola
- OTTA: Stone-paved sit-out under the creeper pergola, outside the den's garden door
- PERGOLA: Creeper pergola along the west wall (shades the master window; no big trees near walls)
- TULSI: Tulsi thara on the door axis in the forecourt
- PATH: Stone-paved forecourt in front of the poomukham, round the tulsi thara; a stone path from its north-east corner to the car porch
- CARPORT: Car porch 18 x 10 ft at the end of the drive on the north side, under a steel pergola with creepers (two-wheelers alongside)
- PATH2: Stone path from the forecourt to the car porch, under the neem
- DRIVE: Drive 10 ft wide along the slanted north boundary, from the road gate in the north-east to the car porch (vastu: the way in on the right as you face the house), gravel with paver wheel strips
- GATE: Sliding gate 12 ft at the north-east of the road front with a 3 ft wicket for people
- SEPTIC: Septic tank, 2 chambers, sealed RCC, in the plot's north-west quadrant between the forecourt and the car porch behind a hedge; the tanker reaches it from the car porch
- SOAK: Lined soak pit for septic effluent and grey water, on the south side about 23 ft from the house and 60 ft from the borewell
- HEDGE1: Hedge screening the septic tank from the forecourt
- RECHARGE: Rainwater recharge pit (roof run-off), between the workshop verandah and the drive
- VEG: Vegetable garden on the sunny south side: raised beds 4 ft wide on 6 ft centres with 2 ft paths, taps along the south edge; a row of fruit trees along the drive to the north
- COMPOST: Two compost pits, shaded, south of the car porch
- WORKSHOP: Carpentry workshop 16 x 12 ft, built cheap and demountable: bolted steel frame (galvanised SHS posts on pad footings with anchor bolts), precast RCC post-and-panel walls (the compound-wall system: panels lift out), an insulated metal sandwich roof screwed to steel purlins, a PCC floor on compacted fill; every part unbolts or lifts out for reuse; 3-phase power on a surface-run sub-board, 8 ft double doors on the steel frame, dust extraction, a lockable timber store at the west end
- WVERANDAH: Covered work verandah 16 x 4 ft on the north side facing the drive, for unloading and working timber; the roof sheet carried on to extra steel posts, a paver floor (lifts out)
- SUMP: Sump in the north-east quadrant beside the drive (tanker access from the drive), filled from the road main
- BORE: Borewell (if any), north-east quadrant beside the drive, about 60 ft from the soak pit
- SHOPS: Two small rental shops on the road front south of the gate (the south-east), built cheap and demountable (bolted steel frame, precast post-and-panel walls, an insulated sheet roof); they face the road directly and their rear doors open to the yard they share with the workshop; own meters; the toilet is shared with the workshop
- SHOP1: Rental shop 1, 12 x 14'-6", a rolling shutter bolted to the steel frame under a 1'-6" sheet canopy, a rear door to the work yard
- SHOP2: Rental shop 2, 12 x 14'-6", a rolling shutter bolted to the steel frame under a 1'-6" sheet canopy, a rear door to the work yard
- SITEWC: Shared toilet for the workshop and the shops: a ready-made FRP cabin (WC and basin) in the yard between them, door to the north (the drive side); a sealed pipe to the main septic tank; it lifts out for reuse
- Plot area about 5,398 sq ft; compound wall about 408 ft, the road face in exposed brick or local stone, the rest precast post-and-panel 5 ft.
- Ground falls 1:100 away from the house and down the drive to the road; roof water to the recharge pit.

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh


Plot 170' deep, 27' to 40' wide, road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Site plan: the whole plot**
Sheet	**A-101**
Scale	1:200 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 170' deep, 27' to 40' wide, road on east

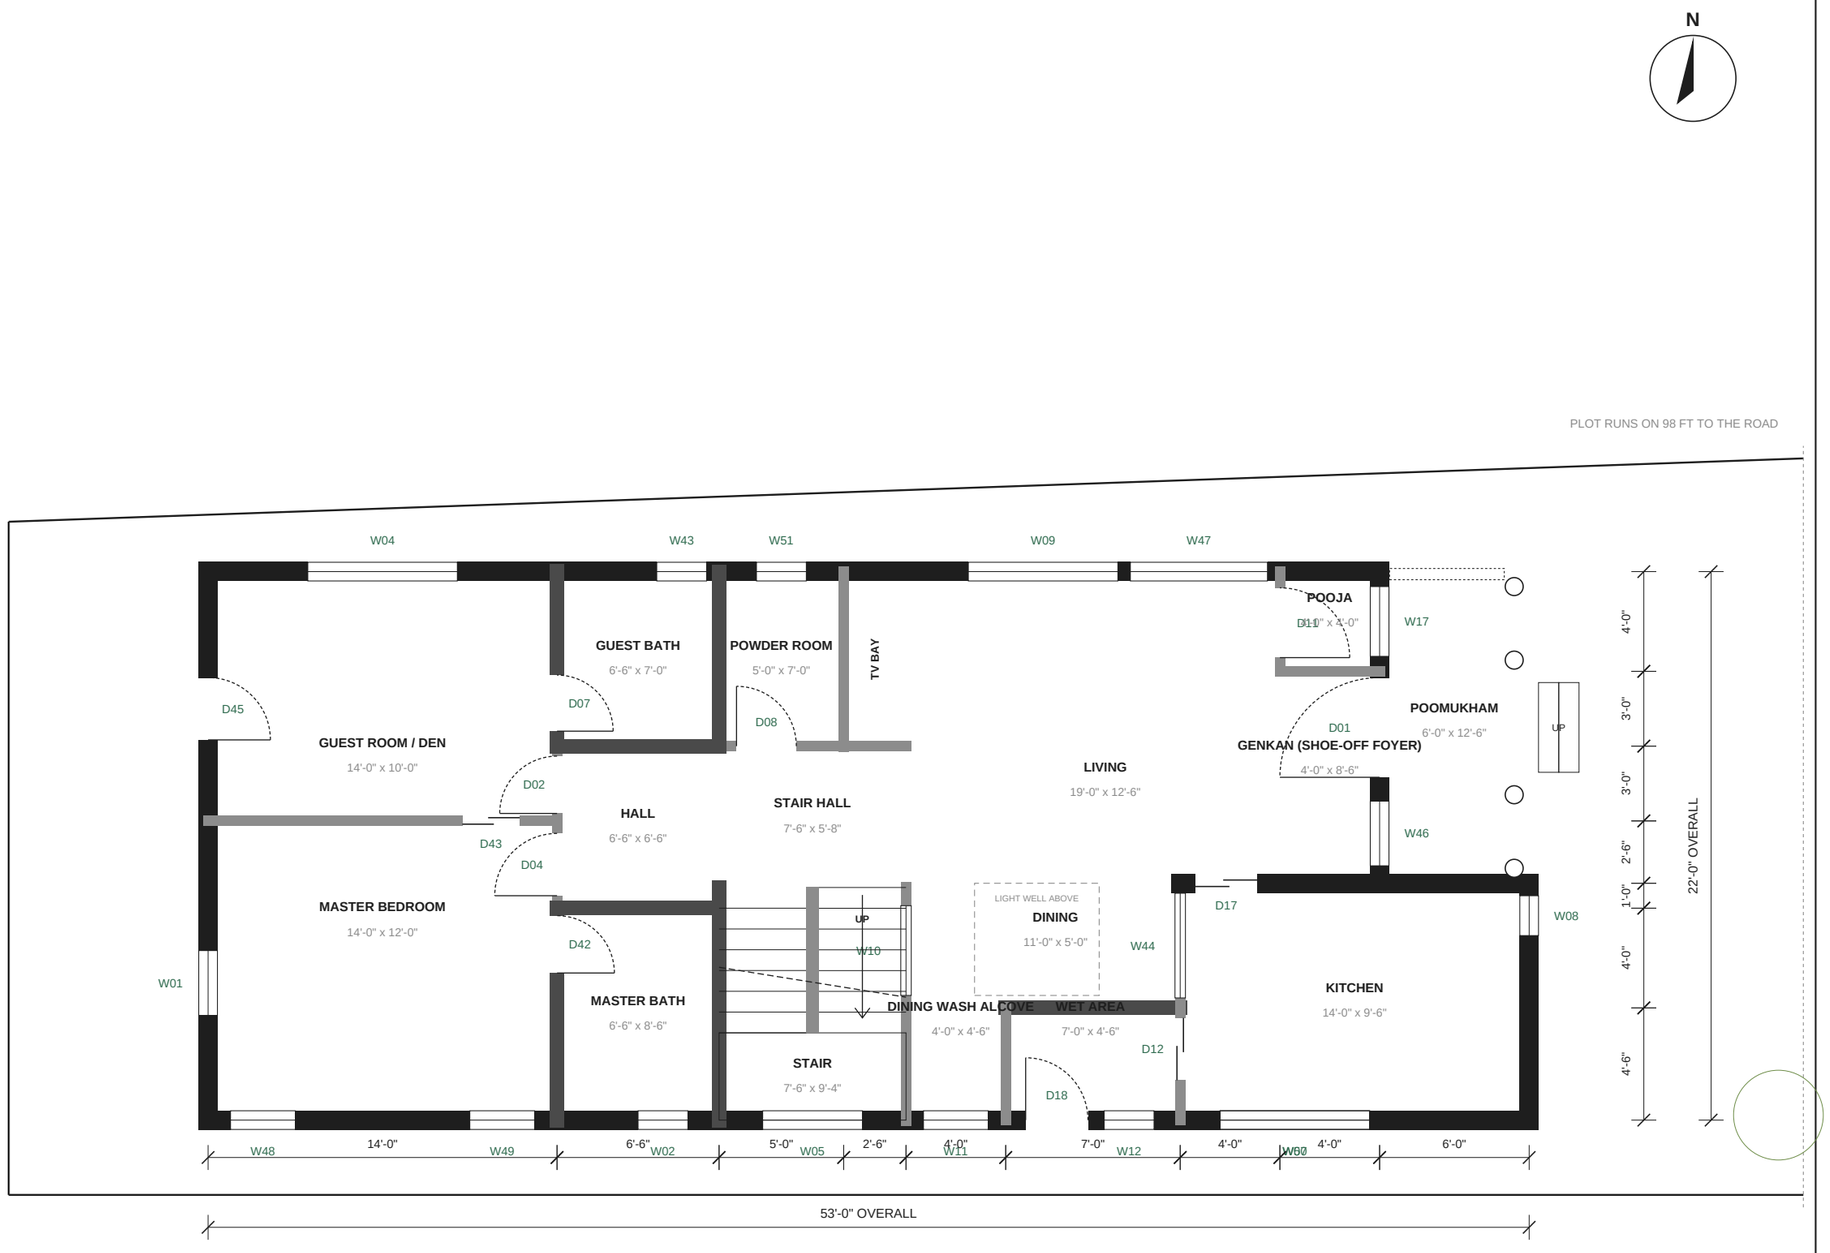

EXT: 200 mm AAC + 20 mm external plaster + 12 mm internal plaster (~9 in)
WET: 150 mm AAC + plaster both faces (~7 in): concealed plumbing walls
INT: 100 mm AAC + plaster both faces (~5 in)

0' 5' 10' 20' feet


Door swings dashed. D = door, W = window (A-401).
Section lines and clear sizes on A-106; levels on A-108.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Ground floor plan**
Sheet	**A-102**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 170' deep, 27' to 40' wide, road on east

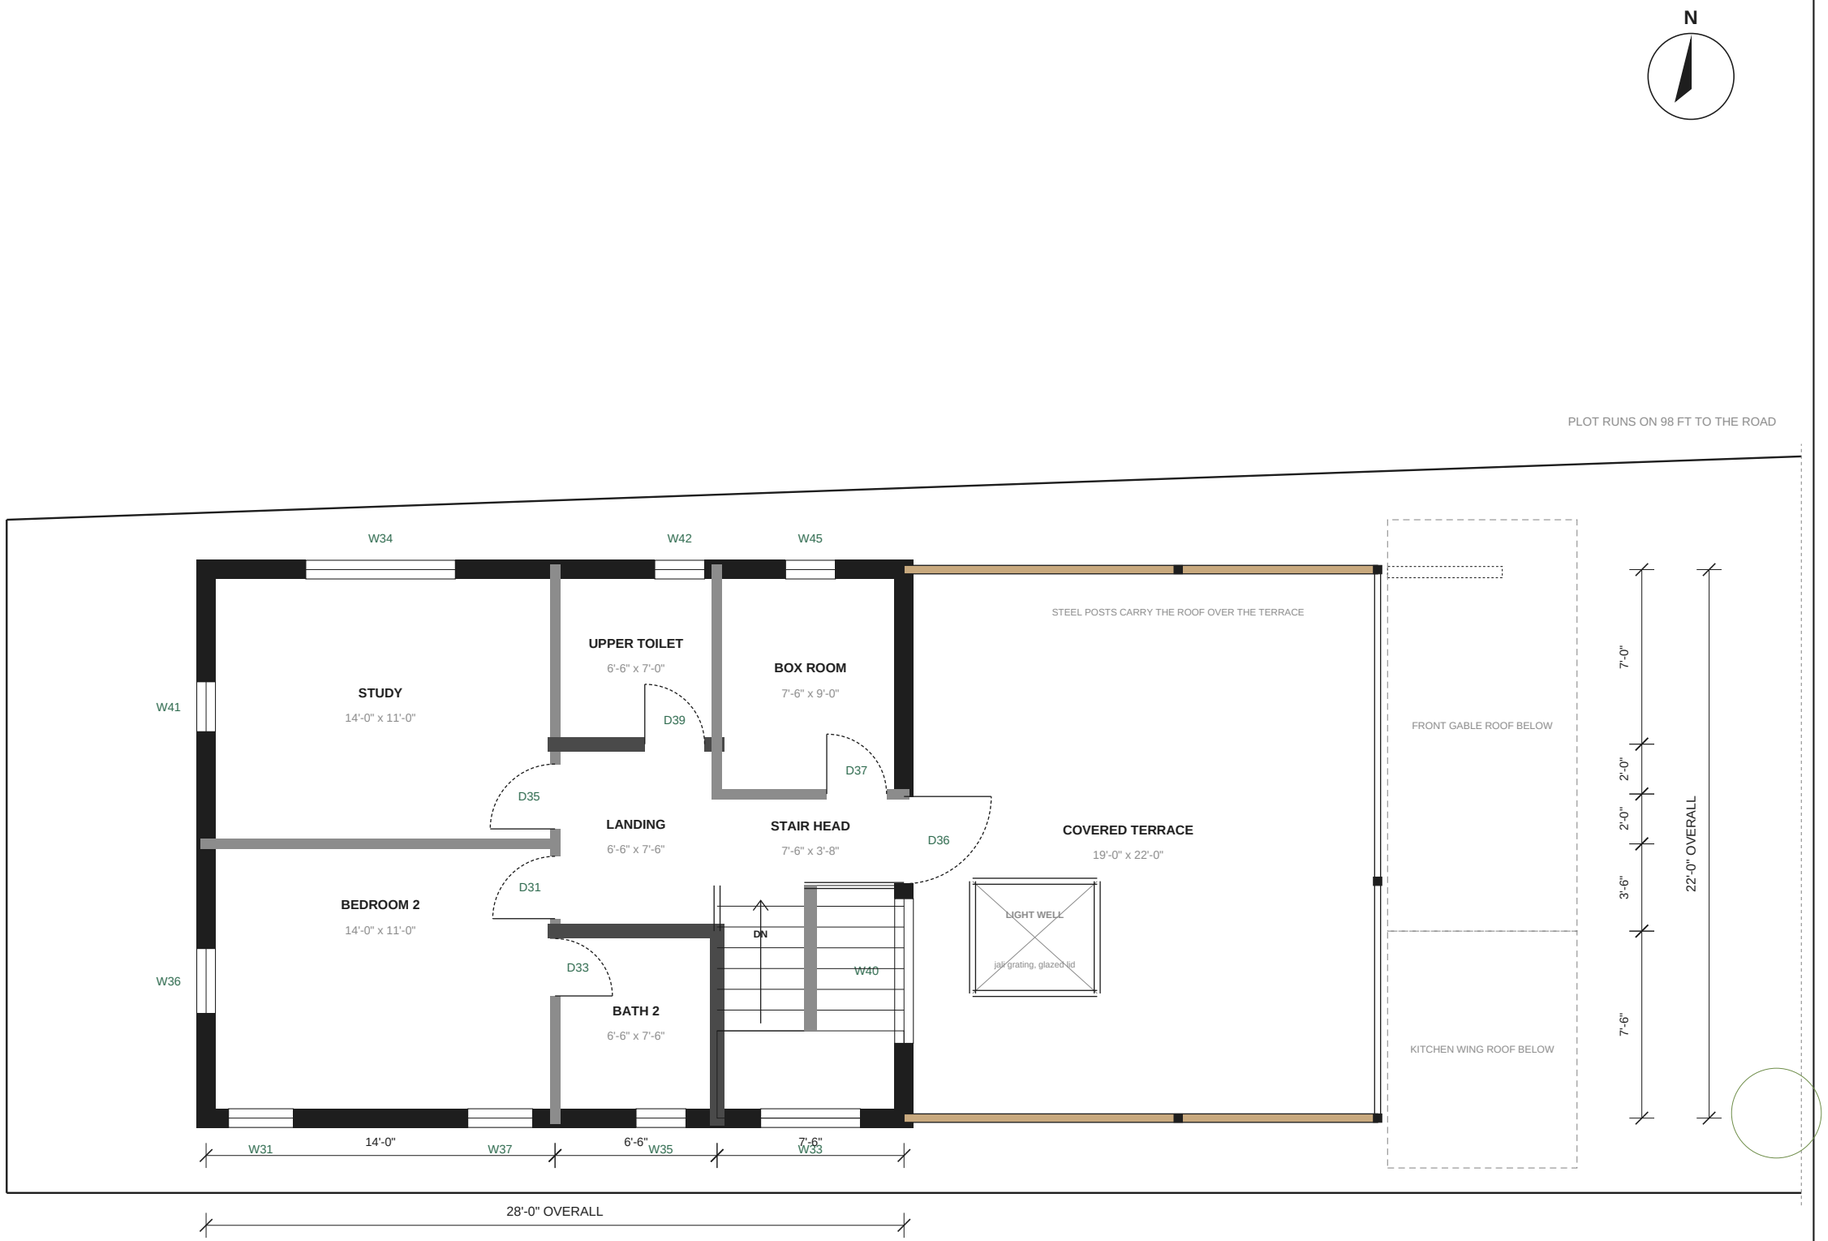

EXT: 200 mm AAC + 20 mm external plaster + 12 mm internal plaster (~9 in)
WET: 150 mm AAC + plaster both faces (~7 in): concealed plumbing walls
INT: 100 mm AAC + plaster both faces (~5 in)

0' 5' 10' 20' feet

Door swings dashed. D = door, W = window (A-401).
First floor at +12'-0". Railings 3'-6" high (double lines). The front half is a covered terrace under the main roof, on steel posts.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**First floor plan**
Sheet	**A-103**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 170' deep, 27' to 40' wide, road on east



Furniture key (full specs in schedules)

- **F10** King bed 6' x 6'6" + headboard, head to the south wall between two windows
- **F12** WC
- **F13** Shower glass partition
- **F14** Wash basin on the north wall, mirror cabinet above
- **F19** Dressing table with a mirror and drawers on the east wall, beside the dressing bay
- **F11** Floating bedside shelf with a drawer, reading light and charging point above (x2)
- **F06** Built-in sliding wardrobe 8' on the north wall
- **F16** WC
- **F17** Wash basin with a mirror and a feature tile wall on the east wall, past the door swing
- **F20** Sofa-cum-bed 6'-6" x 3' under the north window W04
- **F67** Armchair facing the TV
- **F66** Coffee table 2' x 1'-6"
- **F23** Low TV unit on the south wall, TV above, centred on the sofa-bed and the north window
- **F57** Cupboard under the upper flight where it rises above 7 ft
- **F58** Low store under the half landing
- **F48** WC
- **F49** Wash basin with a mirror cabinet above
- **F50** Shower glass partition
- **F24** Dining table 5'-6" x 2'-6" under the light well
- **F27** Dining chair at the east end of the table
- **F28** Built-in bench on the dining's south wall, storage below
- **F33** Granite serving ledge 9 in deep under the kitchen hatch
- **F44** Water / RO and crockery counter 1'-9" deep under the window, glass-shuttered crockery below
- **F21** Hand-wash basin with a mirror above, on the east wall
- **F29** Utility sink counter on the south wall, where vessels are washed
- **F62** Dish-drying rack over the utility sink
- **F61** Ceiling clothes airer on pulleys
- **F31** Fold-away clothesline in the south walkway behind the master
- **F34** L-counter, south run
- **F68** Full-height corner unit in the south-east corner
- **F60** Utensil rail with hooks beside the hob
- **F35** L-counter, east run
- **F65** Prep sink, single bowl + drainboard, centred under the window
- **F37** Tall pantry unit 2', microwave inside, against the east run
- **F36** Refrigerator on the north wall, grouped with the pantry, clear of the sliding entry
- **F53** Floating TV console 5' x 1'-4" wall-hung at 1'-3"
- **F38** Sofa 5'
- **F39** Coffee table 3'2" x 2', 1'-6" from the sofa
- **F45** Armchair facing north to the sofa group
- **F46** Armchair facing north to the sofa group
- **F47** Teak slat lining on the bay's back wall behind the TV
- **F59** Vilakku madam
- **F52** Shoe bench 3'-3" in the genkan
- **F26** Pooja mandapam on the east wall
- **F41** Oonjal
- **F42** Charupadi
- **F69** Charupadi

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Furniture layout, ground floor**
Sheet	**A-104**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 170' deep, 27' to 40' wide, road on east




Furniture key (full specs in schedules)

- **F71** King bed 6' x 6'6" + headboard, head to the south wall between the two windows
- **F72** Floating bedside shelf with a drawer, reading light and charging point above (x2)
- **F74** Dresser with a mirror and drawers on the east wall, south of the bath door
- **F75** Built-in sliding wardrobe 8' on the north wall from the west wall, doors facing the bed, lofts above
- **F77** WC
- **F78** Wash basin with a mirror cabinet above on the north wall
- **F79** Shower glass partition
- **F91** Linear two-station desk 9' x 2' under the north window W34
- **F92** Sofa-cum-bed 6' in front of the library wall
- **F95** Full-height library wall on the south wall
- **F98** WC
- **F99** Wash basin with a mirror cabinet above
- **F70** Shower glass partition
- **F84** Built-in diwan 6' against the box room wall
- **F85** Low coffee table
- **F86** Cane armchair
- **F87** Cane armchair
- **F88** Clothes-drying rails beside the washer, laundry corner in the south-west
- **F30** Washing machine 2' x 2' in the laundry corner against the stair wall, its supply, socket and floor trap cast in stage 1
- **F80** Teak lamp shelf with a picture light, on the wall you face at the top of the stair
- **F82** Shelving on the west wall for linen, suitcases and festival things
- **F89** Planter boxes along the whole east edge

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Furniture layout, first floor**
Sheet	**A-105**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

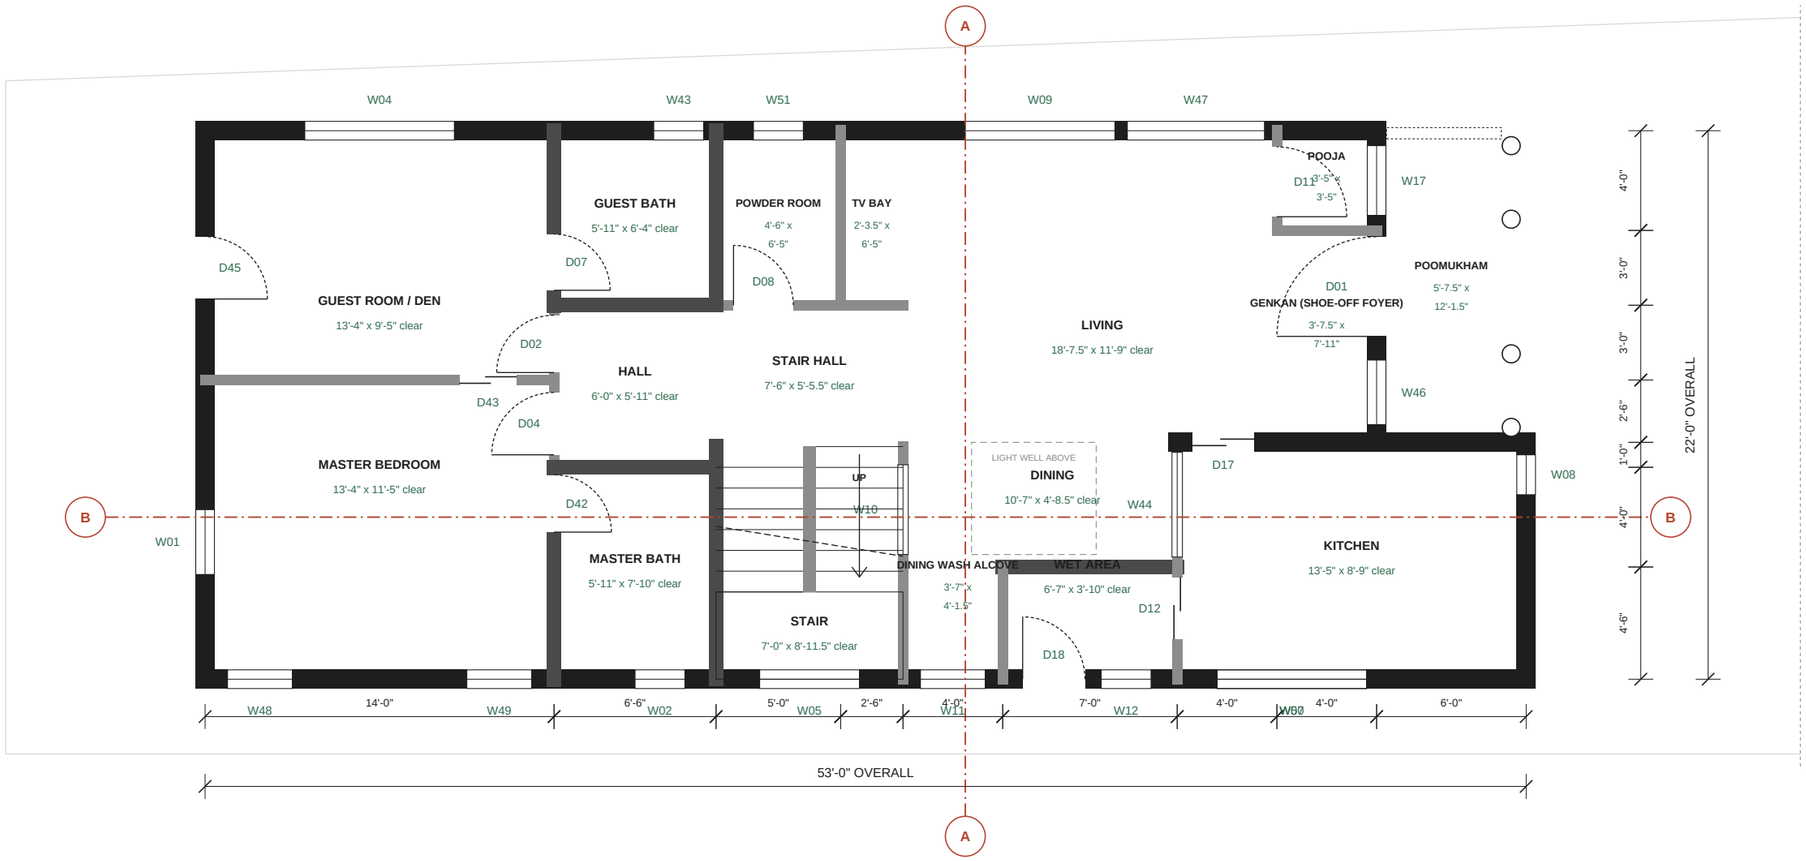

Clear sizes are wall face to wall face after plaster (green). Grid dimensions are to wall centrelines.

Sections A-A and B-B on A-301 (marked on the ground floor). Check every furniture item against the clear size before ordering.

Column positions (by engineer) must avoid door swings, wardrobes and the TV wall.

0' 5' 10' 20' feet

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh


Plot 170' deep, 27' to 40' wide, road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Working plan, ground floor: clear sizes and sections**
Sheet	**A-106**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 170' deep, 27' to 40' wide, road on east

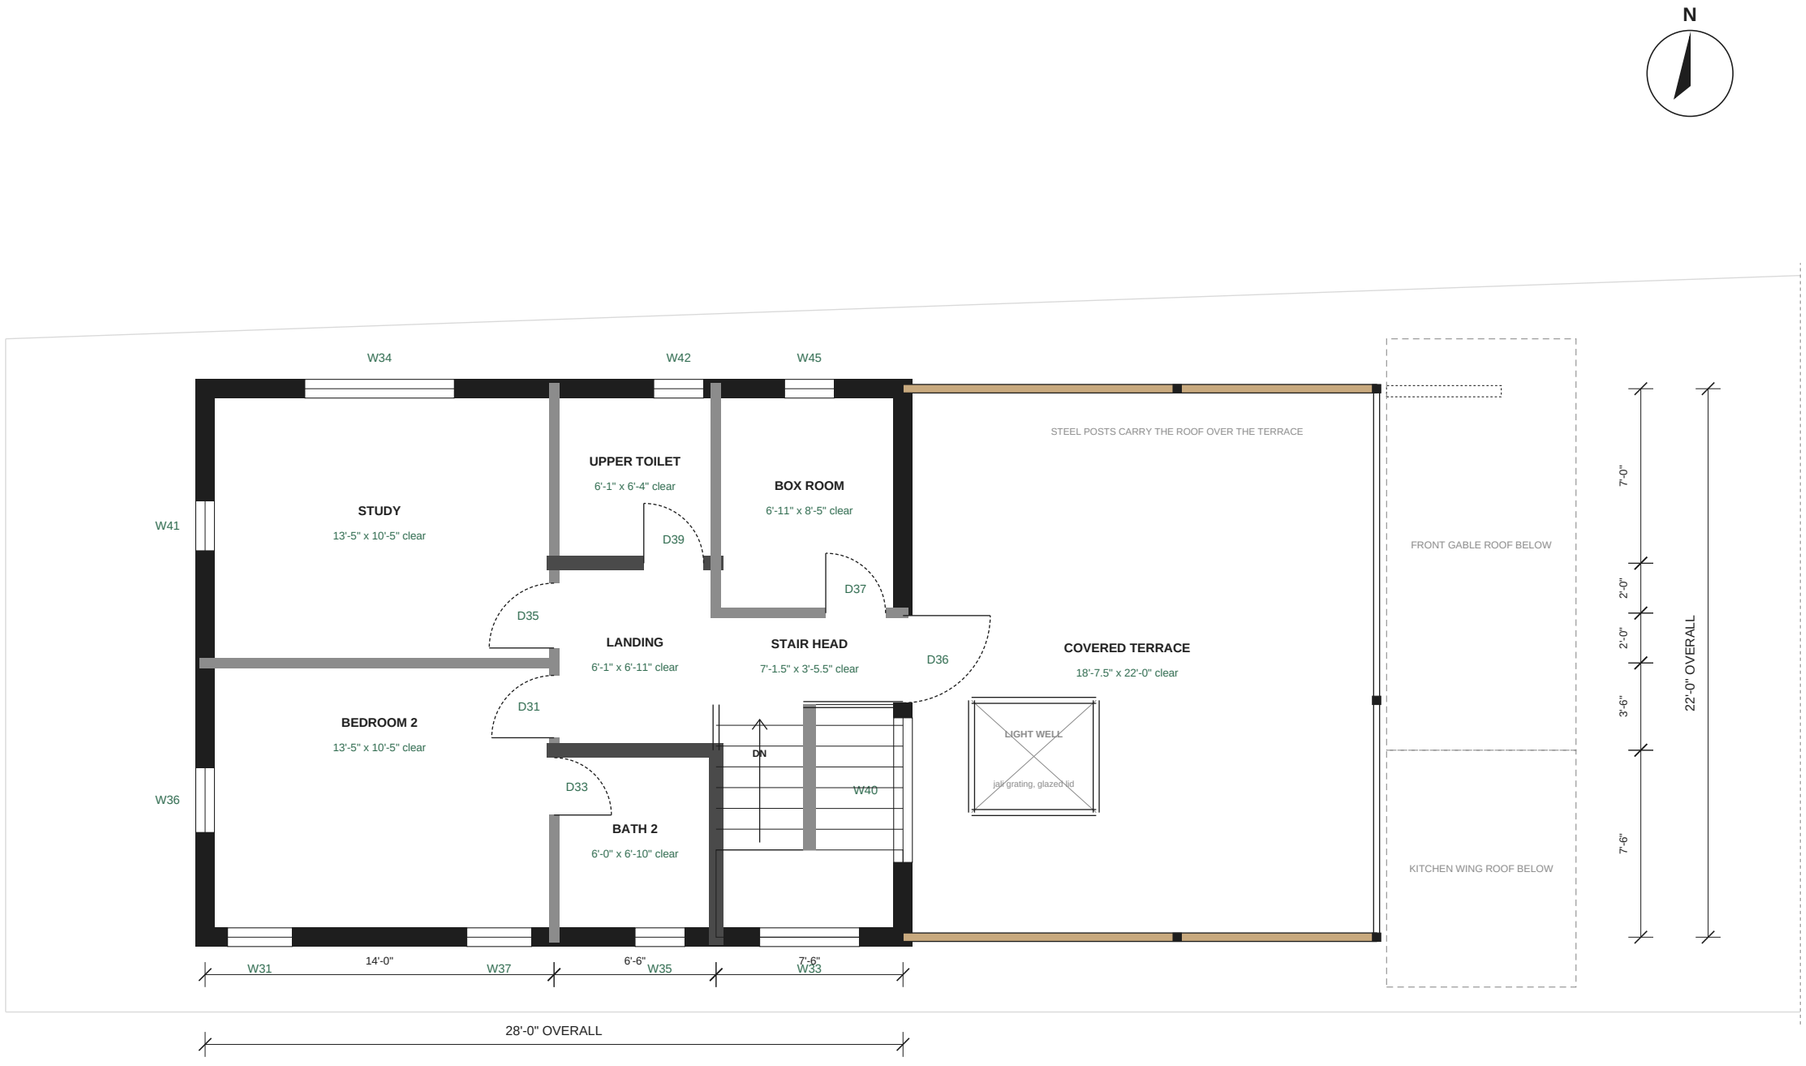

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Working plan, first floor: clear sizes**
Sheet	**A-107**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Clear sizes are wall face to wall face after plaster (green). Grid dimensions are to wall centrelines.

Sections A-A and B-B on A-301 (marked on the ground floor). Check every furniture item against the clear size before ordering.

Column positions (by engineer) must avoid door swings, wardrobes and the TV wall.



Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 170' deep, 27' to 40' wide, road on east



- Red oxide / Kota stone
- Matt vitrified 2x2
- Anti-skid ceramic, waterproofed
- Flamed granite
- Terracotta anti-skid tile, waterproofed

Floor detailing

- Skirting 4 in high, set flush with the plaster face (plaster stops in a groove above it), so no ledge collects dust.
- Bathrooms 12 mm below the bedroom floor with a sloped granite threshold: no raised step to trip on, water stays in.
- First floor: the upper bath and the covered terrace sit on the slab over ground-floor rooms: waterproof, flood-test 48 h, then tile.
- Shower zone: linear drain at the far end, floor falls 1:60 only inside the wet zone; dry zone floor nearly flat.
- Poomukham and steps: flamed or leather-finish stone. Polished granite is slippery when wet.
- Kitchen: mid-tone matt floor; white glossy tile shows every stain and is slippery with oil.
- Leave 5 mm expansion gaps at walls under the skirting and every 15-20 ft in large floors.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Floor finishes and levels, ground floor**
Sheet	**A-108**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground



- Red oxide / Kota stone
- Matt vitrified 2x2
- Anti-skid ceramic, waterproofed
- Flamed granite
- Terracotta anti-skid tile, waterproofed

Floor detailing

- Skirting 4 in high, set flush with the plaster face (plaster stops in a groove above it), so no ledge collects dust.
- Bathrooms 12 mm below the bedroom floor with a sloped granite threshold: no raised step to trip on, water stays in.
- First floor: the upper bath and the covered terrace sit on the slab over ground-floor rooms: waterproof, flood-test 48 h, then tile.
- Shower zone: linear drain at the far end, floor falls 1:60 only inside the wet zone; dry zone floor nearly flat.
- Poomukham and steps: flamed or leather-finish stone. Polished granite is slippery when wet.
- Kitchen: mid-tone matt floor; white glossy tile shows every stain and is slippery with oil.
- Leave 5 mm expansion gaps at walls under the skirting and every 15-20 ft in large floors.

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 170' deep, 27' to 40' wide, road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).


Stage	Draft for professional review (duplex option)
Drawing	**Floor finishes and levels, first floor**
Sheet	**A-109**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 170' deep, 27' to 40' wide, road on east

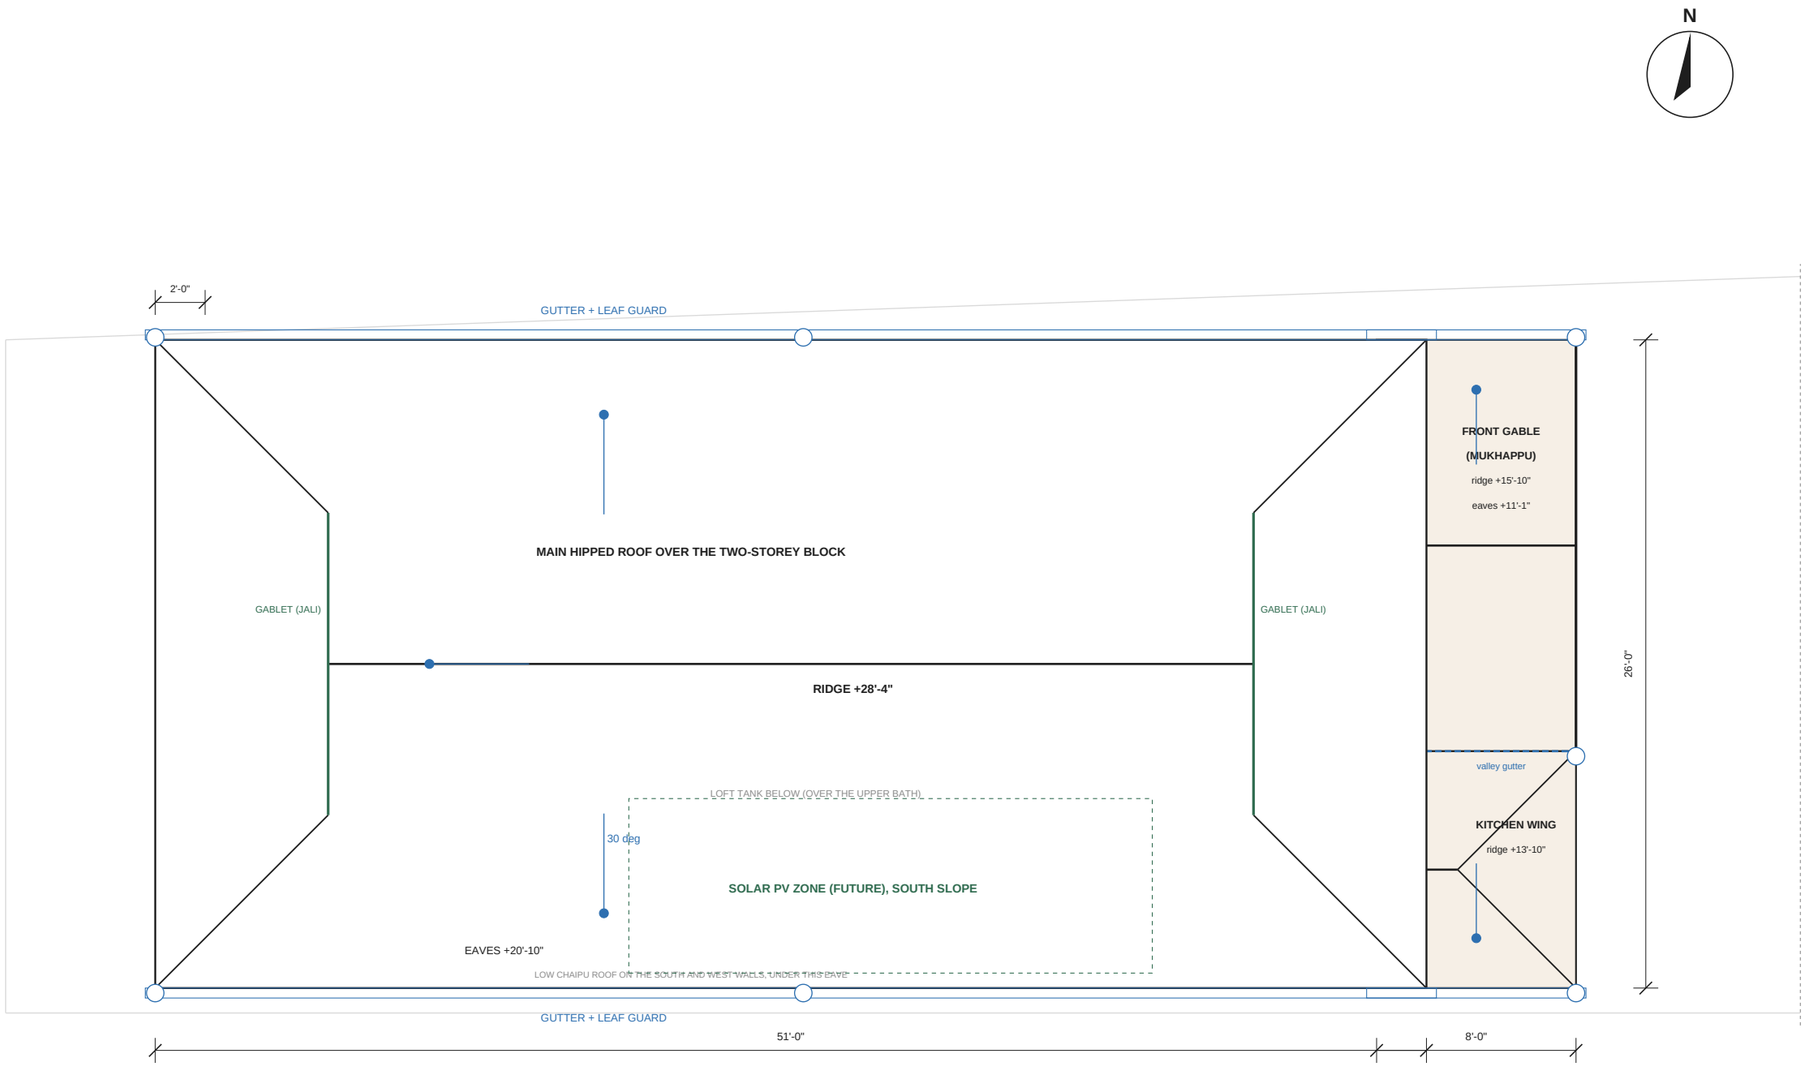


Roof detailing (Guntur: heat, cyclone wind, short heavy rain)

- Every tile along eaves, verges, hips and ridges clipped or screwed; every third row elsewhere. Cyclone winds lift loose tiles first at the edges, and the main roof is now 20 ft up.
- Main roof trusses bolted to the first-floor ring beam; front gable and kitchen wing trusses to the ground-floor ring beam; purlins cleated, not just welded tacks.
- Where the front gable meets the east wall of the two-storey block: GI / aluminium apron flashing chased into the wall, with a counter-flashing; the main roof's east eave overhangs it by 2 ft. The valley between the gable and the kitchen wing gets a 12 in valley gutter draining east to its own downpipe.
- Eaves 2'-0" beyond the wall line (kept inside the 27 ft plot on the north) with drip edges and gutters on both roofs; downpipes at 6 points into the sump filter, overflow to the road drain.
- Over the covered terrace the main roof sits on galvanised steel posts and steel trusses instead of walls; same tiles and fixings. No ridge ventilator: hot air under the roof escapes at the terrace's open sides.
- Attic over the first-floor rooms vented at the ridge and soffits with insect mesh; 50 mm insulation on the deck. Loft water tank on a steel platform over the upper bath.
- Leave a 25 mm conduit from roof to DB now for future solar PV on the south slope.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Roof plan**
Sheet	**A-110**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

NORTH ELEVATION

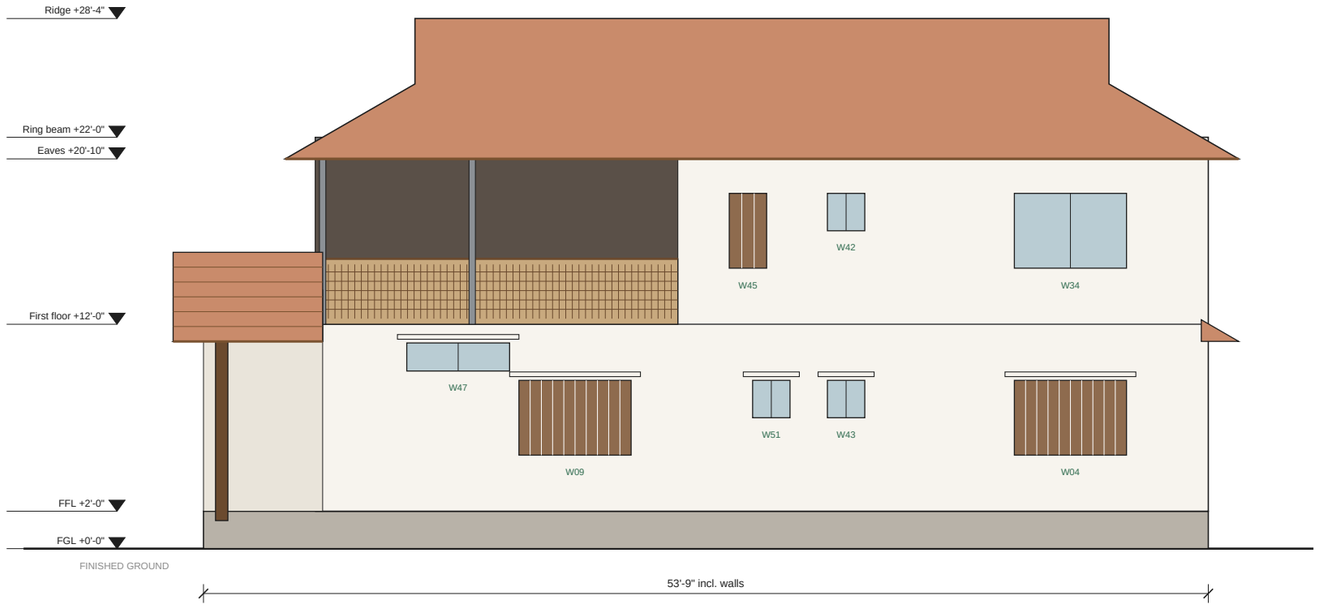

SOUTH ELEVATION



Two-tier roof: the main hipped roof over the two-storey block (on steel posts over the covered terrace), the low front gable over the verandah (centred on the main door) and a lower hipped wing over the kitchen front. Brown line = fascia with gutter.

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)


Guntur, Andhra Pradesh

Plot 170' deep, 27' to 40' wide, road on east


Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**North and south elevations**
Sheet	**A-201**
Scale	1:100 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

EAST ELEVATION (ROAD SIDE)

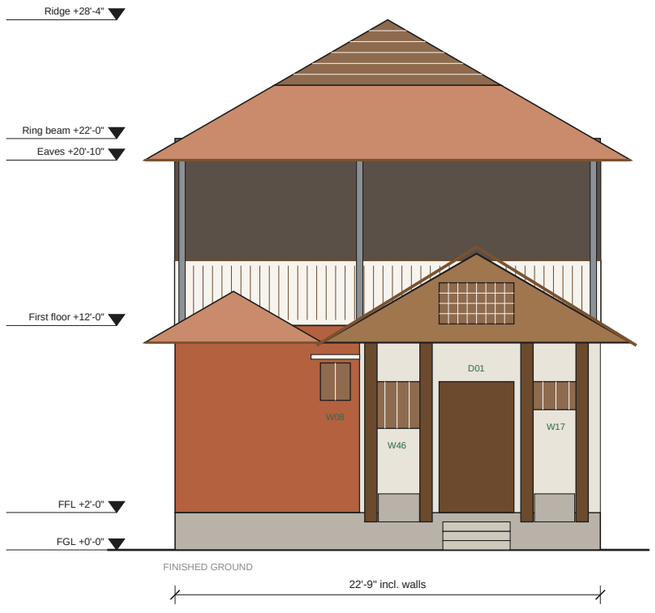

WEST ELEVATION

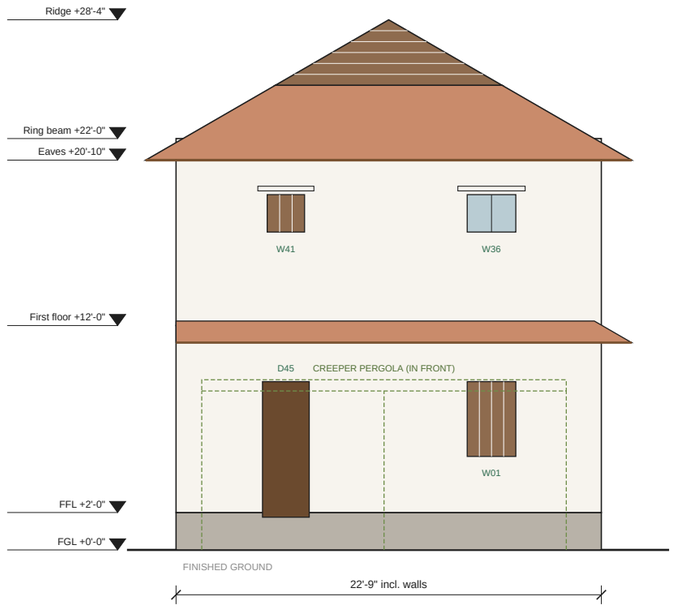

- Front gable (mukhappu) over the verandah only, centred on the main door; a lower hipped wing over the kitchen front. The covered terrace sits 6 ft back behind them, open to the road behind a railing, with closed jali parapets on the north and south sides.
- Plinth face clad 2 ft in rough stone: the splash zone stays clean and does not erode.
- West wall: the first floor has only small high windows on the west (afternoon sun). The creeper pergola shades the ground floor.
- Entrance: 3 risers of 6 in, 12 in treads, flamed granite with a nosing; foot-wash tap beside the steps.

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)


Guntur, Andhra Pradesh

Plot 170' deep, 27' to 40' wide, road on east


Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**East (road) and west elevations**
Sheet	**A-202**
Scale	1:100 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

SECTION B-B: LONG SECTION THROUGH THE MASTER SUITES AND BATHS ON BOTH FLOORS, THE STAIR, THE DINING UNDER THE LIGHT WELL WITH THE COVERED TERRACE ABOVE

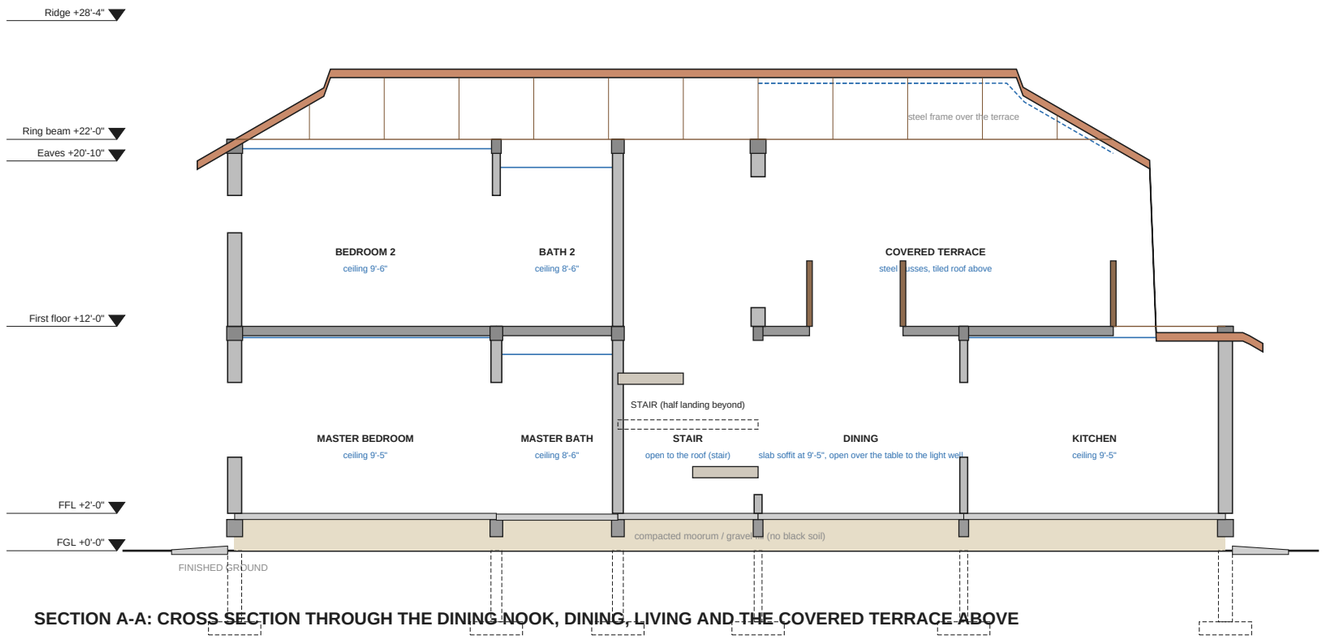

SECTION A-A: CROSS SECTION THROUGH THE DINING NOOK, DINING, LIVING AND THE COVERED TERRACE ABOVE

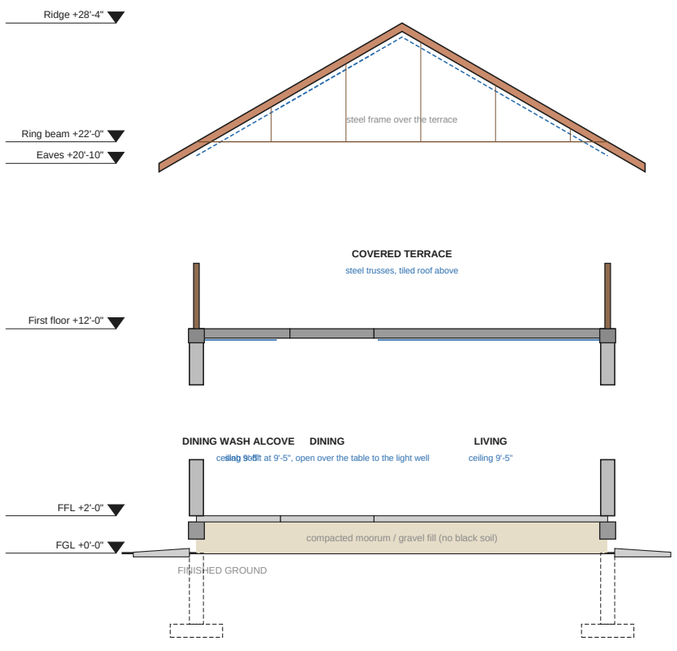

Section notes

- Clay tiles on battens, membrane, 50 mm insulation, cement-fibre deck on purlins (attic over the first-floor rooms ventilated at ridge and soffit).
- Main roof trusses bolted to the first-floor ring beam; front gable and kitchen wing trusses to the ground-floor ring beam (cyclone uplift).
- First-floor RCC slab over the whole two-storey block; over the front half it is the covered terrace, waterproofed, under the main roof on galvanised steel posts and steel trusses.
- RCC lintel band at door-head level on both floors (seismic zone III). AAC walls in an RCC frame; mesh over every block-to-concrete joint.
- Ground-floor rooms have a plastered slab soffit at about 9'-5" (blue); first-floor rooms have insulated false ceilings; the stair and terrace are open to the roof.
- Dog-leg stair, 16 risers of 7.5 in; teak handrail; timber jali to the dining and to the terrace.
- Plinth beam with DPC; plinth fill of compacted moorum, never black soil; anti-termite treatment at every layer.
- Footings dashed and indicative only: type and depth by the engineer after the soil test (two-storey loads).

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)


Guntur, Andhra Pradesh

Plot 170' deep, 27' to 40' wide, road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Sections A-A and B-B**
Sheet	**A-301**
Scale	1:100 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

DOORS (viewed from the side the door swings into; vents above inner doors, 7'-6" to 9'-0"; none at bedrooms or bathrooms)

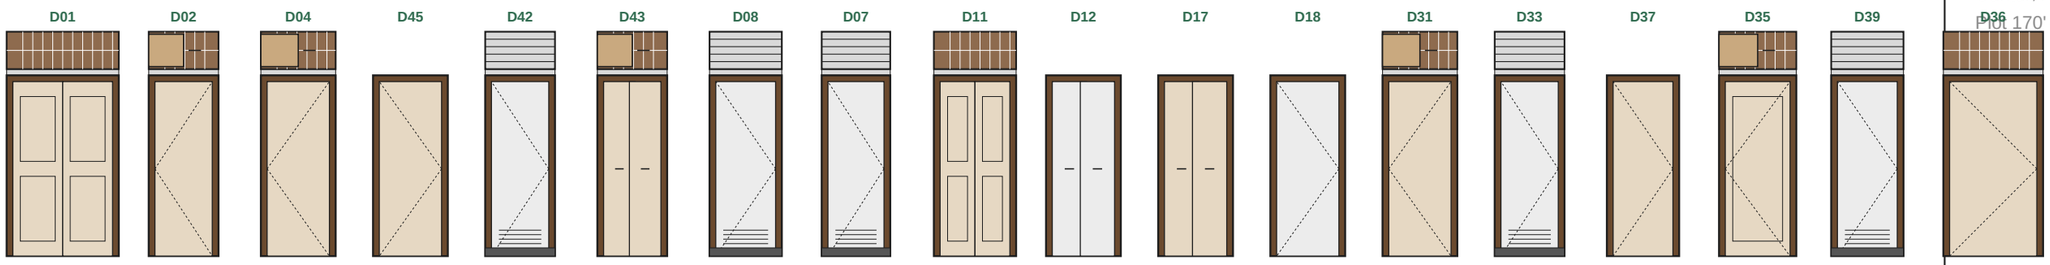

D01 — 4'-0" x 7'-0"
Teak, double leaf, panelled; 4 in raised threshold outside slope; tower bolts + mortise lock
Above: open jali

D02 — 2'-3.5" x 7'-0"
MS frame + grill shutter outside, mesh door inside; 1 in weather bar
Above: closable jali

D04 — 2'-6" x 7'-0"
Flush, teak veneer
Above: closable jali

D45 — 2'-6" x 7'-0"
Teak frame, glazed upper half, steel grille shutter outside

D42 — 2'-3.5" x 7'-0"
Flush, waterproof (WPC/FRP)
Above: louvres

D43 — 2'-3.5" x 7'-0"
Teak veneer pocket door, acoustic seals
Above: closable jali

D08 — 2'-5" x 7'-0"
WPC/FRP shutter, frame on granite base; louvre at bottom
Above: louvres

D07 — 2'-3" x 7'-0"
Flush, waterproof (WPC/FRP)
Above: louvres

D11 — 2'-9.5" x 7'-0"
Carved teak, double leaf (opens inward, clear of the living; faces west, family faces east)
Above: open jali

D12 — 2'-6" x 7'-0"
WPC/FRP shutter, frame on granite base

D17 — 2'-6" x 7'-0"
Teak frame, glazed sliding door, 2'-6" (closes off cooking smoke)

D18 — 2'-6" x 7'-0"
Steel, lockable, louvred top

D31 — 2'-6" x 7'-0"
Flush, teak veneer
Above: closable jali

D33 — 2'-3.5" x 7'-0"
Flush, waterproof (WPC/FRP)
Above: louvres


D37 — 2'-5" x 7'-0"
Flush, teak veneer, louvred top

D35 — 2'-7" x 7'-0"
Teak frame, glazed upper panel (frosted), acoustic seals
Above: closable jali

D39 — 2'-5" x 7'-0"
Flush, waterproof (WPC/FRP)
Above: louvres

D36 — 3'-6" x 7'-0"
Teak frame, glazed, 3'-6", jali vent above
Above: open jali

WINDOWS, GROUND FLOOR (viewed from inside; sill and head heights above the floor)

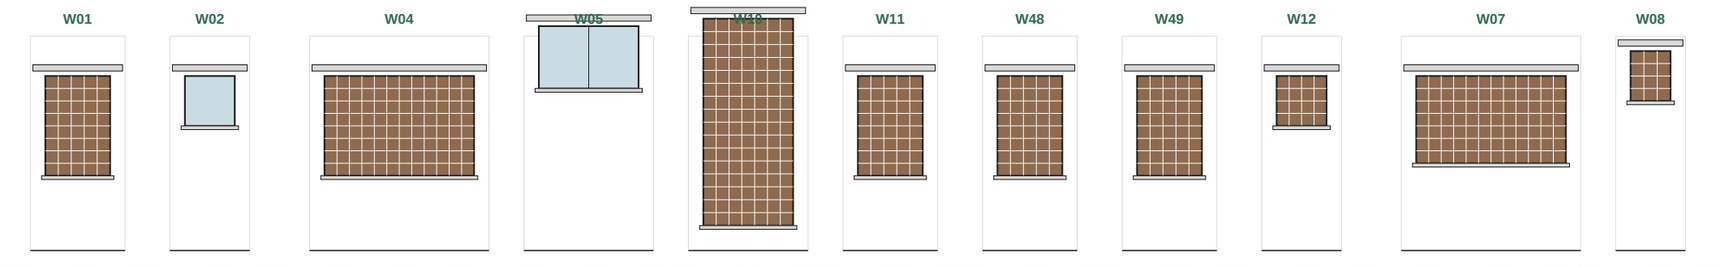

W01 — 2'-7" wide, sill 3'-0", head 7'-0"
Timber jali + glazed shutters (west, on the y 8.5 axis under W36; shaded by the pergola and the chaipu)

W02 — 2'-0" wide, sill 5'-0", head 7'-0"
Frosted casement, top-hung vent (2 ft bath window, centred under Bath 2's window above)

W04 — 6'-0" wide, sill 3'-0", head 7'-0"
Teak casement, glazed (6 ft), fixed jali on the lower 2 ft (privacy from the neighbour 2 ft away), hood above

W05 — 4'-0" wide, sill 6'-6", head 9'-0"
Glazed casement over the half landing (sill 1'-6" above it, fixed lower pane), centred on the stair; the clerestory W33 stacks above it

W33 — 3'-7" wide, sill 1'-0", head 9'-3.5"
Timber jali screen between the stair and the dining, up to the slab (borrowed light, air into the stair chimney)

W11 — 2'-7" wide, sill 3'-0", head 7'-0"
Timber jali + glazed shutters (2'-7" room window) centred on the alcove: daylight for the dining


W48 — 2'-7" wide, sill 3'-0", head 7'-0"
Timber jali + glazed shutters, west of the bed head (stacked under W31)

W49 — 2'-7" wide, sill 3'-0", head 7'-0"
Timber jali + glazed shutters, east of the bed head (stacked under W37)

W12 — 2'-0" wide, sill 5'-0", head 7'-0"
Jali vent over the utility sink (2 ft vent window)

W07 — 6'-0" wide, sill 3'-6", head 7'-0"
Timber jali + glazed shutters (clear of the terrace post over x 61; the sink centred under it)

W08 — 1'-7" wide, sill 6'-0", head 8'-0"
High ventilator, jali + louvres above the counter (smoke and hot air out; the hob wall below stays solid)

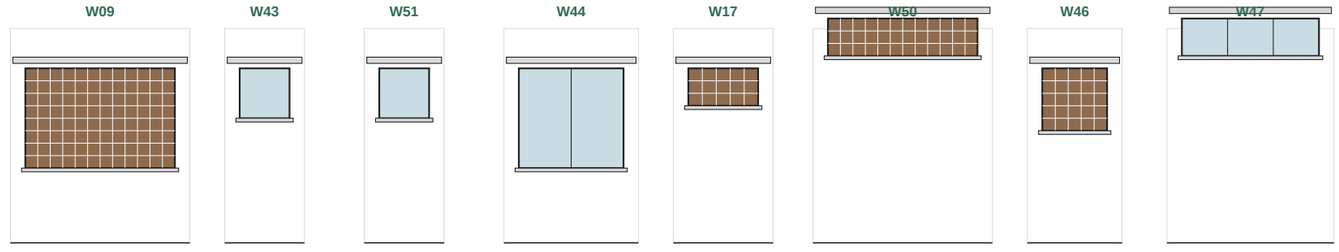

W09 — 6'-0" wide, sill 3'-0", head 7'-0"
Teak casement, glazed (6 ft), fixed jali on the lower 2 ft (privacy from the neighbour), hood above

W43 — 2'-0" wide, sill 5'-0", head 7'-0"
Frosted casement, top-hung vent

W51 — 2'-0" wide, sill 5'-0", head 7'-0"
Frosted casement, top-hung vent

W44 — 4'-2.5" wide, sill 3'-0", head 7'-0"
Serving hatch over a granite counter, glazed sliding shutters (close while cooking)

W17 — 2'-9.5" wide, sill 5'-6", head 7'-0"
High vent to the poomukham, jali + mesh (lamp smoke out)

W50 — 6'-0" wide, sill 7'-6", head 9'-0"
High jali ventilator above the window W07 (hot air out under the ceiling)

W46 — 2'-7" wide, sill 4'-6", head 7'-0"
Timber jali + glazed shutters over the shoe bench (light from the poomukham)

W47 — 5'-6" wide, sill 7'-6", head 9'-0"
Glazed clerestory, top-hung: sky light above the neighbour's wall, hot air out under the slab

- All windows: insect mesh (SS or fibreglass) on a separate openable or sliding frame, so glass can be cleaned.
- MS safety grill inside the shutters on every ground-floor window; one escape window per bedroom with an openable grill section.
- Teak is costly and must be seasoned; good alternatives in Guntur: sal or hard pinkado for frames, UPVC for wet-side windows.
- Door frames 5 x 2.5 in; frames in bathrooms and wet areas stand on granite or WPC blocks, never touching the wet floor.
- Hardware: SS 304 hinges and screws (hard water and humidity rust MS); magnetic door stoppers on every door.
- Sunshade (chajja) over every window projects 1'-6" to 2'-0" with a drip groove under the front edge.

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)


Guntur, Andhra Pradesh

Plot 170' deep, 27' to 40' wide, road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Door details and ground-floor windows**
Sheet	**A-401**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

WINDOWS, FIRST FLOOR (viewed from inside; sill and head heights above the first floor)

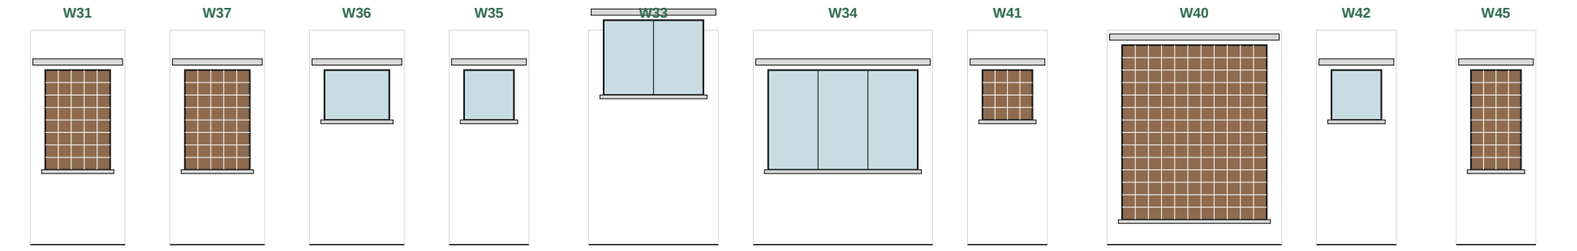

2'-7" wide, sill 3'-0", head 7'-0"	2'-7" wide, sill 3'-0", head 7'-0"	2'-7" wide, sill 5'-0", head 7'-0"	2'-0" wide, sill 5'-0", head 7'-0"	4'-0" wide, sill 6'-0", head 9'-0"	6'-0" wide, sill 3'-0", head 7'-0"	2'-0" wide, sill 5'-0", head 7'-0"	5'-9.5" wide, sill 1'-0", head 8'-0"	2'-0" wide, sill 5'-0", head 7'-0"	2'-0" wide, sill 3'-0", head 7'-0"
Timber jali + glazed shutters, west of the bed head	Timber jali + glazed shutters, east of the bed head	High window on the west wall, glazed shutters + grille (on the y 8.5 axis over W01)	Frosted casement, top-hung vent (over the master bath window W02)	Glazed clerestory over the stair well, top-hung, under the main roof's 2 ft eave: the hot-air outlet of the stair chimney	Teak casement, glazed (6 ft, even north light for screens)	High jali vent on the y 19.5 axis, over the den's garden door	Timber jali screen between the stair well and the covered terrace (light and air for the stair), glazed shutters behind it for driving rain and a steel grille inside for security	Frosted casement, top-hung vent (centred on the shower)	Timber jali + glazed shutters (air for linen and stored things)

- The stair-well jali (W40) faces the covered terrace: light and air for the stair, no glass to clean.
- The terrace door (D36) off the landing is glazed teak, opening outward with a weather bar.
- Upper windows sit under the main roof's 2 ft eave; sunshades only on the south windows.

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)


Guntur, Andhra Pradesh

Plot 170' deep, 27' to 40' wide, road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).


Stage	Draft for professional review (duplex option)
Drawing	**Window details, first floor**
Sheet	**A-402**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

1 Plinth, DPC, floor and apron

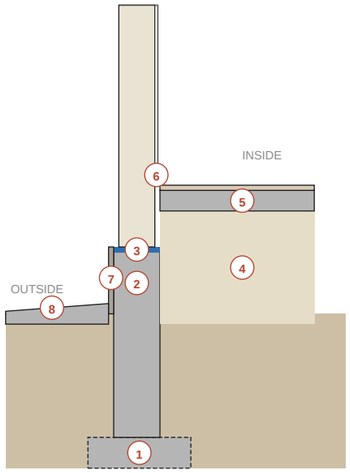


1 Footing by engineer after soil test; on black cotton soil often 1.5-2.5 m deep or under-reamed piles.
2 RCC plinth beam ties all columns; 75 mm sand cushion under it on expansive soil.
3 DPC 40 mm with waterproof compound at plinth top, under the first AAC course.
4 Moorum / gravel fill compacted in 150 mm layers; anti-termite treatment at each layer.
5 PCC bed 100 mm with polythene sheet, then screed and tile.
6 Skirting 4 in, flush with plaster face (plaster stops in a groove): no dust ledge.
7 Stone cladding on the plinth face to 2 ft: rain splash zone stays clean.
8 3 ft PCC apron sloping 1:30 away; polysulphide joint at the wall so water never reaches the foundation.

2 Flush skirting at floor-wall joint

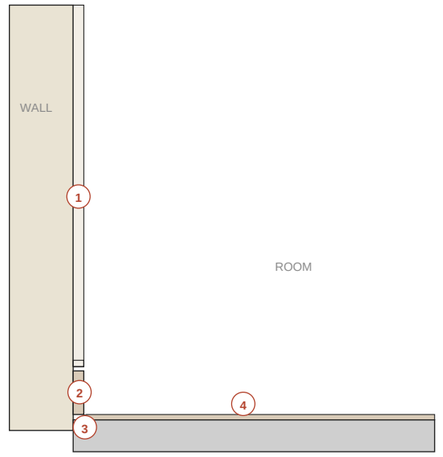


1 Plaster stops 1/4 in above skirting in a clean groove.
2 Skirting tile 4 in high set in the plaster line, face flush with the wall.
3 5 mm gap filled with silicone / PU sealant: allows movement, no cracked tiles.
4 In wet rooms use a cove tile or wall tile down to the floor with epoxy grout instead.

3 Window sill, frame and sunshade

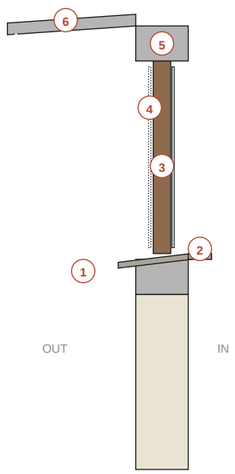

1 External sill slopes out 1:10 and projects 2 in past the plaster with a drip groove underneath.
2 Internal sill in stone, 1/2 in higher than the outer sill (water cannot run inward).
3 Frame on a bed of sealant; gap to wall filled with PU foam and sealed both sides.
4 Insect mesh on a separate openable frame.
5 RCC lintel band continuous around the house at door-head level.
6 Sunshade 1'-6" to 2'-0", top sloped out, drip groove under the front edge (no black streaks on walls).

4 Eaves, gutter and roof build-up

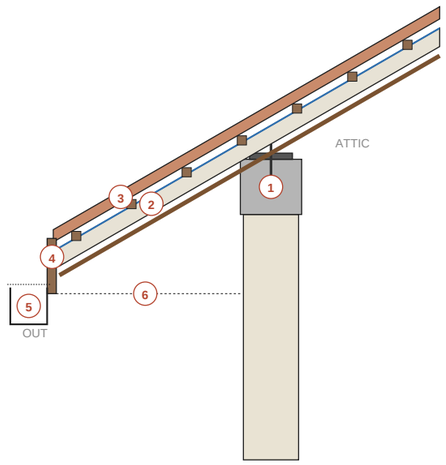

1 RCC ring beam with holding-down bolts cast in; truss shoe bolted, not just welded.
2 Cement-fibre deck + 50 mm insulation + breathable membrane under the battens.
3 Mangalore tiles; eave, verge, hip and ridge tiles clipped or screwed (cyclone wind).
4 Fascia board with drip edge flashing into the gutter.
5 150 mm gutter with leaf guard, falls 1:300 to downpipes.
6 Ventilated soffit with insect / bird mesh: hot attic air escapes at the ridge.


Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 170' deep, 27' to 40' wide, road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).


Stage	Draft for professional review (duplex option)
Drawing	**Typical details 1: plinth, floor, window, eaves**
Sheet	**A-501**
Scale	NTS
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

5 Bathroom: wet and dry zones

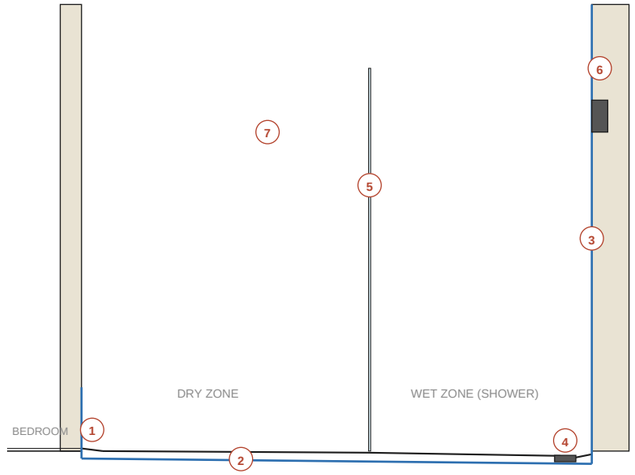


1 Bathroom 12 mm below the bedroom floor with a sloped granite threshold: no raised step to trip on.
2 Waterproof membrane across the floor and 12 in up all walls; 48 h flood test before tiling.
3 Shower walls waterproofed to 7 ft; tiles to ceiling in the shower, 7 ft elsewhere.
4 Linear drain at the far wall; only the wet zone falls (1:60). Dry zone stays dry and safe.
5 8 mm toughened glass partition, 6 in clear of the floor drain line; matt fittings hide hard-water marks.
6 Concealed diverter and pipes in the 7 in wet wall; isolation valve outside the bathroom.
7 Exhaust fan high on the outer wall, opposite the door, ducted outside (not into the attic).

6 Kitchen counter and chimney

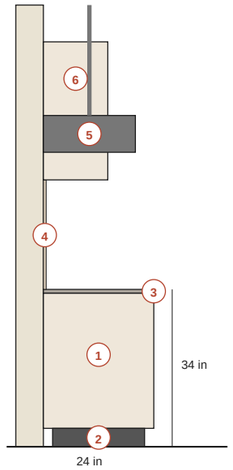


1 Counter top at 34 in (865 mm) for standing cooking; 30-31 in section for a chapati / grinding area.
2 Base units on 4 in legs or a granite plinth: floor can be mopped, no termites, no water damage.
3 20 mm granite (local Chimakurthy / Ongole) with a drip edge; sink under the window, hob on the east run.
4 Stone or tile between counter and wall cabinets, full height; no painted wall behind the hob.
5 Chimney 26-30 in above the hob, ducted straight out through the wall (no long bends).
6 Wall cabinets 14 in deep, starting 22-24 in above the counter; plenty of 16 A sockets at 42 in.

7 Hand-wash basin (serving counter)

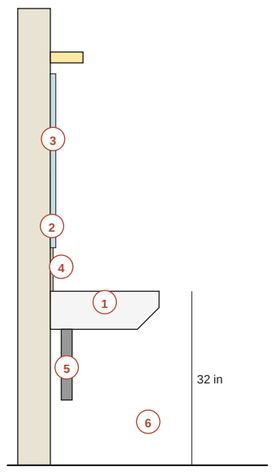


1 Wall-hung basin, rim at 32 in (810 mm); bottle trap, so the floor below can be cleaned.
2 Tiled or stone splash-back 2 ft above the basin: painted walls stain and peel here.
3 Mirror from 40 in to 72 in, light above (not behind) the mirror, socket at 42 in kept 2 ft from the tap.
4 Soap / shelf niche recessed into the wall, sloped forward so water does not pool.
5 Waste pipe into the wall, not across the floor; a floor trap is not needed for a dining-area basin.
6 Children: keep a fold-down step; tap with a long spout so water lands in the bowl, not on the counter.

8 AAC wall joints and chases

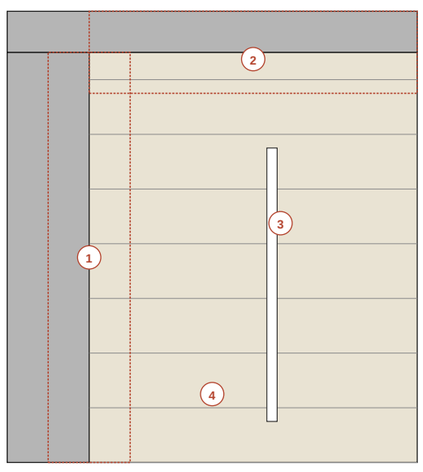

1 Galvanised mesh 150 mm wide, centred on every AAC-to-column and AAC-to-beam joint, before plaster.
2 Top course: 20 mm gap under the beam packed with PU foam / flexible filler, not rigid mortar.
3 Chases cut with a wall chaser, max 1/3 of block depth; refill with polymer mortar + mesh.
4 Thin-bed polymer mortar 3 mm, blocks laid dry; first course on the DPC in normal mortar to level.

9 Door thresholds and rain kerbs

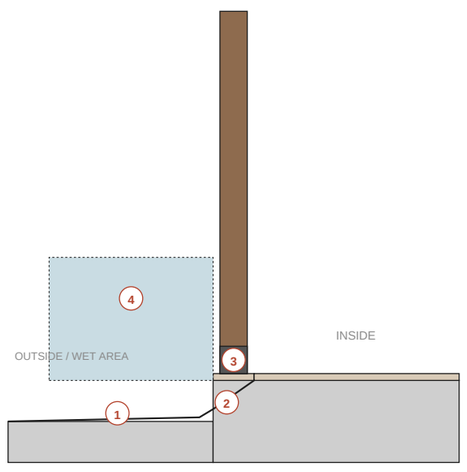

1 Outside floor 3-6 in lower than inside and sloping away 1:50: rain never flows in.
2 Granite threshold with a 1 in upstand / weather bar under external doors.
3 Wet-area door frames stand on a granite or WPC block; wood never touches a wet floor.
4 Open wet area: floor 3 in lower and sloping out to the walkway, so rain drains away from the kitchen door.

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 170' deep, 27' to 40' wide, road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Typical details 2: bath, kitchen, basin, AAC**
Sheet	**A-502**
Scale	NTS
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Room schedule

ID	Room	Centreline	Clear	Area sq ft (clear)
	Ground floor			
R01	Master bedroom	14'-0" x 12'-0"	13'-4" x 11'-5"	152
R40	Master bath	6'-6" x 8'-6"	5'-11" x 7'-10"	46
R42	Guest room / den	14'-0" x 10'-0"	13'-4" x 9'-5"	126
R08	Powder room	5'-0" x 7'-0"	4'-6" x 6'-5"	29
R20	TV bay	2'-6" x 7'-0"	2'-3.5" x 6'-5"	15
R05	Hall	6'-6" x 6'-6"	6'-0" x 5'-11"	36
R07	Guest bath	6'-6" x 7'-0"	5'-11" x 6'-4"	38
R09	Stair hall	7'-6" x 5'-8"	7'-6" x 5'-5.5"	41
R06	Stair	7'-6" x 9'-4"	7'-0" x 8'-11.5"	63
R19	Dining wash alcove	4'-0" x 4'-6"	3'-7" x 4'-1.5"	15
R13	Wet area	7'-0" x 4'-6"	6'-7" x 3'-10"	25
R10	Dining	11'-0" x 5'-0"	10'-7" x 4'-8.5"	50
R15	Kitchen	14'-0" x 9'-6"	13'-5" x 8'-9"	117
R16	Living	19'-0" x 12'-6"	18'-7.5" x 11'-9"	219
R11	Pooja	4'-0" x 4'-0"	3'-5" x 3'-5"	12
R18	Genkan (shoe-off foyer)	4'-0" x 8'-6"	3'-7.5" x 7'-11"	29
R17	Poomukham (verandah)	6'-0" x 12'-6"	5'-7.5" x 12'-1.5"	68
	First floor			
R31	Bedroom 2	14'-0" x 11'-0"	13'-5" x 10'-5"	140
R41	Stair head	7'-6" x 3'-8"	7'-1.5" x 3'-5.5"	25
R32	Box room	7'-6" x 9'-0"	6'-11" x 8'-5"	58
R33	Bedroom 2 bath	6'-6" x 7'-6"	6'-0" x 6'-10"	41
R34	Landing	6'-6" x 7'-6"	6'-1" x 6'-11"	42
R39	Upper toilet	6'-6" x 7'-0"	6'-1" x 6'-4"	39
R36	Study	14'-0" x 11'-0"	13'-5" x 10'-5"	140
R37	Covered terrace	19'-0" x 22'-0"	18'-7.5" x 22'-0"	410
	Total (clear, both floors)			1973

Door schedule (heights 7'-0"; vents 7'-6" to 9'-0")

ID	Location	Width	Type	Vent above
D01	Main entrance, 4 ft (on the entry axis y 18.75: gable, door, steps, path, tulsi and gate on one line)	4'-0"	Teak panelled, double leaf, jali panel above: the widest and tallest threshold in the house	Open jali
D02	Guest room / den (from the hall)	2'-3.5"	Flush, teak veneer	Closable jali
D04	Master bedroom (from the hall)	2'-6"	Flush, teak veneer	Closable jali
D45	Garden door from the den to the back garden sit-out (opens inward)	2'-6"	Teak frame, glazed upper half, steel grille shutter outside	-
D42	Master bath (from the bedroom into its dry zone, opens inward; the leaf screens the WC and shower)	2'-3.5"	Flush, waterproof (WPC/FRP)	Louvres
D43	Connecting door, master bedroom to the den, a pocket door (shut it and the den is a guest suite)	2'-3.5"	Teak veneer pocket door, acoustic seals	Closable jali
D08	Powder room (from the stair hall, opens inward; the first view is the window, the WC to the side at the far end)	2'-5"	Flush, waterproof (WPC/FRP), door closer	Louvres
D07	Guest bath (from the den, opens inward on lift-off hinges)	2'-3"	Flush, waterproof (WPC/FRP)	Louvres
D11	Pooja (north-east corner of the living)	2'-9.5"	Carved teak, double leaf (opens inward, clear of the living; faces west, family faces east)	Open jali
D12	Kitchen to wet area (sliding)	2'-6"	Steel or WPC sliding, lockable	-
D17	Kitchen entry from the living (sliding)	2'-6"	Teak frame, glazed sliding door, 2'-6" (closes off cooking smoke)	-
D18	Wet area service door to the south walkway (opens inward)	2'-6"	Steel, lockable, louvred top	-
D31	Bedroom 2 (from the landing)	2'-6"	Flush, teak veneer	Closable jali
D33	Bedroom 2 bath (from the bedroom, opens inward; the open leaf screens the WC)	2'-3.5"	Flush, waterproof (WPC/FRP)	Louvres
D37	Box room (from the stair head, opens inward)	2'-5"	Flush, teak veneer, louvred top	-
D35	Study (from the landing)	2'-7"	Teak frame, glazed upper panel (frosted), acoustic seals	Closable jali
D39	Upper toilet (from the	2'-5"	Flush, waterproof (WPC/FRP)	Louvres

Window and vent schedule (sill/head above floor)

ID	Room	Wall	Width	Sill	Head	Type
W01	Master bedroom	W	2'-7"	3'-0"	7'-0"	Timber jali + glazed shutters (west, on the y 8.5 axis under W36; shaded by the pergola and the chaipu)
W02	Master bath	S	2'-0"	5'-0"	7'-0"	Frosted casement, top-hung vent (2 ft bath window, centred under Bath 2's window above)
W04	Guest room / den	N	6'-0"	3'-0"	7'-0"	Teak casement, glazed (6 ft), fixed jali on the lower 2 ft (privacy from the neighbour 2 ft away), hood above
W05	Stair	S	4'-0"	6'-6"	9'-0"	Glazed casement over the half landing (sill 1'-6" above it, fixed lower pane), centred on the stair; the clerestory W33 stacks above it
W10	Stair	In	3'-7"	1'-0"	9'-3.5"	Timber jali screen between the stair and the dining, up to the slab (borrowed light, air into the stair chimney)
W11	Dining wash alcove	S	2'-7"	3'-0"	7'-0"	Timber jali + glazed shutters (2'-7" room window) centred on the alcove: daylight for the dining
W48	Master bedroom	S	2'-7"	3'-0"	7'-0"	Timber jali + glazed shutters, west of the bed head (stacked under W31)
W49	Master bedroom	S	2'-7"	3'-0"	7'-0"	Timber jali + glazed shutters, east of the bed head (stacked under W37)
W12	Wet area	S	2'-0"	5'-0"	7'-0"	Jali vent over the utility sink (2 ft vent window)
W07	Kitchen	S	6'-0"	3'-6"	7'-0"	Timber jali + glazed shutters (clear of the terrace post over x 61; the sink centred under it)
W08	Kitchen	E	1'-7"	6'-0"	8'-0"	High ventilator, jali + louvres above the counter (smoke and hot air out; the hob wall below stays solid)
W09	Living	N	6'-0"	3'-0"	7'-0"	Teak casement, glazed (6 ft), fixed jali on the lower 2 ft (privacy from the neighbour), hood above
W43	Guest bath	N	2'-0"	5'-0"	7'-0"	Frosted casement, top-hung vent
W51	Powder room	N	2'-0"	5'-0"	7'-0"	Frosted casement, top-hung vent
W44	Kitchen / dining	In	4'-2.5"	3'-0"	7'-0"	Serving hatch over a granite counter, glazed sliding shutters (close while cooking)
W17	Pooja	E	2'-9.5"	5'-6"	7'-0"	High vent to the poomukham, jali + mesh (lamp smoke out)
W50	Kitchen	S	6'-0"	7'-6"	9'-0"	High jali ventilator above the window W07 (hot air out under the ceiling)
W46	Genkan	E	2'-7"	4'-6"	7'-0"	Timber jali + glazed shutters over the shoe bench (light from the poomukham)
W47	Living	N	5'-6"	7'-6"	9'-0"	Glazed clerestory, top-hung: sky light above the neighbour's wall, hot air out under the slab
W31	Bedroom 2 (1st)	S	2'-7"	3'-0"	7'-0"	Timber jali + glazed shutters, west of the bed head
W37	Bedroom 2 (1st)	S	2'-7"	3'-0"	7'-0"	Timber jali + glazed shutters, east of the bed head
W36	Bedroom 2 (1st)	W	2'-7"	5'-0"	7'-0"	High window on the west wall, glazed shutters + grille (on the y 8.5 axis over W01)
W35	Bedroom 2 bath (1st)	S	2'-0"	5'-0"	7'-0"	Frosted casement, top-hung vent (over the master bath window W02)
W33	Stair (1st)	S	4'-0"	6'-0"	9'-0"	Glazed clerestory over the stair well, top-hung, under the main roof's 2 ft eave: the hot-air outlet of the stair chimney
W34	Study (1st)	N	6'-0"	3'-0"	7'-0"	Teak casement, glazed (6 ft, even north light for screens)
W41	Study (1st)	W	2'-0"	5'-0"	7'-0"	High jali vent on the y 19.5 axis, over the den's garden door
W40	Stair (1st)	In	5'-9.5"	1'-0"	8'-0"	Timber jali screen between the stair well and the covered terrace (light and air for the stair), glazed shutters behind it for driving rain and a steel grille inside for security
W42	Upper toilet (1st)	N	2'-0"	5'-0"	7'-0"	Frosted casement, top-hung vent (centred on the shower)
W45	Box room (1st)	N	2'-0"	3'-0"	7'-0"	Timber jali + glazed shutters (air for linen and stored things)
GV1	Roof	-	-	-	-	Teak-boarded gable face with a 4 ft timber jali panel centred over the main door: vents the roof space over the verandah

Finishes

Space	Floor	Walls / skirting	Ceiling
Living, dining	Red oxide (IPS) or polished Kota / Tandur stone	4 in flush skirting in floor stone; lime-finish or mineral paint	RCC slab soffit at 9'-5", plastered (the covered terrace above keeps it shaded)
Bedrooms, dressing	Matt vitrified 2x2 ft or red oxide	4 in flush skirting; putty + washable emulsion	Ground floor: RCC slab soffit at 9'-5", plastered; first floor: false ceiling at 9'-6", 50 mm insulation above
Pooja	White marble or teak	Teak panelling behind idol; 4 in marble skirting	Teak / board at 9'-6"
Kitchen	Anti-skid matt vitrified or Kota, mid-tone	Tile / stone full height between counter and wall cabinets	Moisture-resistant board at 9'-6", storage loft above
Master bath, guest bath, upper baths, powder room	Anti-skid ceramic (R11), falls 1:60 to drain	Tiles to 7 ft; full height in shower; waterproofing 12 in up all walls, 7 ft in shower	Moisture-resistant board / PVC at 8'-6"
Wet area	Rough Cuddapah / Kota stone, falls to drain	4 ft stone or tile dado	Board at 9'-6"
Stair	Granite or Kota treads with a rounded nosing and anti-slip grooves, 10 in treads, 7 in risers	Teak handrail at 3 ft on the open side, timber jali to the dining	Open to the roof
Hall, landing, passage	Red oxide or vitrified	4 in flush skirting; washable paint	Slab soffit / board
Covered terrace (first floor)	Terracotta anti-skid tile on a waterproofed slab, falls 1:80 to a drain	Teak jali parapets 3'-6" on the north and south sides (neighbours close by); an open railing on the road side (teak cap, MS or teak balusters); bamboo chiks on the south and east	Steel trusses and the tiled roof above, painted; galvanised steel posts at the terrace edge
Poomukham, steps	Flamed / leather-finish granite (not polished)	Granite skirting; plinth face clad 2 ft (splash zone)	Exposed rafters + board
Exterior	Plinth apron: PCC 3 ft wide sloped away	AAC + 20 mm plaster with waterproof additive; elastomeric paint	-

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 170' deep, 27' to 40' wide, road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).


Stage	Draft for professional review (duplex option)
Drawing	**Schedules**
Sheet	**A-601**
Scale	-
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 170' deep, 27' to 40' wide, road on east

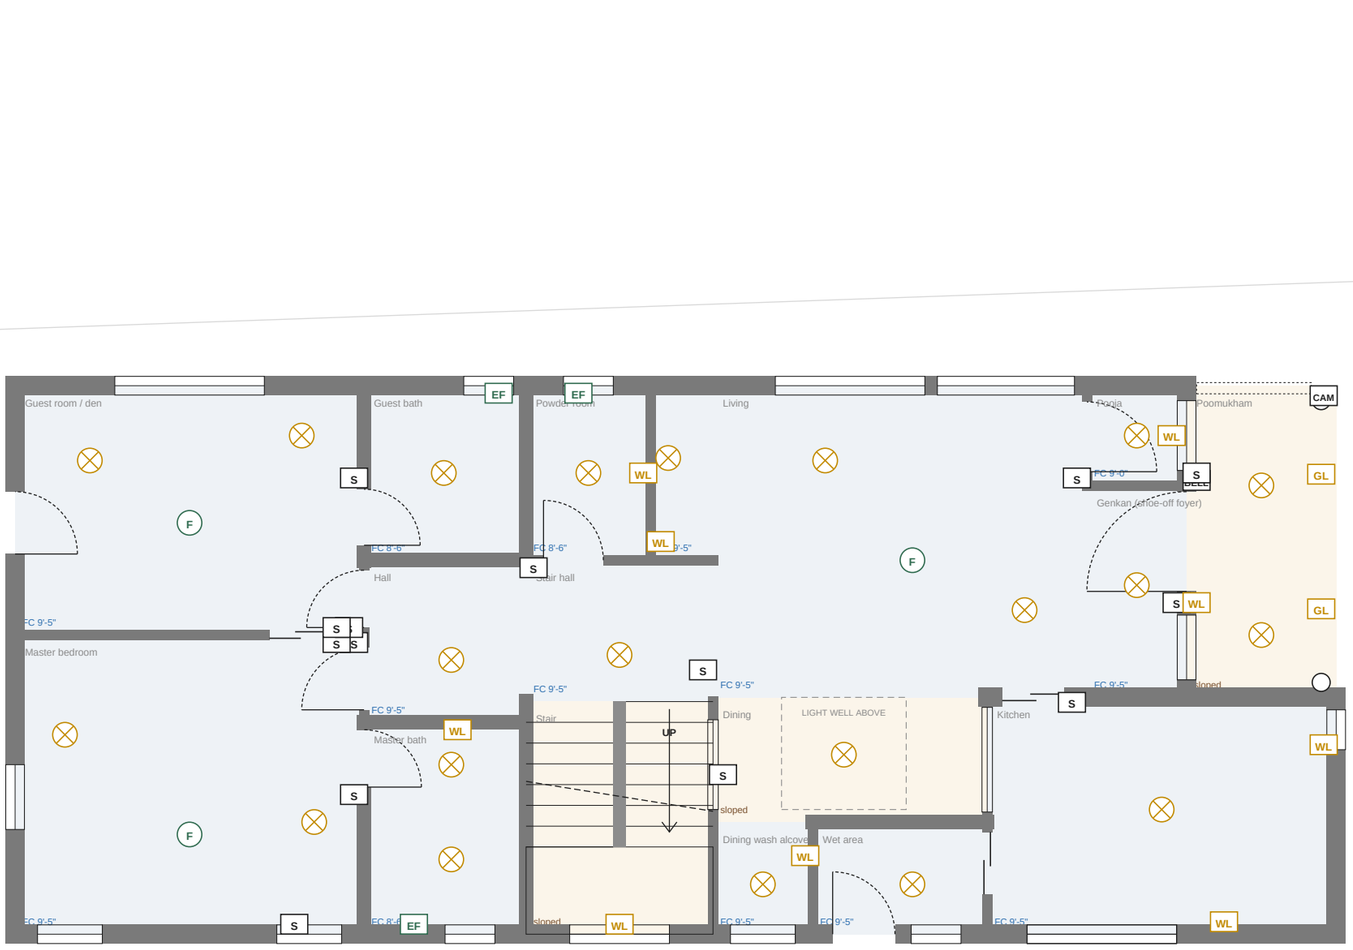

Lighting schedule

Code	Item	Height	No.
L	Ceiling light	ceiling	21
WL	Wall light / mirror light	6'-6"	9
F	Ceiling fan point	ceiling	3
EF	Exhaust fan	7'-0"	3
S	Switchboard	4'-0"	14
BELL	Bell push	4'-6"	1
CAM	CCTV point	8'-0"	1
GL	Outdoor / gate light	7'-0"	7

Lighting and ceiling notes

- Switchboards on the latch side of every door at 4 ft; 2-way switches at both bedroom beds and both ends of the hall.
- Bathroom switches outside the door; geyser switch with indicator lamp outside too.
- Fans at least 7 ft clear of the floor; long downrods in sloped ceilings; fan hooks cast or bolted, never in false ceiling board. Terrace fan and lights are wet-rated, hung from the steel trusses.
- Warm 2700-3000 K light in living and bedrooms, 4000 K in kitchen and offices; no downlights directly over the bed head.
- False ceilings (blue) with 50 mm insulation above; access panel near every light cluster and near AC pipe runs.
- Lights, fans, office sockets and router on the inverter circuit; outdoor lights on a timer or photocell.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).


Stage	Draft for professional review (duplex option)
Drawing	**Lighting, fans and ceilings, ground floor**
Sheet	**E-101**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 170' deep, 27' to 40' wide, road on east

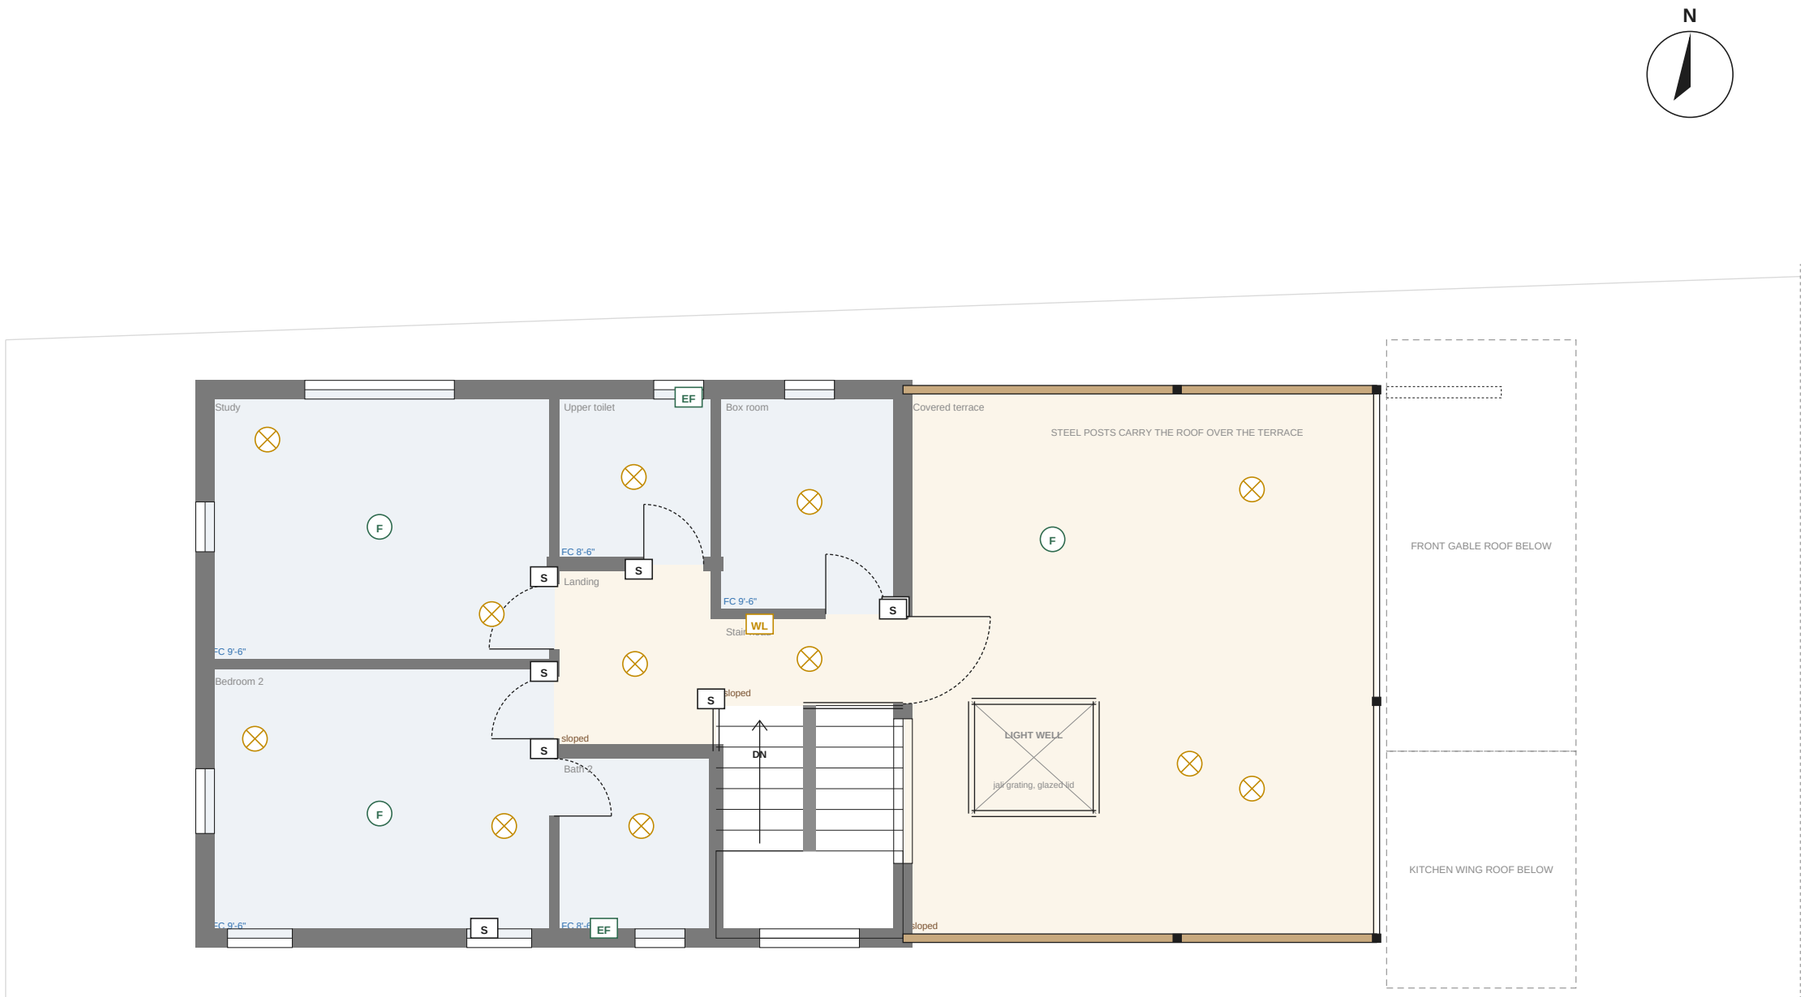

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Lighting schedule

Code	Item	Height	No.
L	Ceiling light	ceiling	12
WL	Wall light / mirror light	6'-6"	1
F	Ceiling fan point	ceiling	3
EF	Exhaust fan	7'-0"	2
S	Switchboard	4'-0"	8


Lighting and ceiling notes

- Switchboards on the latch side of every door at 4 ft; 2-way switches at both bedroom beds and both ends of the hall.
- Bathroom switches outside the door; geyser switch with indicator lamp outside too.
- Fans at least 7 ft clear of the floor; long downrods in sloped ceilings; fan hooks cast or bolted, never in false ceiling board. Terrace fan and lights are wet-rated, hung from the steel trusses.
- Warm 2700-3000 K light in living and bedrooms, 4000 K in kitchen and offices; no downlights directly over the bed head.
- False ceilings (blue) with 50 mm insulation above; access panel near every light cluster and near AC pipe runs.
- Lights, fans, office sockets and router on the inverter circuit; outdoor lights on a timer or photocell.

Stage	Draft for professional review (duplex option)
Drawing	**Lighting, fans and ceilings, first floor**
Sheet	**E-102**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 170' deep, 27' to 40' wide, road on east

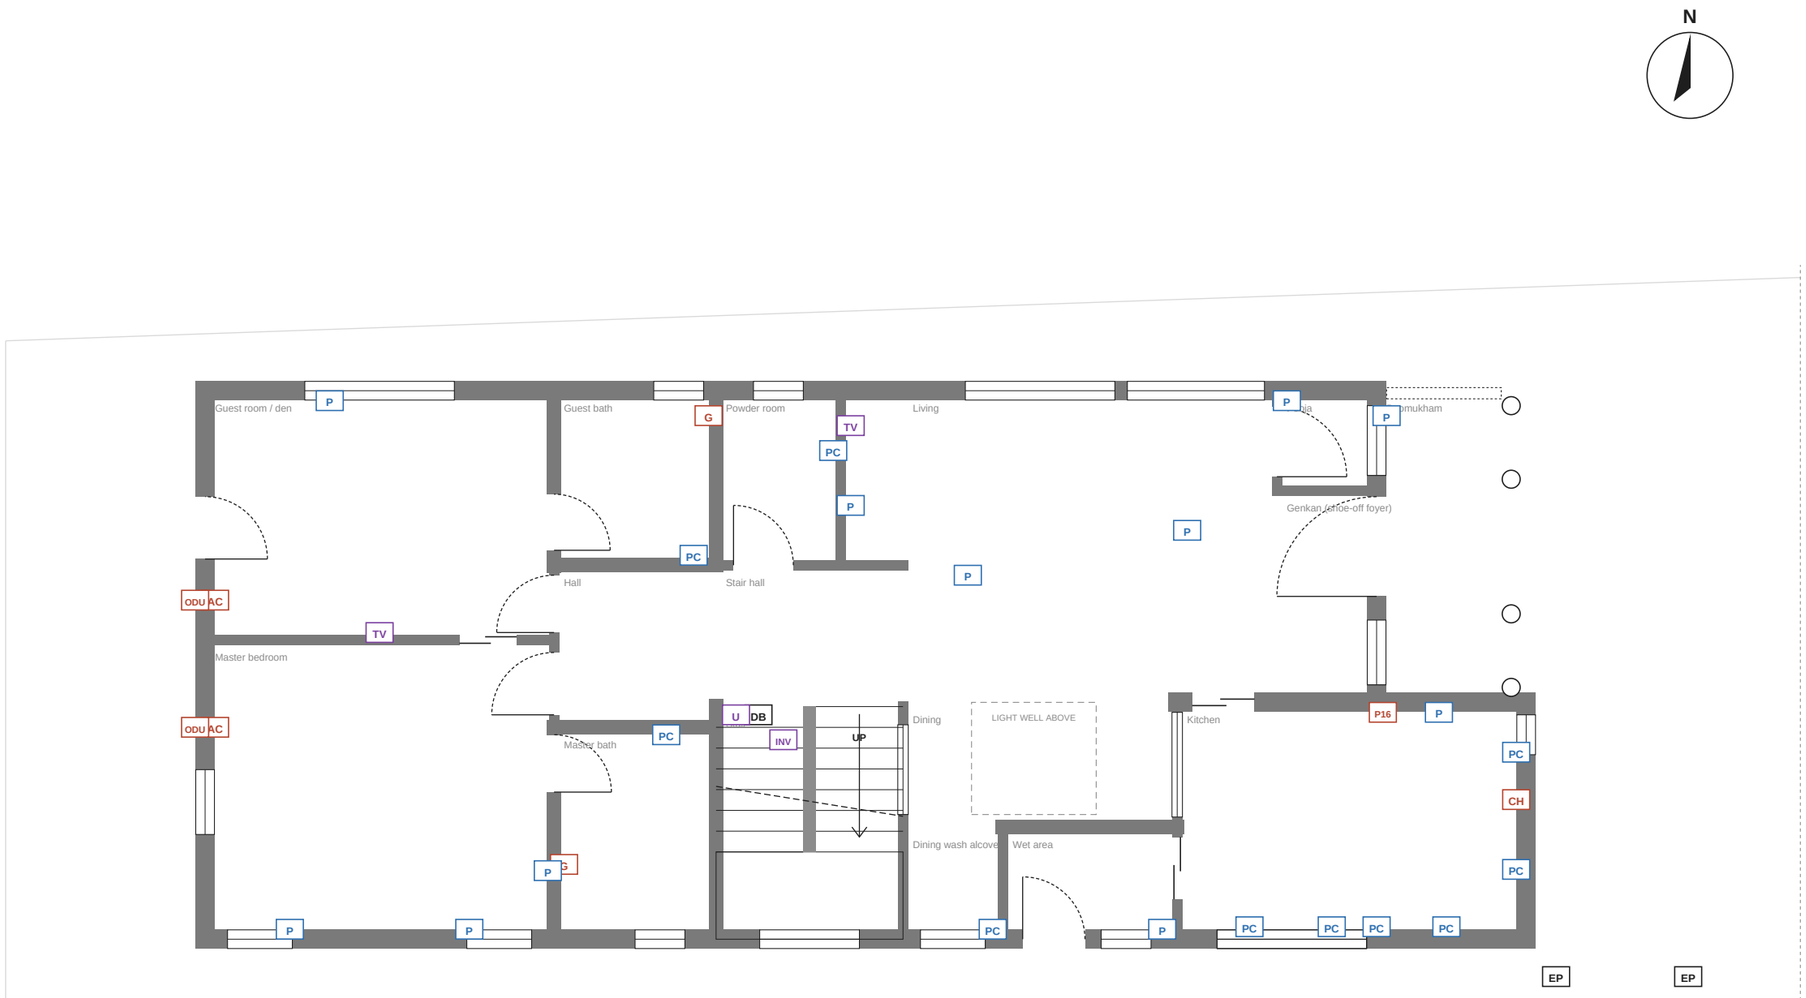

Power schedule


Code	Item	Height	No.
CH	Kitchen chimney point (16 A)	7'-0"	1
P	6 A socket	1'-0"	11
PC	6 A socket at counter	3'-6"	10
P16	16 A power socket	varies	1
U	Inverter (UPS) socket	1'-0"	1
TV	TV + data point	3'-6"	2
AC	AC indoor unit (16 A socket, sleeve, drain)	7'-6"	2
ODU	AC outdoor unit bracket	7'-0" outside	2
G	Geyser (16 A)	6'-6"	2
DB	Distribution board	5'-0" to top	2
INV	Inverter + battery	floor	1
MTR	Meter at gate	5'-0"	3
EP	Earth pit	ground	2

Power notes

- Separate MCB circuit for each AC, geyser, kitchen power, washing machine and pump; RCCB 30 mA on all socket circuits.
- AC: 16 A socket at 7'-6", 65 mm sleeve sloping out, drain pipe to a gully (not onto the wall); ODUs on shaded north / west walls on brackets.
- AC indoor units never above the bed head or desk chair: cold draught on the head is the common complaint.
- Study desks (two): UPS socket + data + 1 normal socket at desk height; Cat6 from the router to the TV and both desks; Wi-Fi access point on the landing for the first floor.
- Kitchen: 5-6 counter sockets at 42 in, 16 A for the fridge, chimney and microwave / OTG; none within 2 ft of the sink.
- DB in the under-stair cupboard off the stair hall (central, dry) with 25% spare ways and a sub-board for the first floor; meter at the gate; 2 earth pits; surge protector.
- Empty 25 mm conduits from the roof (solar PV), gate (CCTV, bell, intercom) and sump (pump controller) to the DB.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Power, AC and data, ground floor**
Sheet	**E-103**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

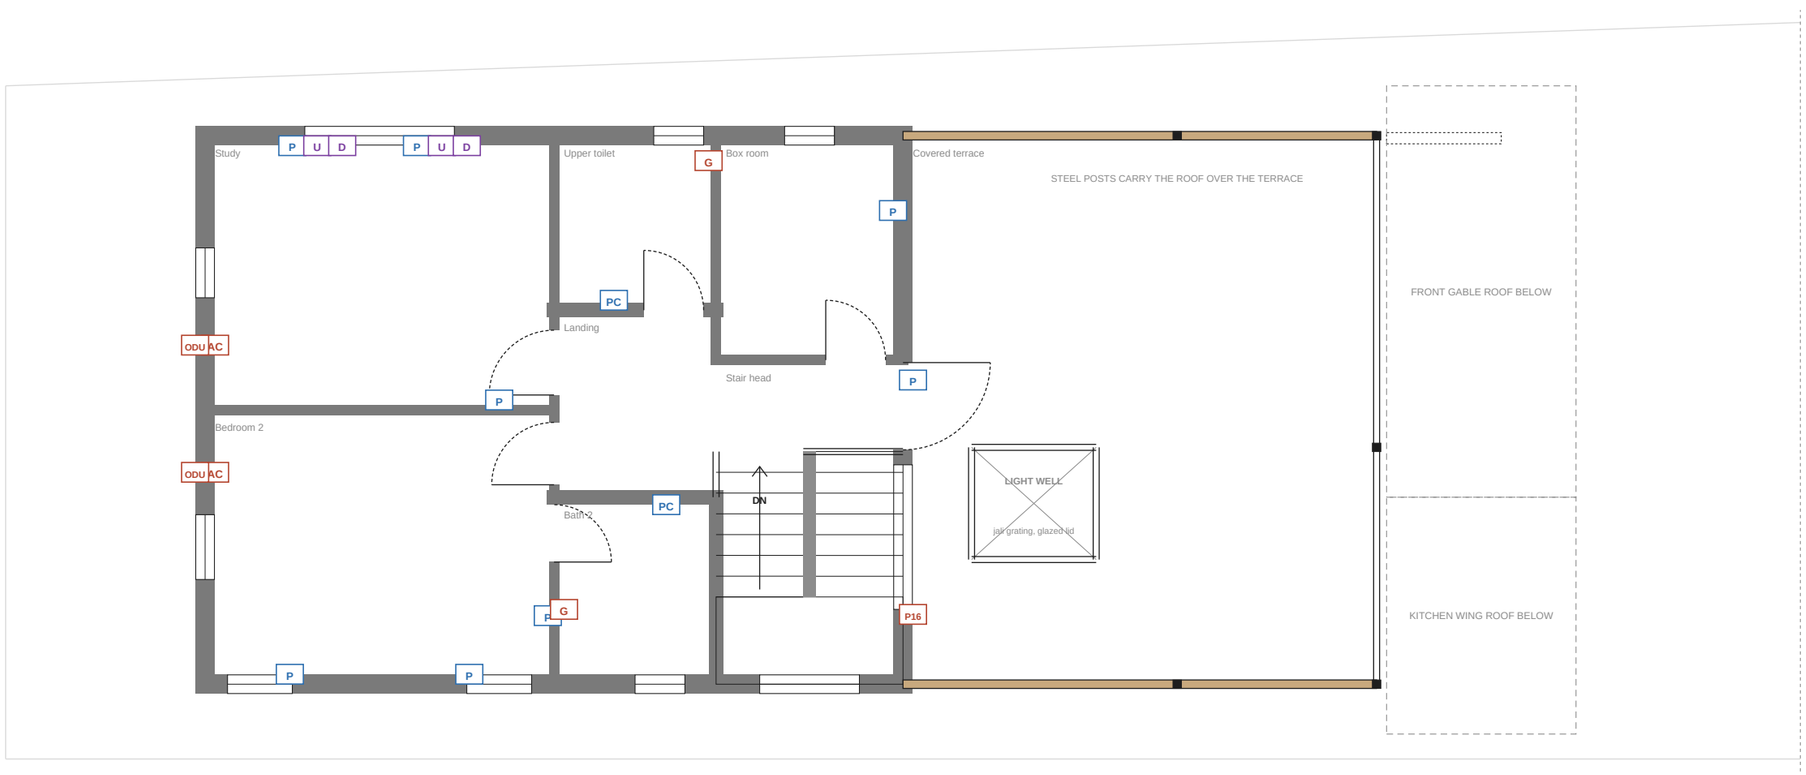

Power schedule

Code	Item	Height	No.
P	6 A socket	1'-0"	8
PC	6 A socket at counter	3'-6"	2
P16	16 A power socket	varies	1
U	Inverter (UPS) socket	1'-0"	2
D	Data point (Cat6)	1'-0"	2
AC	AC indoor unit (16 A socket, sleeve, drain)	7'-6"	2
ODU	AC outdoor unit bracket	7'-0" outside	2
G	Geyser (16 A)	6'-6"	2

Power notes

- Separate MCB circuit for each AC, geyser, kitchen power, washing machine and pump; RCCB 30 mA on all socket circuits.
- AC: 16 A socket at 7'-6", 65 mm sleeve sloping out, drain pipe to a gully (not onto the wall); ODUs on shaded north / west walls on brackets.
- AC indoor units never above the bed head or desk chair: cold draught on the head is the common complaint.
- Study desks (two): UPS socket + data + 1 normal socket at desk height; Cat6 from the router to the TV and both desks; Wi-Fi access point on the landing for the first floor.
- Kitchen: 5-6 counter sockets at 42 in, 16 A for the fridge, chimney and microwave / OTG; none within 2 ft of the sink.
- DB in the under-stair cupboard off the stair hall (central, dry) with 25% spare ways and a sub-board for the first floor; meter at the gate; 2 earth pits; surge protector.
- Empty 25 mm conduits from the roof (solar PV), gate (CCTV, bell, intercom) and sump (pump controller) to the DB.

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 170' deep, 27' to 40' wide, road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).


Stage	Draft for professional review (duplex option)
Drawing	**Power, AC and data, first floor**
Sheet	**E-104**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 170' deep, 27' to 40' wide, road on east

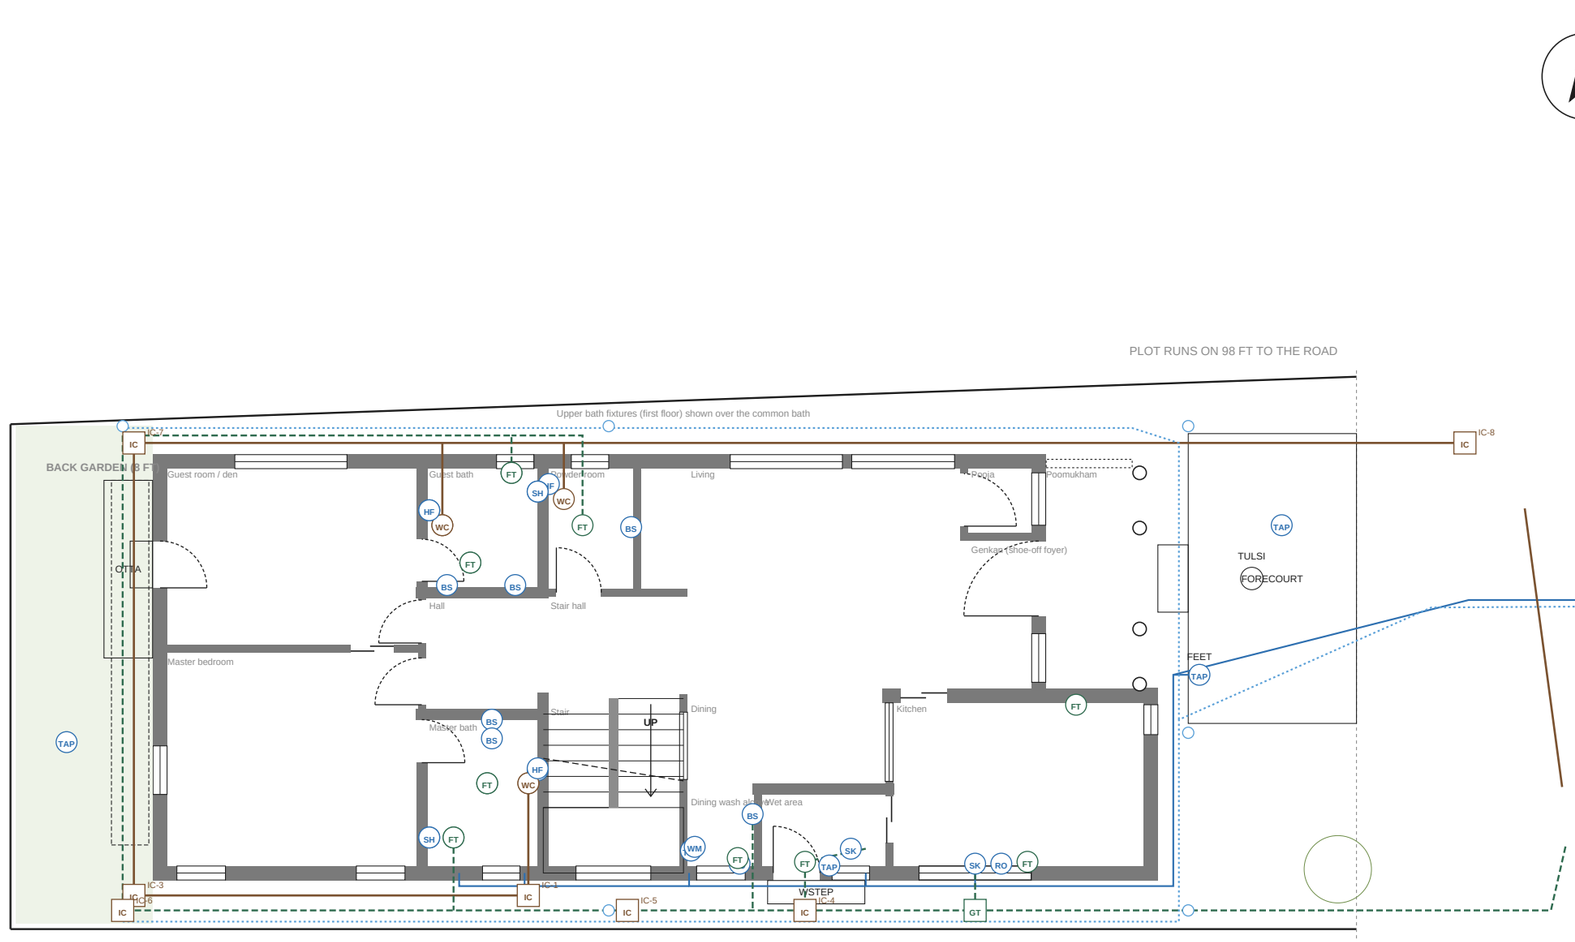

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

- Water supply (CPVC): sump pump to the loft tank, then down
- Soil line (uPVC 110 mm) to septic tank
- Grey water (uPVC 75 mm) to the soak pit
- Rainwater to sump filter, overflow to road

Fixtures and points

Code	Item	No.
WC	Wall-hung WC, concealed cistern	5
HF	Health faucet	5
BS	Wash basin	6
SH	Shower mixer (hot + cold)	4
FT	Floor trap / linear drain	13
SK	Sink	2
WM	Washing-machine inlet + drain	1
RO	RO purifier point	2
TAP	Tap	8
IC	Inspection chamber	7
GT	Grease trap	1

Plumbing notes

- Sump pump fills a 1,000 L loft tank over the upper bath; pressure pump for the showers; isolation valve for each bathroom and the kitchen, outside the room.
- Supply pipes run in wall chases or behind one service panel (no exposed pipes on the facades), never under the floor slab.
- Soil and grey water kept separate; inspection chamber at every bend and junction; 1:40 falls on 110 mm, 1:30 on 75 mm.
- Grease trap before the kitchen line joins anything; vent pipe from each WC stack above the eaves.
- Septic tank (sealed) and a lined soak pit in the spare rear land, behind the baths and about 15 ft from the house, far from the sump; if that land is ever sold, move them or switch to a bio-digester with treated outflow.
- Upper WC stack runs down inside the 7 in wet wall between the common bath and the store, with a vent pipe above the main roof eaves.
- Rain from both gutters to the sump through a first-flush filter; overflow to the road drain.
- Test the bore / supply water: RO for drinking, softener for bathrooms if hardness is high; matt or PVD fittings.

Stage	Draft for professional review (duplex option)
Drawing	**Water supply and drainage**
Sheet	**P-101**
Scale	1:100 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground