# Kerala Home, Phase 1

Pre-construction drawing set, Guntur, Andhra Pradesh (agricultural land: conversion to be confirmed)

## Sheet index


| | | |
|---|---|---|
| A-000 | Cover and sheet index | - |
| A-001 | Design basis and general notes | - |
| A-101 | Site plan and services | 1:100 |
| A-102 | Ground floor plan | 1:75 |
| A-103 | First floor plan | 1:75 |
| A-104 | Furniture layout, ground floor | 1:75 |
| A-105 | Furniture layout, first floor | 1:75 |
| A-106 | Working plan, ground floor: clear sizes and sections | 1:75 |
| A-107 | Working plan, first floor: clear sizes | 1:75 |
| A-108 | Floor finishes and levels, ground floor | 1:75 |
| A-109 | Floor finishes and levels, first floor | 1:75 |
| A-110 | Roof plan | 1:75 |
| A-201 | North and south elevations | 1:100 |
| A-202 | East and west elevations | 1:100 |
| A-301 | Sections A-A and B-B | 1:100 |
| A-401 | Door details and ground-floor windows | 1:75 |
| A-402 | Window details, first floor | 1:75 |
| A-501 | Typical details 1: plinth, floor, window, eaves | NTS |
| A-502 | Typical details 2: bath, kitchen, basin, AAC | NTS |
| A-601 | Schedules | - |
| E-101 | Lighting, fans and ceilings, ground floor | 1:75 |
| E-102 | Lighting, fans and ceilings, first floor | 1:75 |
| E-103 | Power, AC and data, ground floor | 1:75 |
| E-104 | Power, AC and data, first floor | 1:75 |
| P-101 | Water supply and drainage | 1:100 |


## Project data

| | |
|---|---|
| Site | Guntur, Andhra Pradesh; agricultural land (conversion to confirm) |
| Plot | 27' x 75' = 2,025 sq ft; duplex planned on the front 61' (back 14' spare) |
| Built footprint | 50' x 22' = 1,100 sq ft ground floor; about 505 sq ft enclosed + 375 sq ft covered terrace on the first floor |
| Carpet area | 1,826 sq ft clear, both floors, incl. poomukham and terrace |
| Construction | Two-storey RCC frame, AAC walls, first-floor slab over the back half, steel-truss roofs with clay tiles |
| Plinth | FFL +2'-0" above finished ground |

## Key design decisions

• Duplex option (branch feature/duplex): the house is planned on the front 61 ft of the plot (the back 14 ft stays spare land) as a 50 ft x 22 ft two-level house, 1,100 sq ft on the ground floor and about 505 sq ft enclosed on the first floor plus a 17 x 22 ft covered terrace.

• House lengthened from 44 to 50 ft (after review: rooms felt small): 2 ft to the bedrooms (both now 14 ft wide), 3 ft to the bath strip (master, common and upper baths about 6 x 6'-5" clear, dressing 6 ft wide, passage to the small bedroom 5'-6"), 1 ft to the dining, living and wet area. Front yard unchanged at 8 ft; the trial plot grows from 55 to 61 ft.No double height (changed after review): a slab covers the whole two-storey block, so the living, dining, kitchen, pooja, store and wet area all have flat ceilings at about 9'-5" and no dead space above the kitchen. Over the front half the first floor is a covered terrace, opening off the landing, with railings on three sides.

• Ground floor: master bedroom with its bath (south-west), small bedroom, common bath, lobby and a dog-leg stair seen from the living through a timber jali. First floor: upper master with a dressing room and bath, a landing, a passage and the covered terrace; the upper master has a sitting and study zone on the north side (the outdoor lounge was merged into it once the terrace was added).

• Roof: one hipped clay-tile roof over the two-storey block, carried on walls over the back rooms and on a light galvanised steel frame (posts and trusses) over the terrace, and a wide front gable (mukhappu) over the single-storey poomukham and kitchen front, so the house reads as a two-tier Kerala roof.

• No ridge ventilator (removed after review): with the terrace open on three sides, hot air under the main roof escapes at its open edges; the attic over the first-floor rooms is vented by meshed ridge and soffit vents.

• All four bath fittings stack in the south band (two baths over two); the septic tank and soak pit move to the spare rear land behind the baths, freeing the front yard; the water tank goes into the roof space (no tank stand).

• Site is in Guntur, Andhra Pradesh (farm land), not Kerala; Kerala style kept, construction adapted to local climate and soil.

• RCC frame with AAC block walls: 9 in outer, 5 in inner, 7 in where plumbing is concealed.

• Plinth 2 ft above finished ground; poomukham 6 in lower; bathrooms 12 mm lower with no raised threshold.

• AC provisions (points, sleeves, drain, outdoor-unit brackets) in both bedrooms, the office and living; passive cooling first.

• Flat insulated false ceilings in bedrooms, offices, baths and kitchen; sloped ceilings in living, dining and verandah.

• No glass skylight: the dining gets borrowed daylight from the living, the nook window and the hall; a louvred ventilator lantern above it lets hot air out (no glass, so no greenhouse heat).

• Service band on south (heat buffer); bedrooms and living get north light.

• Kitchen in SE; stove on east wall; open wet area onto the walkway; provisions in bench drawers, kitchen cabinets and lofts (no separate store).

• Bedroom doors widened to 3 ft; bathroom, office and store doors 2 ft 6 in.

• Thirty-second review: TV back on the west wall of the hall (Bedroom 2's east wall), sofa facing west about 7'-6" away in the dining bay, coffee table between, the window seat shortened to 4 ft as side seating; the dining space under the ventilator is open again.

• Thirty-first review (front facade): gate re-centred on the main door with a 6 ft stone forecourt and the tulsi thara on the axis (gate, tulsi, steps, door, hall, lamp niche in one line); charupadi seats with sloping backrests between the verandah pillars, flanking the steps; carved teak barge boards and a brass kalasham finial on the front gable; the kitchen front clad in exposed laterite with a deep projecting teak frame to its window; carved teak main door with brass studs, a stone surround and a nameplate niche; warm uplights at the pillars, a lantern by the door and gate-post lights; low hedges screening the sump and the two-wheeler bay; a pair of potted palms beside the steps.

• Thirtieth review (proportion clean-up): windows standardised to three sizes (6 ft rooms, 3 ft small, 2 ft baths) with every head at 7 ft and three sill levels (3 ft rooms, 3'-6" over counters, 5 ft baths); sunshades only on the sunny south, east and west walls (the eaves shade the north); floors cut to three families plus the verandah (red oxide in all public rooms and the pooja, vitrified in bedrooms, anti-skid ceramic in kitchen, baths and wet area, granite on the verandah); services hidden (pipes in chases, outdoor units grouped behind jali on the north wall), switchboards aligned, warm layered lighting, handle-less built-in fronts.

• Twenty-ninth review: compound wall made as thin as practical: precast RCC post-and-panel (2 in panels in 4 in posts) set just inside the plot line, so the side strips stay walkable and the north run can be lifted and moved if more land is bought.

• Twenty-eighth review: TV lounge reworked: sofa brought forward to about 8 ft from the TV, a 3 ft walk behind it, and a built-in window seat (charupadi-style enclave) under the dining-bay window, so the sofa backs onto a quiet

**Kerala Home, Phase 1**

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 27' x 75' (front 61' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Cover and sheet index** |
| Sheet | **A-000** |
| Scale | - |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

## Site conditions (Guntur)

• **Heat:** summer days 40-45 C (March-June). Insulated roof, ventilated attic, shaded west and south walls, AC provisions.

• **Rain:** about 850-1000 mm a year, mostly June-October, with short cyclonic downpours in Oct-Nov. Deep eaves, gutters, drip grooves.

• **Wind:** coastal cyclone belt. Trusses bolted down; every edge tile clipped; no light sheeting that can lift.

• **Soil:** black cotton (expansive) soil is common. A soil test decides the foundation; keep water and trees away from the walls.

• **Earthquake:** seismic zone III. RCC frame with lintel and ring bands.

• **Water:** groundwater is often hard with high fluoride. RO for drinking, softener if needed, matt fittings.

• **Termites and mosquitoes:** anti-termite treatment before the plinth; mesh on every opening.

• **Land:** agricultural land. Confirm conversion and the permission route before work starts.

## Levels and heights

| Level | Above finished ground |
|---|---|
| Finished ground (FGL) | +0'-0" |
| Poomukham floor | +1'-6" |
| Wet area floor | +1'-9" |
| House floor (FFL) | +2'-0" |
| Bathroom floors | +1'-11.5" (12 mm drop) |
| Door head / lintel band | +9'-0" |
| False ceilings (rooms) | +11'-6" |
| False ceilings (baths) | +10'-6" |
| Ground ring beam / first-floor slab | +12'-0" |
| First floor (finished) | +12'-0" |
| First-floor ring beam | +22'-0" |
| Front gable eaves / ridge | +11'-1" / +18'-7" |
| Main roof eaves (tile edge) | +20'-10" |
| Main ridge | +28'-4" |

## Wall types

| Type | Build-up | Where |
|---|---|---|
| EXT | 200 mm AAC + 20 mm external plaster + 12 mm internal plaster (~9 in) | Outer walls, kitchen north wall |
| WET | 150 mm AAC + plaster both faces (~7 in): concealed plumbing walls | Walls with concealed plumbing |
| INT | 100 mm AAC + plaster both faces (~5 in) | Other inner walls |

## General notes

• Dimensions are to wall centrelines unless marked 'clear'. Clear room sizes are on A-106 (ground) and A-107 (first floor).

• Concrete, steel, foundations and member sizes are by the structural engineer. Column positions are not shown and must be coordinated with the furniture layout.

• AAC: 150 mm galvanised mesh over every block-concrete joint; chases cut by machine; no hammering.

• All external sills, sunshades and copings get drip grooves; every external opening gets mosquito mesh.

• Wet rooms: waterproofing on floors, 12 in up the walls and 7 ft in showers; 48 h flood test before tiling.

• Skirting is flush with the plaster (no dust ledge). Grout in wet areas is epoxy.

• Pipes and conduits are laid before plaster and photographed with a tape measure in view, for future drilling.

• Keep 3 ft paved apron around the house, sloped away. No gardens, soak pits or big trees within 6-8 ft of walls.

• Two storeys: columns, footings, the first-floor slab and the stair are designed by the engineer for two floors; RCC column stubs at the terrace edge take the steel roof posts.

## Hold points (stop and inspect)

| Stage | Check before it is covered up | Who |
|---|---|---|
| Before design freeze | Soil test report, level survey of plot and road, water quality test (TDS, hardness, fluoride) | Owner, engineer |
| Excavation | Footing depth and bearing layer seen in the pit; no black soil left under footings | Structural engineer |
| Before each concrete pour | Reinforcement, cover blocks, laps and column positions checked; photos taken | Engineer / site supervisor |
| Plinth | Anti-termite treatment (certificate), fill compaction, DPC laid and cured | Supervisor |
| Before plaster | Conduits, pipes, AC sleeves, mesh over AAC joints; photos with a tape measure in view | Owner, supervisor |
| Wet rooms | Waterproofing coats, upturns, 48 h flood test passed before any tile is laid | Owner, plumber |
| Roof | Truss holding-down bolts, membrane and insulation, edge tiles clipped, flashing where the front gable meets the two-storey wall | Engineer, owner |
| Before handover | Water test on every floor slope and sill, plumbing pressure test, electrical insulation and earth test | Owner, MEP |

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh


Plot 27' x 75' (front 61' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Design basis and general notes** |
| Sheet | **A-001** |
| Scale | - |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 61' used), road on east

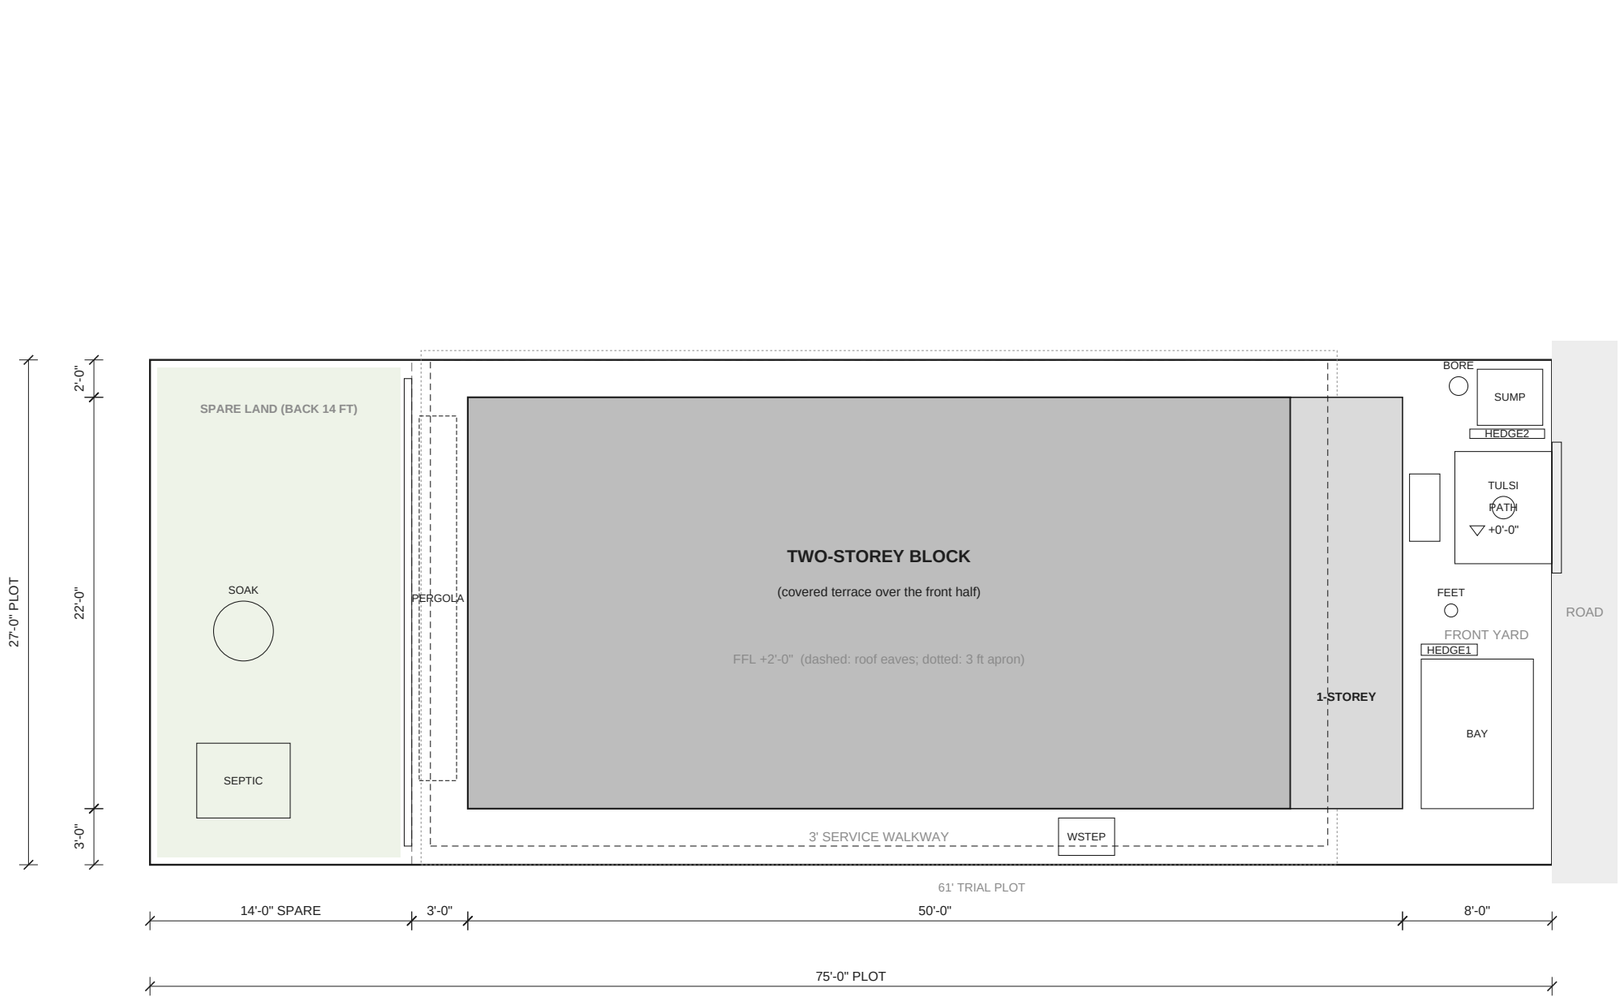


- SPARE: Spare land, back 14 ft (owner's): kitchen garden, clothes drying, septic tank and soak pit
- HEDGE3: Low hedge on the 61 ft line (the trial plot starts here)
- SEPTIC: Septic tank, 2 chambers, sealed RCC, in the spare land behind the baths, heavy-duty covers
- SOAK: Lined soak pit for septic effluent and grey water, in the spare land, about 10 ft from the house
- SUMP: Sump (NE)
- BORE: Borewell (if any), NE
- PERGOLA: Creeper pergola along the west wall (shades the master window; no big trees near walls)


- TULSI: Tulsi thara at the centre of the forecourt, on the door axis
- PATH: Stone-paved forecourt 6 ft wide on the door axis, gate to steps, around the tulsi thara
- HEDGE1: Low hedge screening the two-wheeler bay (access left open by the gate)
- HEDGE2: Low hedge screening the sump
- BAY: Two-wheeler bay (front yard now free of the septic tank)
- GATE: Gate 7 ft, centred on the main door
- STEPS: Entrance steps (3 risers), between the pillars, SS handrail one side
- FEET: Foot-wash tap + drain
- WSTEP: Steps from the wet-area service door down to the walkway (4 risers of about 5 in, along the wall)
- APRON: Plinth protection apron 3 ft, sloped away
- Site drains: finished ground falls 1:100 away from the house to the road side.
- Compound wall: precast RCC post-and-panel, 5 ft, set just inside the plot line; panels lift out, so a run can move later (including across the 61 ft line).

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Site plan and services** |
| Sheet | **A-101** |
| Scale | 1:100 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 61' used), road on east

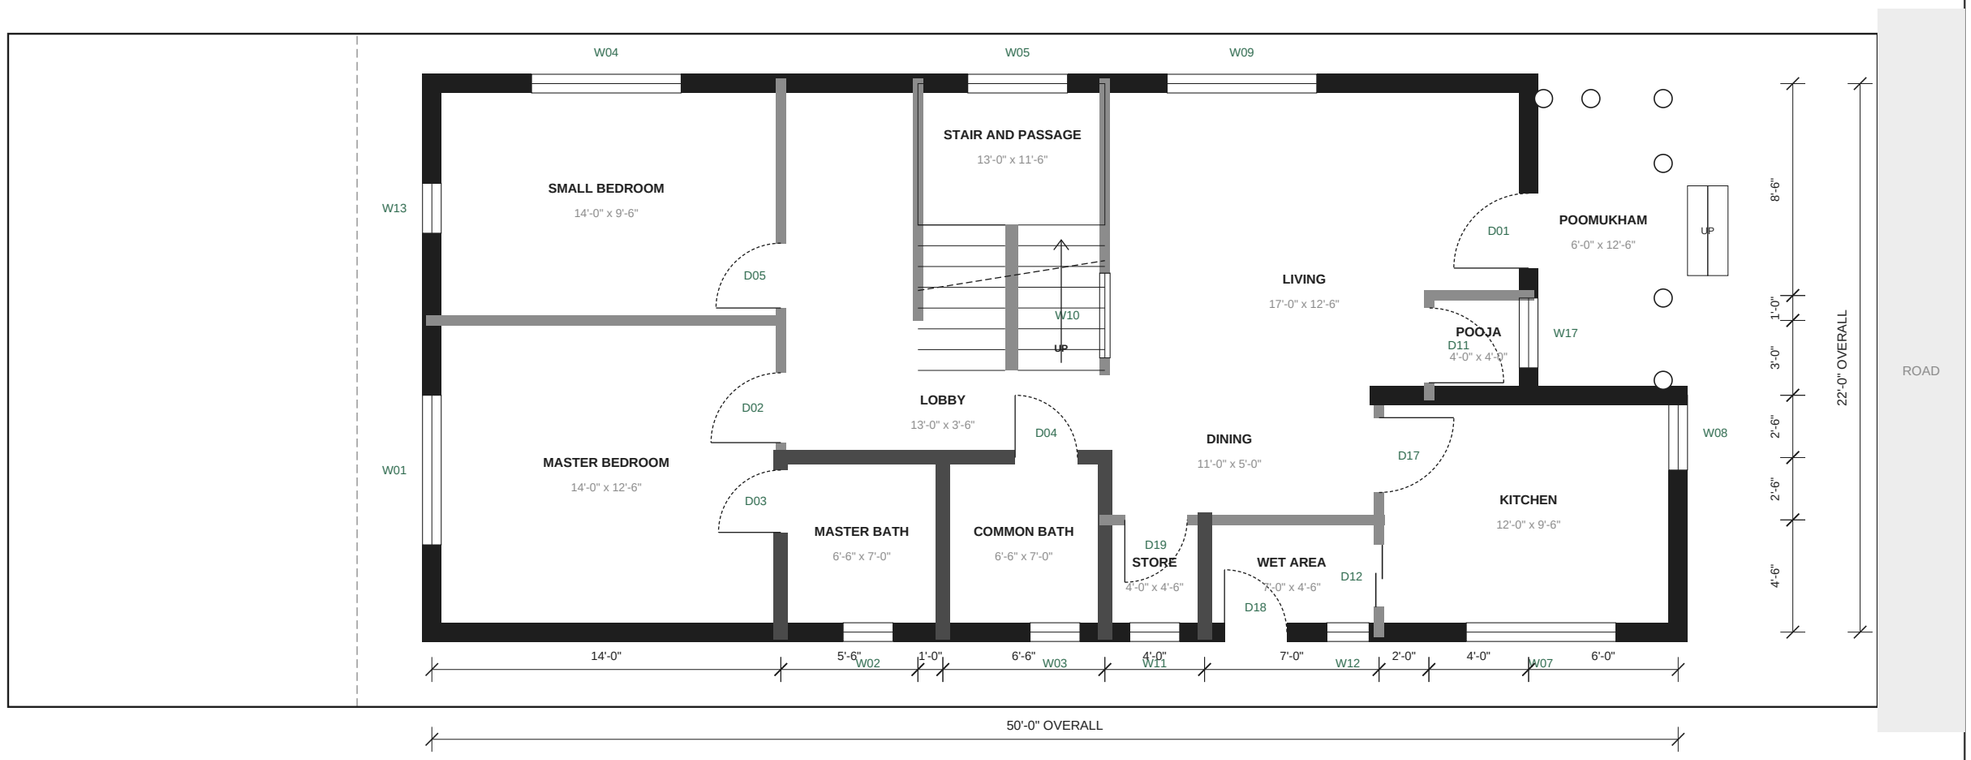


EXT: 200 mm AAC + 20 mm external plaster + 12 mm internal plaster (~9 in)
WET: 150 mm AAC + plaster both faces (~7 in): concealed plumbing walls
INT: 100 mm AAC + plaster both faces (~5 in)

0' 5' 10' 20' feet


Door swings dashed. D = door, W = window (A-401).
Section lines and clear sizes on A-106; levels on A-108.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Ground floor plan** |
| Sheet | **A-102** |
| Scale | 1:75 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 61' used), road on east

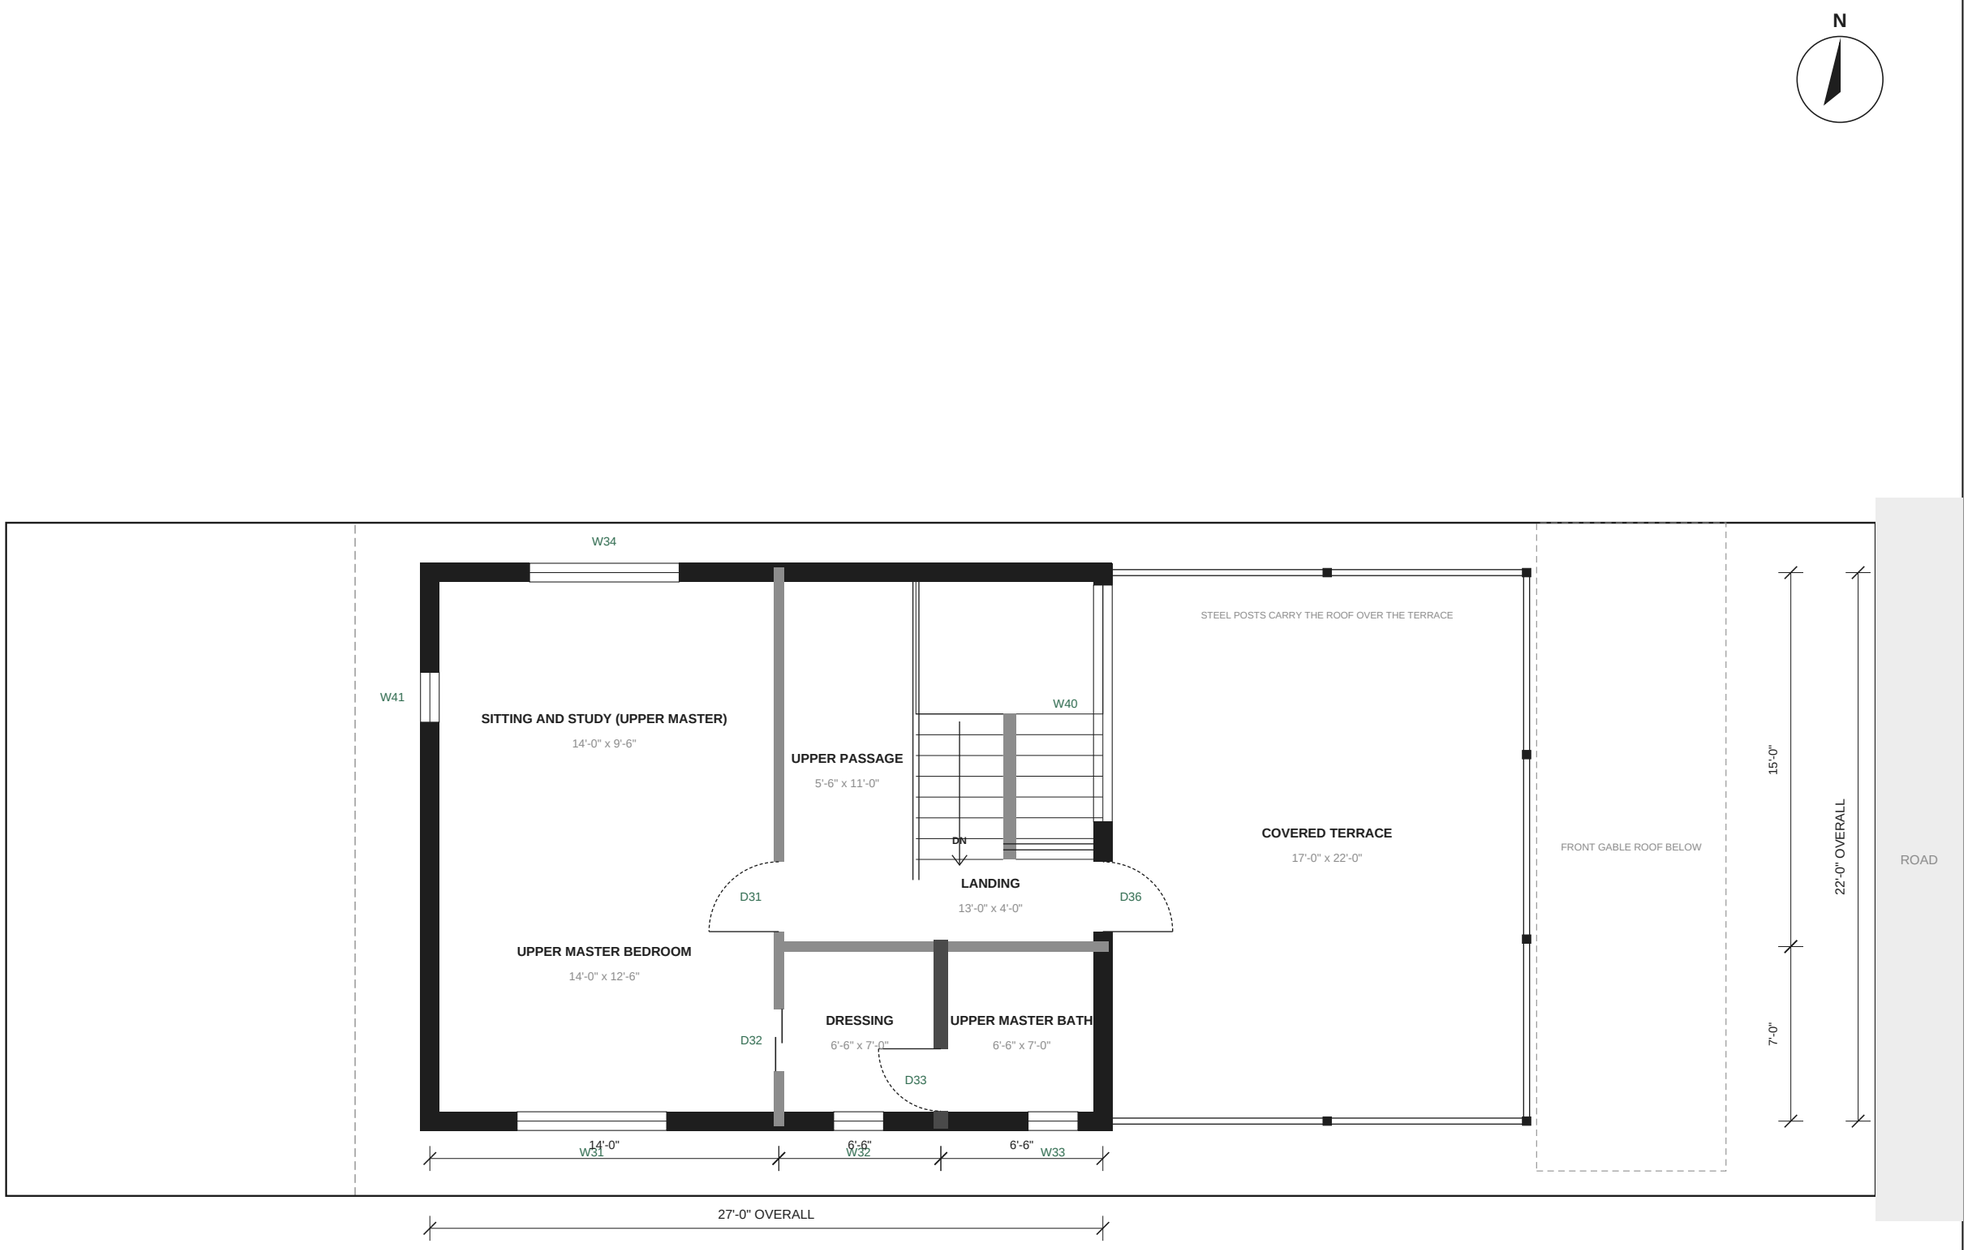


EXT: 200 mm AAC + 20 mm external plaster + 12 mm internal plaster (~9 in)
WET: 150 mm AAC + plaster both faces (~7 in): concealed plumbing walls
INT: 100 mm AAC + plaster both faces (~5 in)

0' 5' 10' 20' feet

Door swings dashed. D = door, W = window (A-401).
First floor at +12'-0". Railings 3'-6" high (double lines). The front half is a covered terrace under the main roof, on steel posts.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).


| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **First floor plan** |
| Sheet | **A-103** |
| Scale | 1:75 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 27' x 75' (front 61' used), road on east

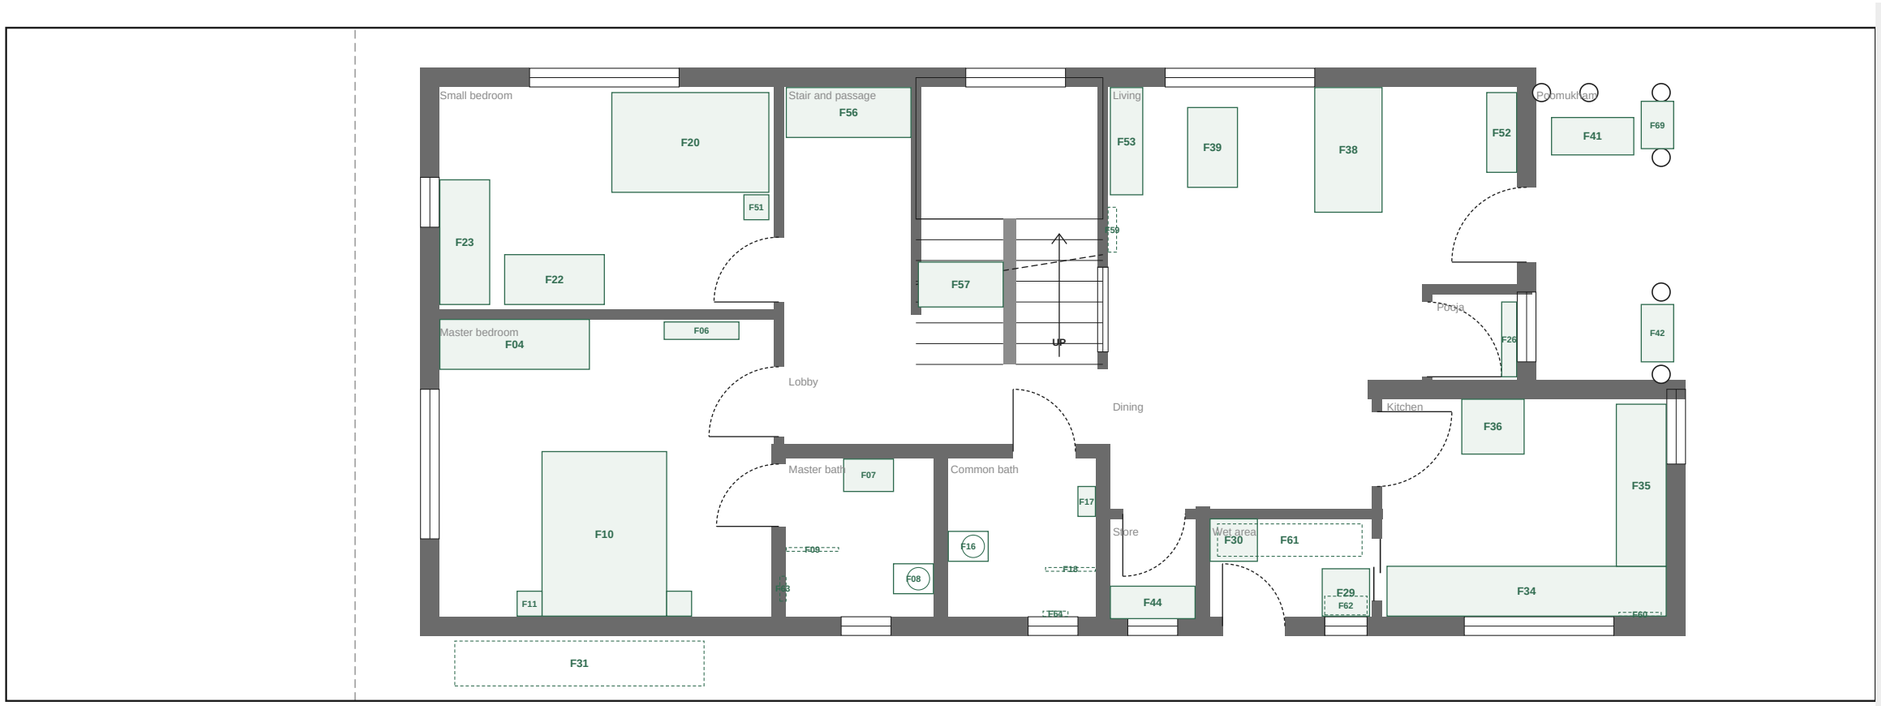


0’ 5’ 10’ 20’ feet

## Furniture key (full specs in schedules)


| | |
|---|---|
| **F10** | Queen bed 5' x 6'6" + headboard, head to the south wall |
| **F11** | Floating bedside shelf with a drawer, reading light and charging point above (x2) |
| **F04** | Built-in wardrobe 6', north wall, sliding doors, lofts above |
| **F06** | Dresser with mirror |
| **F07** | Vanity basin counter 2' with a mirror cabinet above |
| **F08** | WC |
| **F09** | Shower glass partition |
| **F63** | Recessed shower niche 1' x 1'-7" x 3 in deep, tiled, sloped sill |
| **F16** | WC |
| **F17** | Wash basin with a mirror cabinet above |
| **F18** | Shower glass partition |
| **F64** | Recessed shower niche 1' x 1'-7" x 3 in deep, tiled, sloped sill |
| **F20** | Double bed 4' x 6'-3" + headboard, head to the east wall |
| **F51** | Floating bedside shelf with a drawer, reading light and charging point above |
| **F23** | Built-in wardrobe 5' with a mirror door |
| **F22** | Study table 4' x 2' |
| **F57** | Under-stair cupboard where the stair drops below 7 ft |
| **F56** | Linen cupboard at the end of the passage, loft above |
| **F44** | Racks, full height |
| **F29** | Utility sink counter on the south wall, where vessels are washed |
| **F62** | Dish-drying rack over the utility sink |
| **F30** | Washing machine bay 2' x 2' |
| **F61** | Ceiling clothes airer on pulleys |
| **F31** | Fold-away clothesline in the south walkway behind the master |
| **F34** | L-counter, south run |
| **F60** | Utensil rail with hooks beside the hob |
| **F35** | L-counter, east run |
| **F36** | Refrigerator space on the north wall, clear of the entry door |
| **F53** | TV unit 4'-3" on the stair wall |
| **F38** | Sofa 5' |
| **F39** | Coffee table 3'2" x 2' |
| **F59** | Vilakku madam |
| **F52** | Shoe bench 3'-3" |
| **F26** | Pooja mandapam on the east wall |
| **F41** | Oonjal |
| **F42** | Charupadi |
| **F69** | Charupadi |

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Furniture layout, ground floor** |
| Sheet | **A-104** |
| Scale | 1:75 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 61' used), road on east

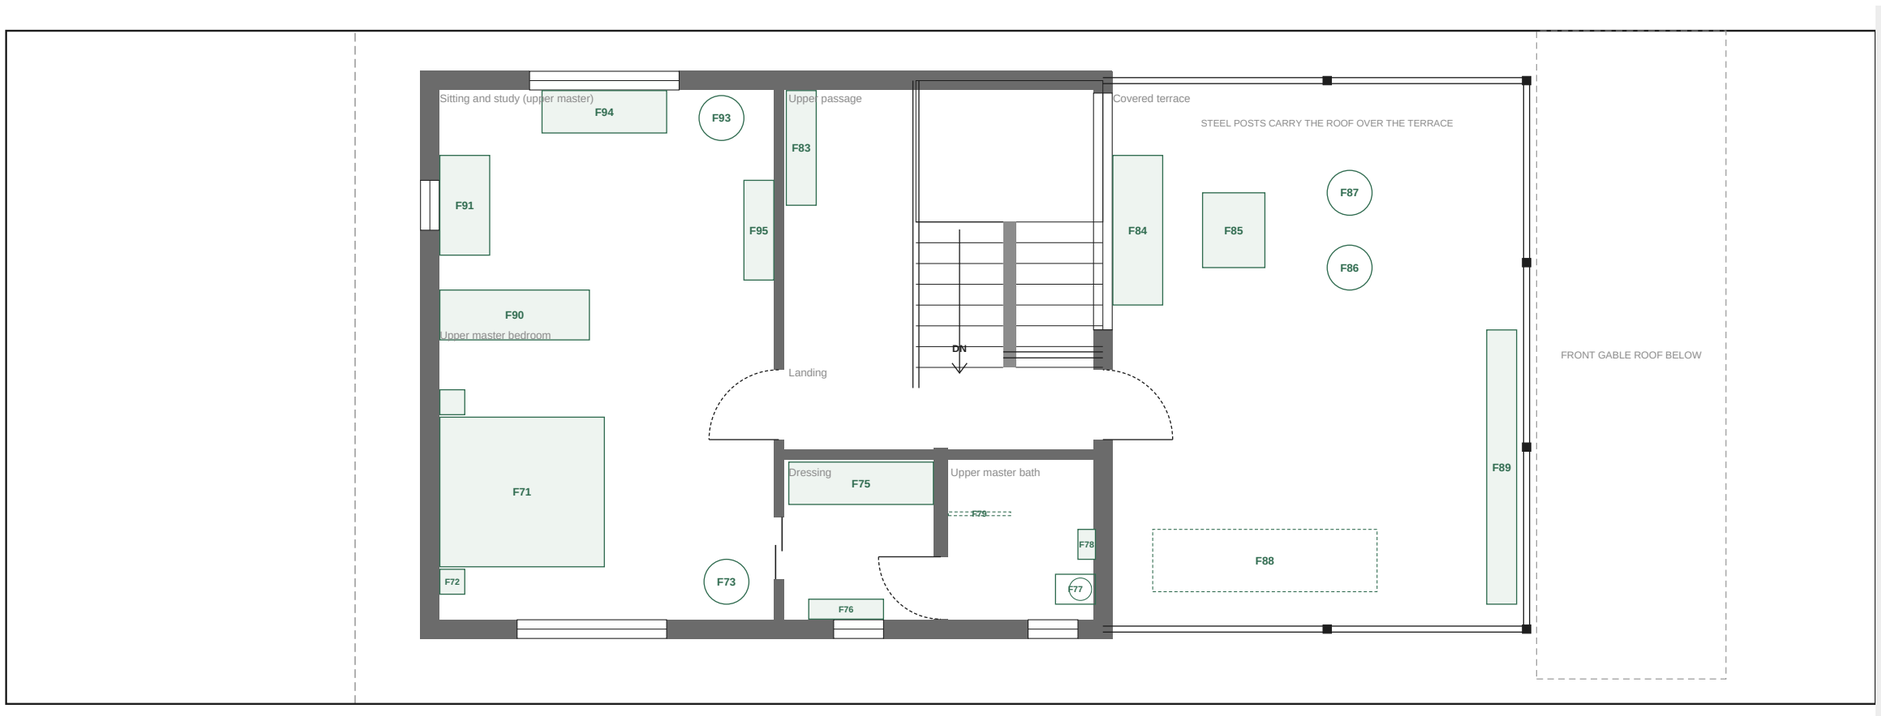



## Furniture key (full specs in schedules)

| | | | | | |
|---|---|---|---|---|---|
| **F71** | King bed 6' x 6'6" + headboard, head to the west wall | **F79** | Shower glass partition | **F84** | Built-in diwan 6' against the stair wall |
| **F72** | Floating bedside shelf with a drawer, reading light and charging point above (x2) | **F90** | Built-in wardrobe 6' as a part divider between the sleeping and sitting zones, lofts above | **F85** | Low coffee table |
| **F73** | Reading chair by the south window | **F91** | Work desk 4' x 2' on the west wall | **F86** | Cane armchair |
| **F75** | Built-in wardrobes 5'-10", full height, lofts above | **F94** | Window diwan 5' under the north window, drawers below | **F87** | Cane armchair |
| **F76** | Dresser with drawers | **F93** | Reading chair | **F88** | Clothes-drying rails hung from the steel frame |
| **F77** | WC | **F95** | Open bookshelf on the passage wall | **F89** | Planter boxes along the east railing |
| **F78** | Wash basin with a mirror cabinet above | **F83** | Open bookshelf at the end of the passage | | |

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Furniture layout, first floor** |
| Sheet | **A-105** |
| Scale | 1:75 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

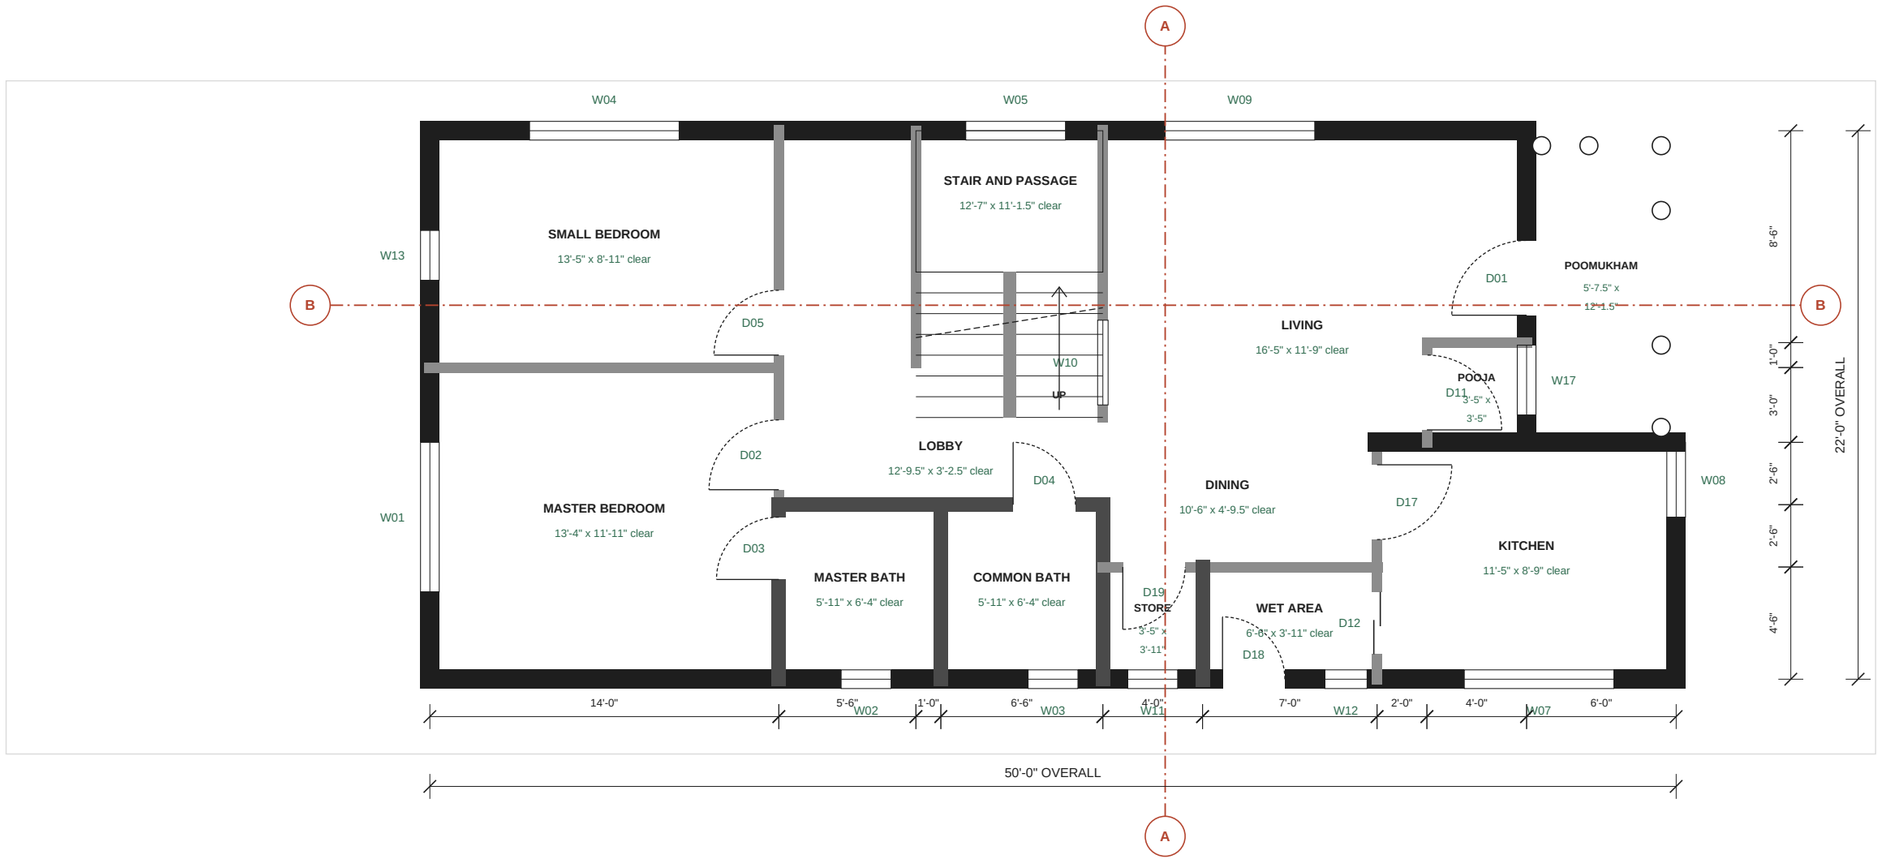


Clear sizes are wall face to wall face after plaster (green). Grid dimensions are to wall centrelines.

Sections A-A and B-B on A-301 (marked on the ground floor). Check every furniture item against the clear size before ordering.

Column positions (by engineer) must avoid door swings, wardrobes and the TV wall.

# Kerala Home, Phase 1


Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 27' x 75' (front 61' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Working plan, ground floor: clear sizes and sections** |
| Sheet | **A-106** |
| Scale | 1:75 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

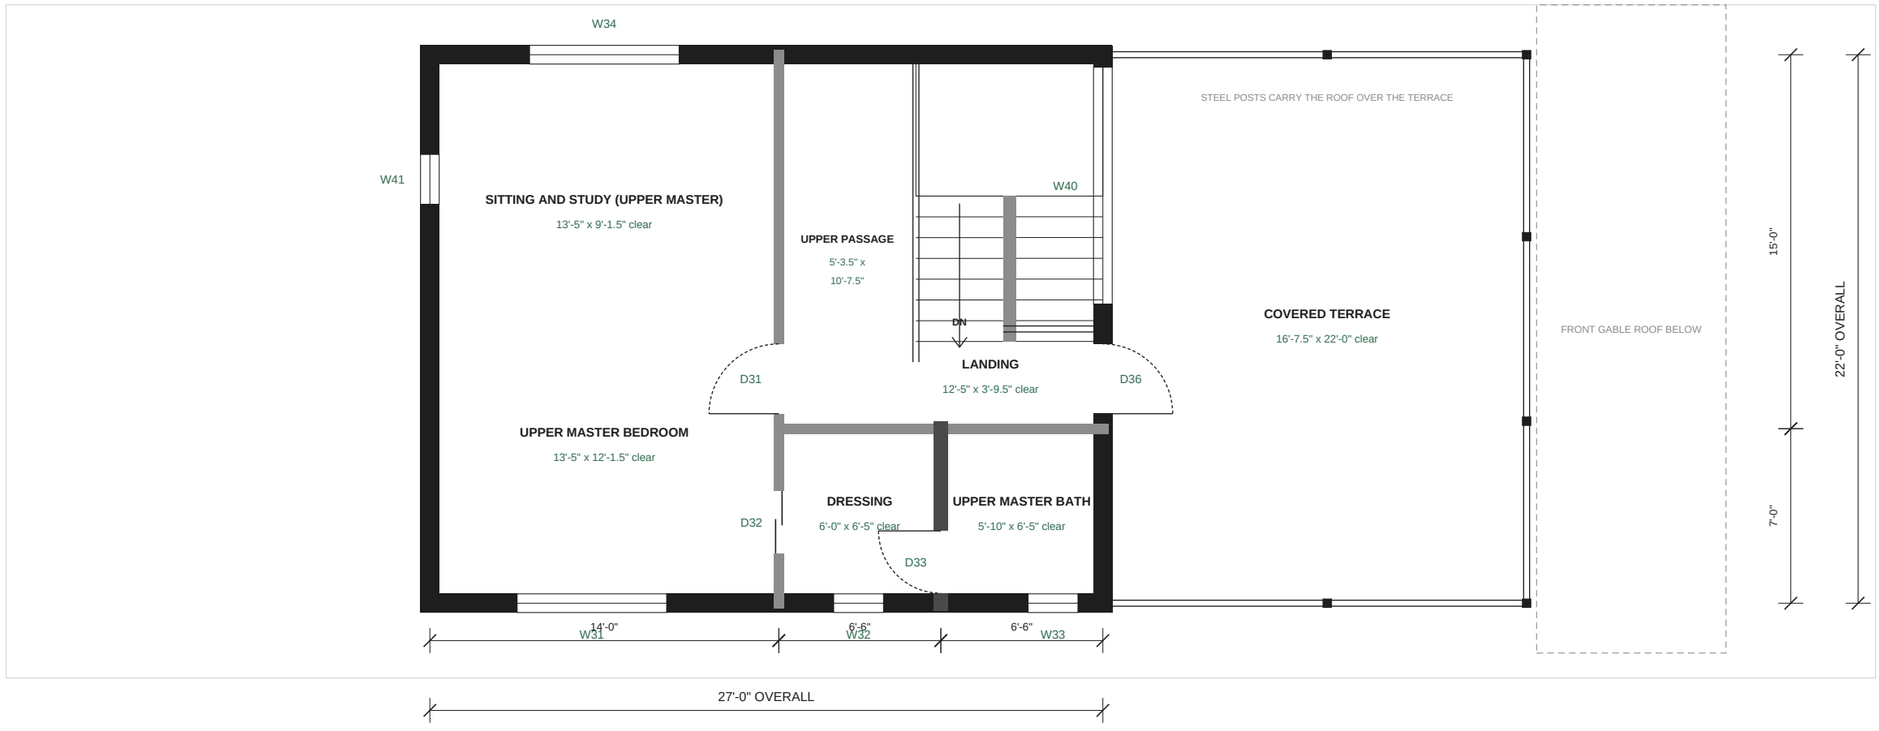


Clear sizes are wall face to wall face after plaster (green). Grid dimensions are to wall centrelines.

Sections A-A and B-B on A-301 (marked on the ground floor). Check every furniture item against the clear size before ordering.

Column positions (by engineer) must avoid door swings, wardrobes and the TV wall.

0' 5' 10' 20' feet

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 27' x 75' (front 61' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Working plan, first floor: clear sizes** |
| Sheet | **A-107** |
| Scale | 1:75 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 61' used), road on east

N




Red oxide / Kota stone
Matt vitrified 2x2
Anti-skid ceramic, waterproofed
Flamed granite
Terracotta anti-skid tile, waterproofed

## Floor detailing

- Skirting 4 in high, set flush with the plaster face (plaster stops in a groove above it), so no ledge collects dust.
- Bathrooms 12 mm below the bedroom floor with a sloped granite threshold: no raised step to trip on, water stays in.
- First floor: the upper bath and the covered terrace sit on the slab over ground-floor rooms: waterproof, flood-test 48 h, then tile.
- Shower zone: linear drain at the far end, floor falls 1:60 only inside the wet zone; dry zone floor nearly flat.
- Poomukham and steps: flamed or leather-finish stone. Polished granite is slippery when wet.
- Kitchen: mid-tone matt floor; white glossy tile shows every stain and is slippery with oil.
- Leave 5 mm expansion gaps at walls under the skirting and every 15-20 ft in large floors.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Floor finishes and levels, ground floor** |
| Sheet | **A-108** |
| Scale | 1:75 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 61' used), road on east




Red oxide / Kota stone
Matt vitrified 2x2
Anti-skid ceramic, waterproofed
Flamed granite
Terracotta anti-skid tile, waterproofed

## Floor detailing


- Skirting 4 in high, set flush with the plaster face (plaster stops in a groove above it), so no ledge collects dust.
- Bathrooms 12 mm below the bedroom floor with a sloped granite threshold: no raised step to trip on, water stays in.
- First floor: the upper bath and the covered terrace sit on the slab over ground-floor rooms: waterproof, flood-test 48 h, then tile.
- Shower zone: linear drain at the far end, floor falls 1:60 only inside the wet zone; dry zone floor nearly flat.
- Poomukham and steps: flamed or leather-finish stone. Polished granite is slippery when wet.
- Kitchen: mid-tone matt floor; white glossy tile shows every stain and is slippery with oil.
- Leave 5 mm expansion gaps at walls under the skirting and every 15-20 ft in large floors.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Floor finishes and levels, first floor** |
| Sheet | **A-109** |
| Scale | 1:75 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 61' used), road on east

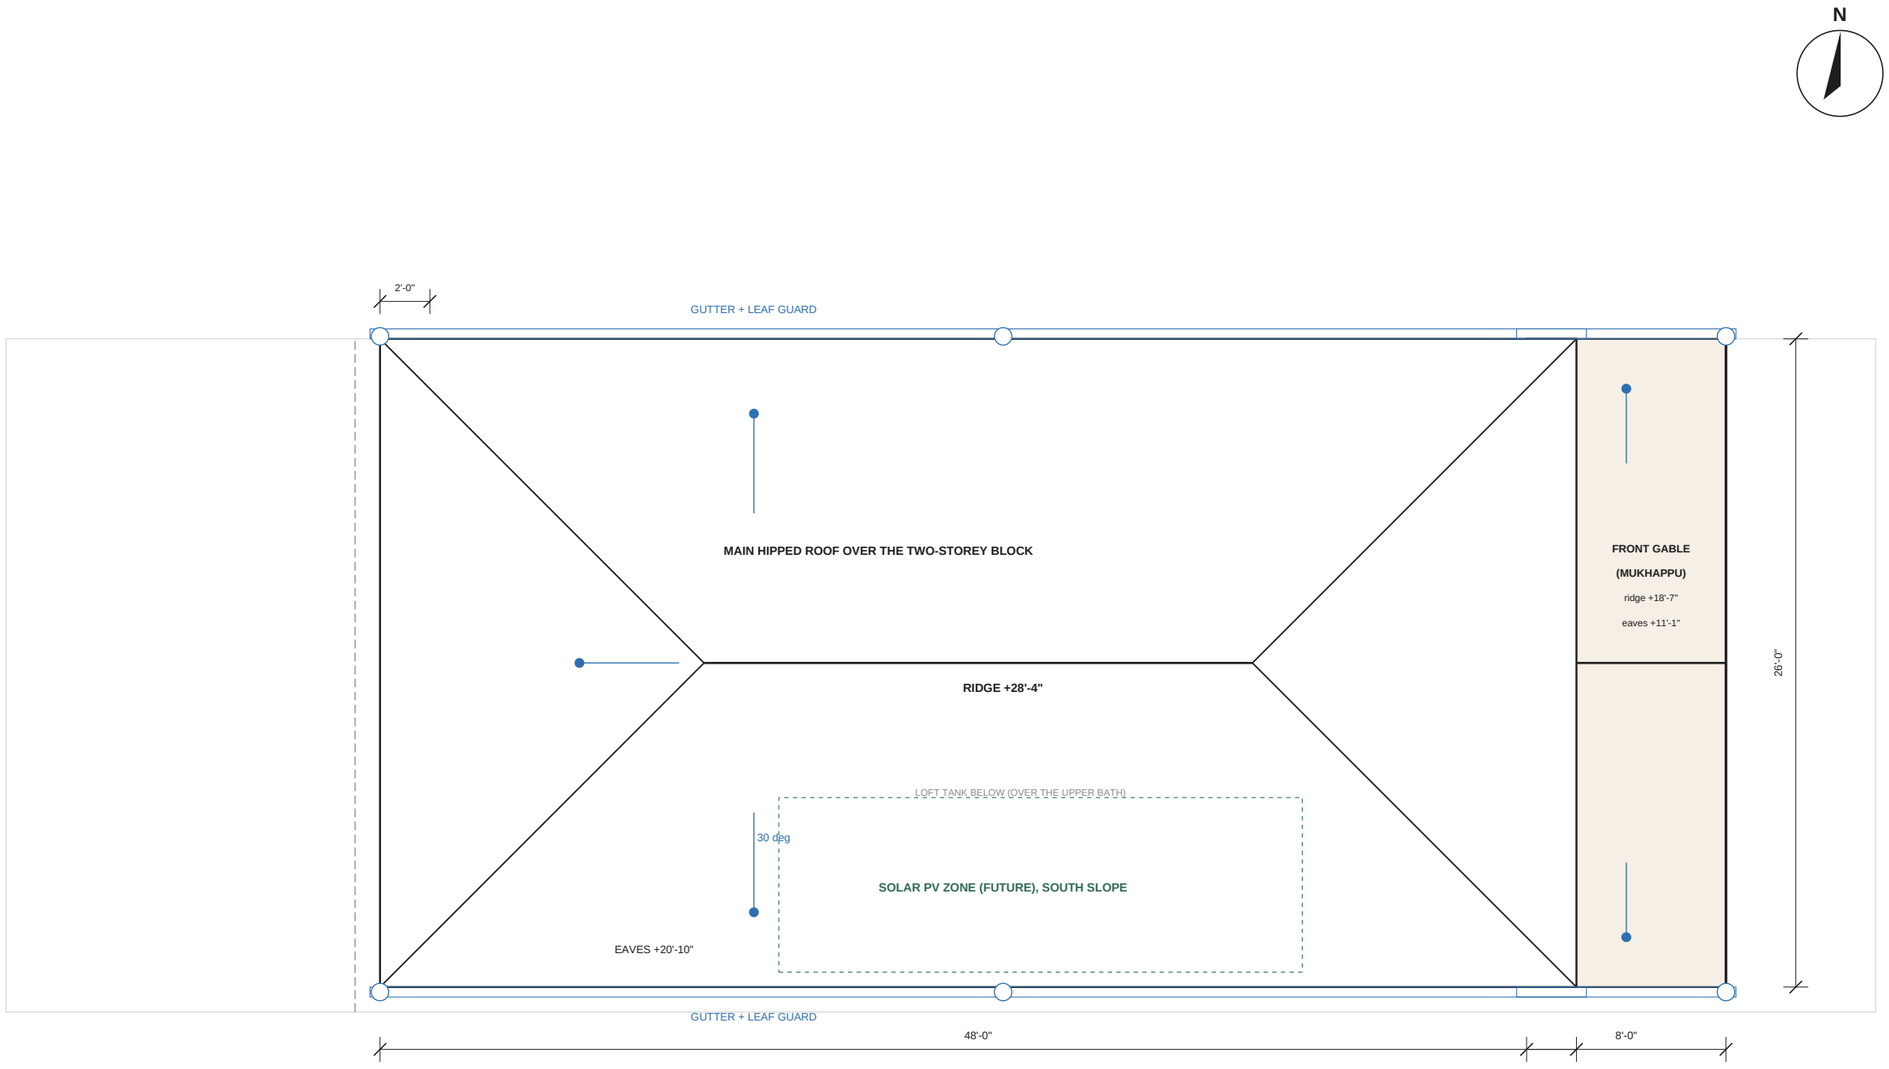



## Roof detailing (Guntur: heat, cyclone wind, short heavy rain)

- Every tile along eaves, verges, hips and ridges clipped or screwed; every third row elsewhere. Cyclone winds lift loose tiles first at the edges, and the main roof is now 20 ft up.
- Main roof trusses bolted to the first-floor ring beam; front gable trusses to the ground-floor ring beam; purlins cleated, not just welded tacks.
- Where the front gable meets the east wall of the two-storey block: GI / aluminium apron flashing chased into the wall, with a counter-flashing; the main roof's east eave overhangs it by 2 ft.
- Eaves 2'-0" beyond the wall line (kept inside the 27 ft plot on the north) with drip edges and gutters on both roofs; downpipes at 6 points into the sump filter, overflow to the road drain.
- Over the covered terrace the main roof sits on galvanised steel posts and steel trusses instead of walls; same tiles and fixings. No ridge ventilator: hot air under the roof escapes at the terrace's open sides.
- Attic over the first-floor rooms vented at the ridge and soffits with insect mesh; 50 mm insulation on the deck. Loft water tank on a steel platform over the upper bath.
- Leave a 25 mm conduit from roof to DB now for future solar PV on the south slope.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Roof plan** |
| Sheet | **A-110** |
| Scale | 1:75 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

## NORTH ELEVATION

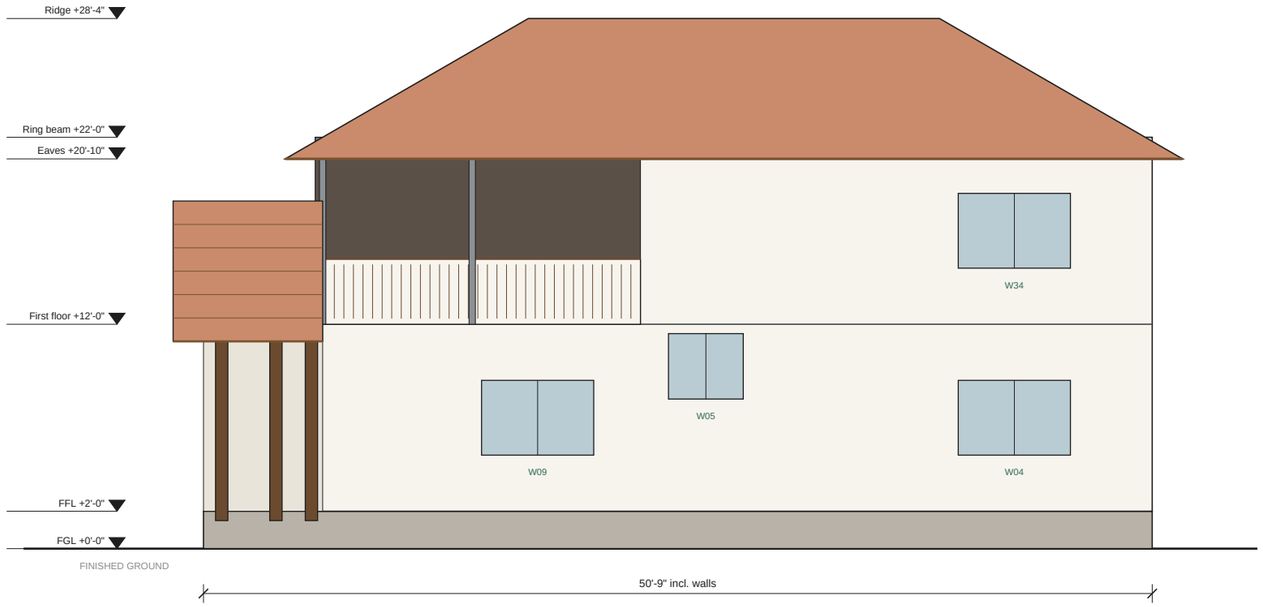


## SOUTH ELEVATION




Two-tier roof: the main hipped roof over the two-storey block (on steel posts over the covered terrace), the low front gable over the verandah and kitchen front. Brown line = fascia with gutter.

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)


Guntur, Andhra Pradesh

Plot 27' x 75' (front 61' used), road on east


Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **North and south elevations** |
| Sheet | **A-201** |
| Scale | 1:100 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

## EAST ELEVATION (ROAD SIDE)

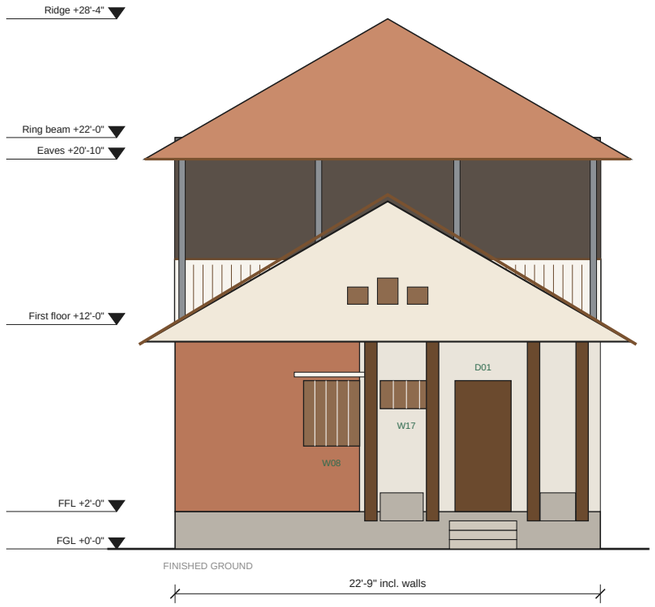


## WEST ELEVATION

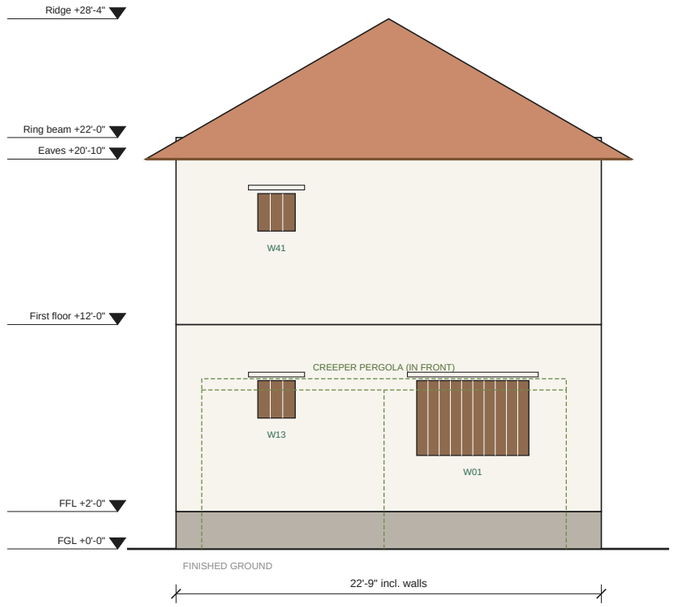


- Front gable (mukhappu) over the verandah and kitchen front; the covered terrace sits 6 ft back behind it, open behind a railing under the main roof on slim steel posts.
- Plinth face clad 2 ft in rough stone: the splash zone stays clean and does not erode.
- West wall: the upper master's west wall is solid (afternoon sun); the room above the small bedroom has only a small high vent on the west. The creeper pergola shades the ground floor.
- Entrance: 3 risers of 6 in, 12 in treads, flamed granite with a nosing; foot-wash tap beside the steps.

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)


Guntur, Andhra Pradesh

Plot 27' x 75' (front 61' used), road on east


Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **East (road) and west elevations** |
| Sheet | **A-202** |
| Scale | 1:100 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

## SECTION B-B: LONG SECTION THROUGH THE SMALL BEDROOM AND THE MASTER'S SITTING ZONE ABOVE, THE STAIR, THE LIVING WITH THE COVERED TERRACE ABOVE, AND THE POOMUKHAM

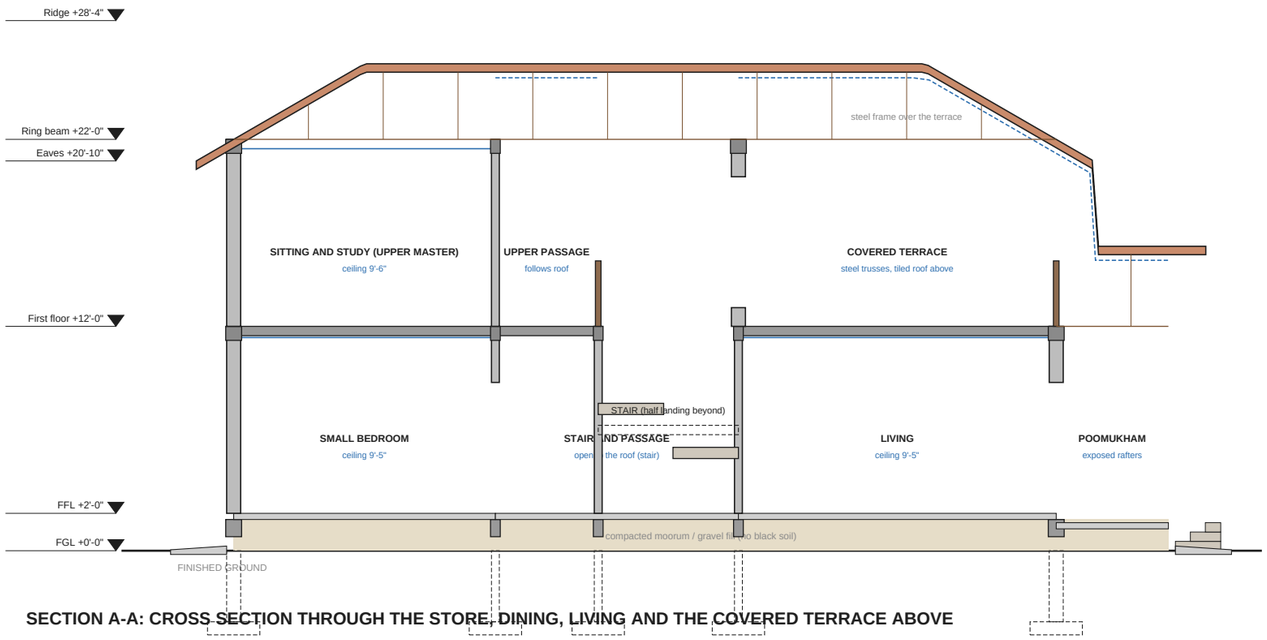


## SECTION A-A: CROSS SECTION THROUGH THE STORE, DINING, LIVING AND THE COVERED TERRACE ABOVE

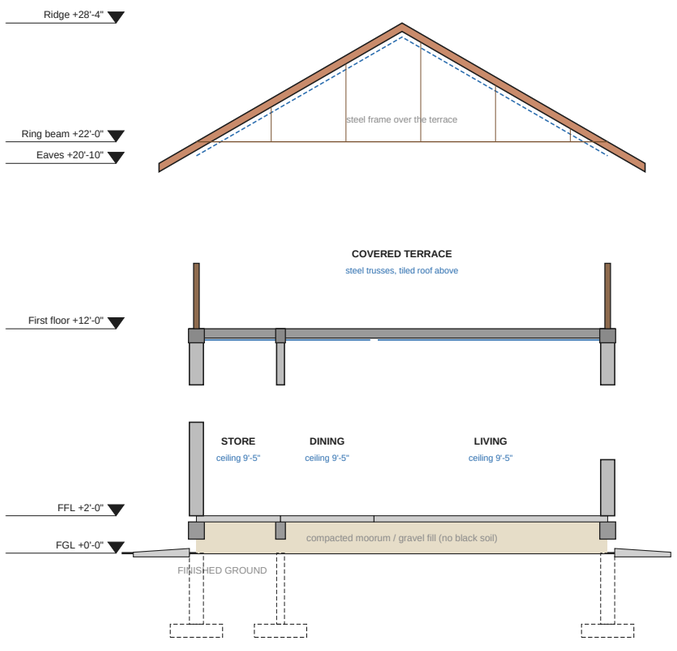


### Section notes

- Clay tiles on battens, membrane, 50 mm insulation, cement-fibre deck on purlins (attic over the first-floor rooms ventilated at ridge and soffit).
- Main roof trusses bolted to the first-floor ring beam; front gable trusses to the ground-floor ring beam (cyclone uplift).
- First-floor RCC slab over the whole two-storey block; over the front half it is the covered terrace, waterproofed, under the main roof on galvanised steel posts and steel trusses.
- RCC lintel band at door-head level on both floors (seismic zone III). AAC walls in an RCC frame; mesh over every block-to-concrete joint.
- Ground-floor rooms have a plastered slab soffit at about 9'-5" (blue); first-floor rooms have insulated false ceilings; the stair and terrace are open to the roof.
- Dog-leg stair, 17 risers of about 7 in; teak handrail; timber jali to the living and to the terrace.
- Plinth beam with DPC; plinth fill of compacted moorum, never black soil; anti-termite treatment at every layer.
- Footings dashed and indicative only: type and depth by the engineer after the soil test (two-storey loads).

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)


Guntur, Andhra Pradesh

Plot 27' x 75' (front 61' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).


| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Sections A-A and B-B** |
| Sheet | **A-301** |
| Scale | 1:100 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

## DOORS (viewed from the side the door swings into; vents above inner doors, 7'-6" to 9'-0"; none at bedrooms or bathrooms)

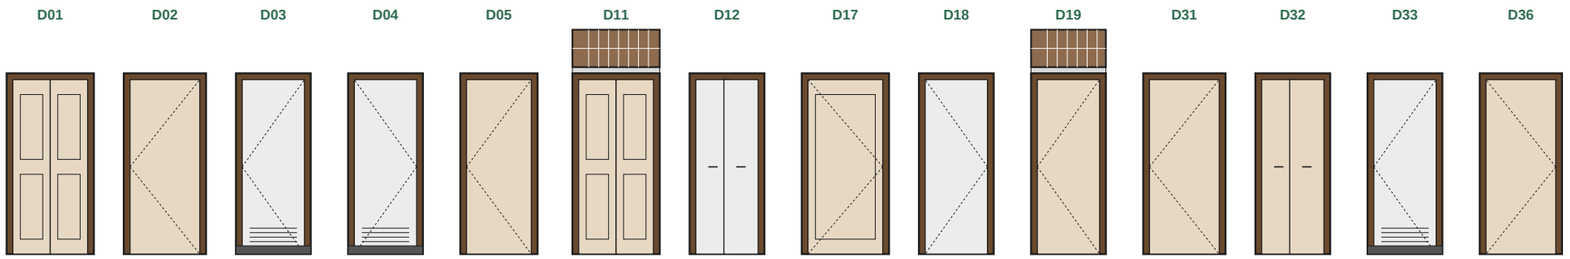

| D01 | D02 | D03 | D04 | D05 | D11 | D12 | D17 | D18 | D19 | D31 | D32 | D33 | D36 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3'-0" x 7'-0" | 2'-9.5" x 7'-0" | 2'-6" x 7'-0" | 2'-6" x 7'-0" | 2'-7" x 7'-0" | 3'-0" x 7'-0" | 2'-6" x 7'-0" | 3'-0" x 7'-0" | 2'-6" x 7'-0" | 2'-6" x 7'-0" | 2'-9.5" x 7'-0" | 2'-6" x 7'-0" | 2'-6" x 7'-0" | 2'-9.5" x 7'-0" |
| Teak, double leaf, panelled; 4 in raised threshold outside slope; tower bolts + mortise lock | MS frame + grill shutter outside, mesh door inside; 1 in weather bar | Sliding laminated glass, brush seals, soft-close; frosted band at 3-5 ft | Flush, waterproof (WPC/FRP), door closer | WPC/FRP shutter, frame on granite base; louvre at bottom | Carved teak, double leaf (opens inward, clear of the living; faces west, family faces east) *Above: open jali* | WPC/FRP shutter, frame on granite base | Teak frame, glazed upper panel, 3 ft (closes off cooking smoke) | Steel, lockable, louvred top | Flush, teak veneer *Above: open jali* | Flush, teak veneer | Sliding, teak veneer | Flush, waterproof (WPC/FRP) | Teak frame, glazed, 3 ft |

## WINDOWS, GROUND FLOOR (viewed from inside; sill and head heights above the floor)

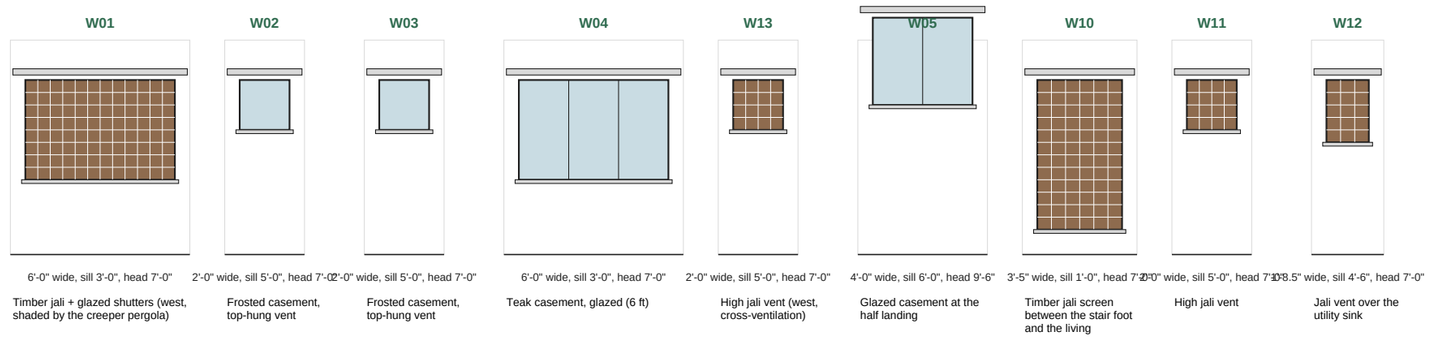

| W01 | W02 | W03 | W04 | W13 | W05 | W10 | W11 | W12 |
|---|---|---|---|---|---|---|---|---|
| 6'-0" wide, sill 3'-0", head 7'-0" | 2'-0" wide, sill 5'-0", head 7'-0" | 2'-0" wide, sill 5'-0", head 7'-0" | 6'-0" wide, sill 3'-0", head 7'-0" | 2'-0" wide, sill 5'-0", head 7'-0" | 4'-0" wide, sill 6'-0", head 9'-6" | 3'-5" wide, sill 1'-0", head 7'-0" | 2'-0" wide, sill 5'-0", head 7'-0" | 1'-8.5" wide, sill 4'-6", head 7'-0" |
| Timber jali + glazed shutters (west, shaded by the creeper pergola) | Frosted casement, top-hung vent | Frosted casement, top-hung vent | Teak casement, glazed (6 ft) | High jali vent (west, cross-ventilation) | Glazed casement at the half landing | Timber jali screen between the stair foot and the living | High jali vent | Jali vent over the utility sink |



| W07 | W08 | W09 | W17 |
|---|---|---|---|
| 6'-0" wide, sill 3'-6", head 7'-0" | 3'-0" wide, sill 3'-6", head 7'-0" | 6'-0" wide, sill 3'-0", head 7'-0" | 2'-9.5" wide, sill 5'-6", head 7'-0" |
| Timber jali + glazed shutters | Timber jali + glazed shutters (3 ft, north end; hob wall kept solid) | Teak casement, glazed (6 ft) | High vent to the poomukham, jali + mesh (lamp smoke out) |

- All windows: insect mesh (SS or fibreglass) on a separate openable or sliding frame, so glass can be cleaned.
- MS safety grill inside the shutters on every ground-floor window; one escape window per bedroom with an openable grill section.
- Teak is costly and must be seasoned; good alternatives in Guntur: sal or hard pinkado for frames, UPVC for wet-side windows.
- Door frames 5 x 2.5 in; frames in bathrooms and wet areas stand on granite or WPC blocks, never touching the wet floor.
- Hardware: SS 304 hinges and screws (hard water and humidity rust MS); magnetic door stoppers on every door.
- Sunshade (chajja) over every window projects 1'-6" to 2'-0" with a drip groove under the front edge.

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)


Guntur, Andhra Pradesh

Plot 27' x 75' (front 61' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Door details and ground-floor windows** |
| Sheet | **A-401** |
| Scale | 1:75 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

## WINDOWS, FIRST FLOOR (viewed from inside; sill and head heights above the first floor)

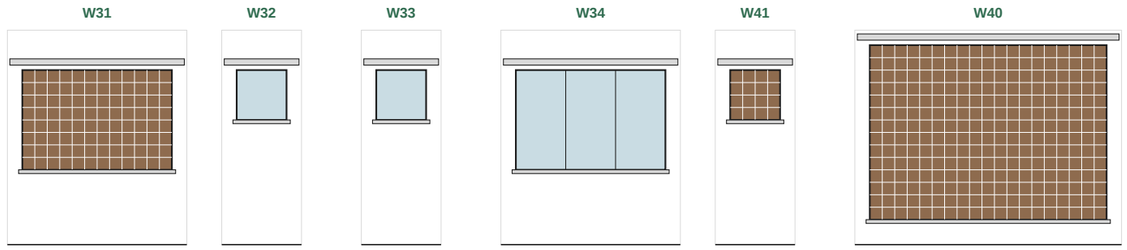


| W31 | W32 | W33 | W34 | W41 | W40 |
|---|---|---|---|---|---|
| 6'-0" wide, sill 3'-0", head 7'-0" | 2'-0" wide, sill 5'-0", head 7'-0" | 2'-0" wide, sill 5'-0", head 7'-0" | 6'-0" wide, sill 3'-0", head 7'-0" | 2'-0" wide, sill 5'-0", head 7'-0" | 9'-6" wide, sill 1'-0", head 8'-0" |
| Timber jali + glazed shutters | Frosted casement | Frosted casement, top-hung vent | Teak casement, glazed (6 ft, north light for the desk and reading) | High jali vent (west, cross-ventilation) | Timber jali screen between the stair well and the covered terrace (light and air for the stair) |

- The stair-well jali (W40) faces the covered terrace: light and air for the stair, no glass to clean.
- The terrace door (D36) off the landing is glazed teak, opening outward with a weather bar.
- Upper windows sit under the main roof's 2 ft eave; sunshades only on the south windows.

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)


Guntur, Andhra Pradesh

Plot 27' x 75' (front 61' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).


| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Window details, first floor** |
| Sheet | **A-402** |
| Scale | 1:75 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

## 1 Plinth, DPC, floor and apron

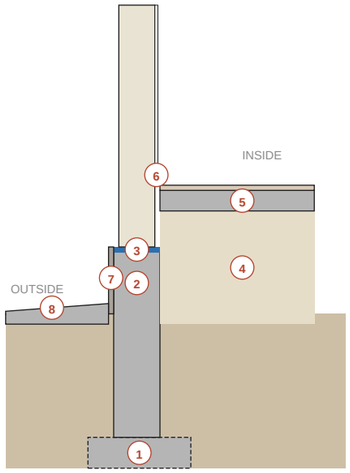



**1** Footing by engineer after soil test; on black cotton soil often 1.5-2.5 m deep or under-reamed piles.
**2** RCC plinth beam ties all columns; 75 mm sand cushion under it on expansive soil.
**3** DPC 40 mm with waterproof compound at plinth top, under the first AAC course.
**4** Moorum / gravel fill compacted in 150 mm layers; anti-termite treatment at each layer.
**5** PCC bed 100 mm with polythene sheet, then screed and tile.
**6** Skirting 4 in, flush with plaster face (plaster stops in a groove): no dust ledge.
**7** Stone cladding on the plinth face to 2 ft: rain splash zone stays clean.
**8** 3 ft PCC apron sloping 1:30 away; polysulphide joint at the wall so water never reaches the foundation.

## 2 Flush skirting at floor-wall joint

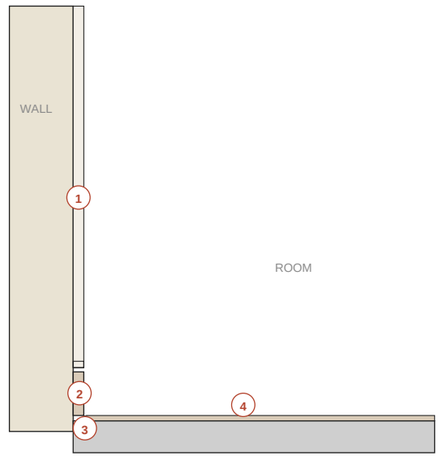



**1** Plaster stops 1/4 in above skirting in a clean groove.
**2** Skirting tile 4 in high set in the plaster line, face flush with the wall.
**3** 5 mm gap filled with silicone / PU sealant: allows movement, no cracked tiles.
**4** In wet rooms use a cove tile or wall tile down to the floor with epoxy grout instead.

## 3 Window sill, frame and sunshade

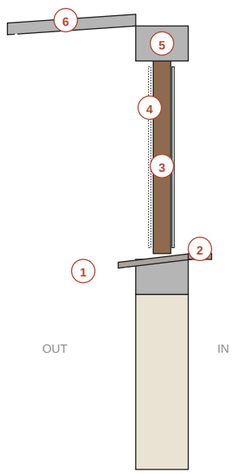


**1** External sill slopes out 1:10 and projects 2 in past the plaster with a drip groove underneath.
**2** Internal sill in stone, 1/2 in higher than the outer sill (water cannot run inward).
**3** Frame on a bed of sealant; gap to wall filled with PU foam and sealed both sides.
**4** Insect mesh on a separate openable frame.
**5** RCC lintel band continuous around the house at door-head level.
**6** Sunshade 1'-6" to 2'-0", top sloped out, drip groove under the front edge (no black streaks on walls).

## 4 Eaves, gutter and roof build-up

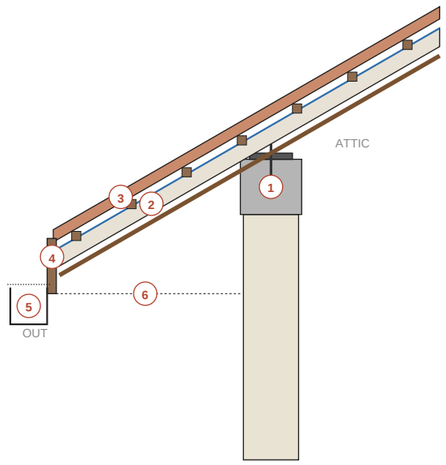


**1** RCC ring beam with holding-down bolts cast in; truss shoe bolted, not just welded.
**2** Cement-fibre deck + 50 mm insulation + breathable membrane under the battens.
**3** Mangalore tiles; eave, verge, hip and ridge tiles clipped or screwed (cyclone wind).
**4** Fascia board with drip edge flashing into the gutter.
**5** 150 mm gutter with leaf guard, falls 1:300 to downpipes.
**6** Ventilated soffit with insect / bird mesh: hot attic air escapes at the ridge.


# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 61' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).


| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Typical details 1: plinth, floor, window, eaves** |
| Sheet | **A-501** |
| Scale | NTS |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

## 5 Bathroom: wet and dry zones

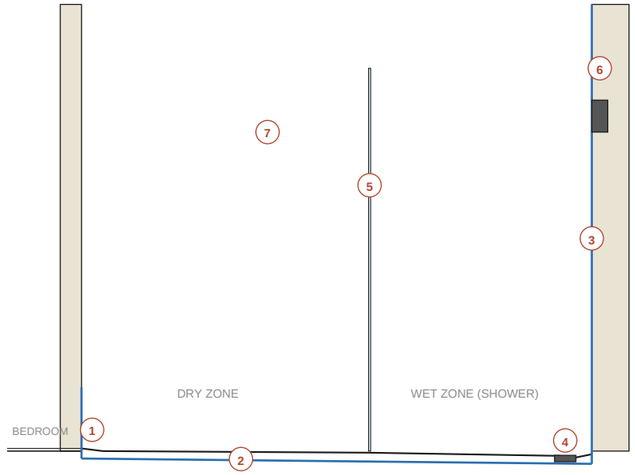



1 Bathroom 12 mm below the bedroom floor with a sloped granite threshold: no raised step to trip on.
2 Waterproof membrane across the floor and 12 in up all walls; 48 h flood test before tiling.
3 Shower walls waterproofed to 7 ft; tiles to ceiling in the shower, 7 ft elsewhere.
4 Linear drain at the far wall; only the wet zone falls (1:60). Dry zone stays dry and safe.
5 8 mm toughened glass partition, 6 in clear of the floor drain line; matt fittings hide hard-water marks.
6 Concealed diverter and pipes in the 7 in wet wall; isolation valve outside the bathroom.
7 Exhaust fan high on the outer wall, opposite the door, ducted outside (not into the attic).

## 6 Kitchen counter and chimney

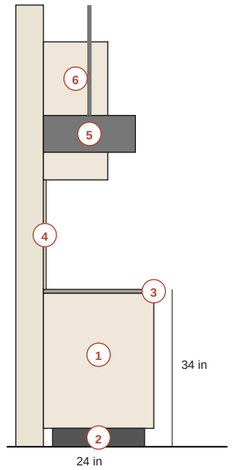



1 Counter top at 34 in (865 mm) for standing cooking; 30-31 in section for a chapati / grinding area.
2 Base units on 4 in legs or a granite plinth: floor can be mopped, no termites, no water damage.
3 20 mm granite (local Chimakurthy / Ongole) with a drip edge; sink under the window, hob on the east run.
4 Stone or tile between counter and wall cabinets, full height; no painted wall behind the hob.
5 Chimney 26-30 in above the hob, ducted straight out through the wall (no long bends).
6 Wall cabinets 14 in deep, starting 22-24 in above the counter; plenty of 16 A sockets at 42 in.

## 7 Hand-wash basin (serving counter)

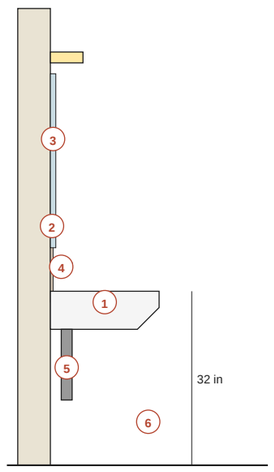



1 Wall-hung basin, rim at 32 in (810 mm); bottle trap, so the floor below can be cleaned.
2 Tiled or stone splash-back 2 ft above the basin: painted walls stain and peel here.
3 Mirror from 40 in to 72 in, light above (not behind) the mirror, socket at 42 in kept 2 ft from the tap.
4 Soap / shelf niche recessed into the wall, sloped forward so water does not pool.
5 Waste pipe into the wall, not across the floor; a floor trap is not needed for a dining-area basin.
6 Children: keep a fold-down step; tap with a long spout so water lands in the bowl, not on the counter.

## 8 AAC wall joints and chases

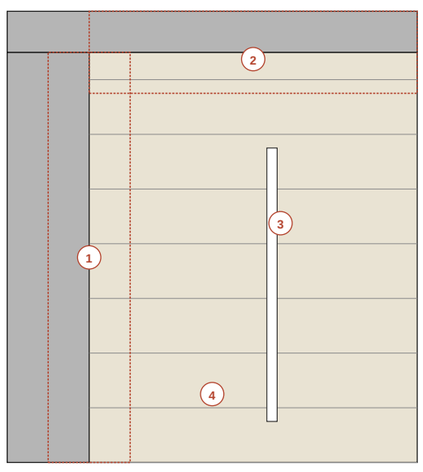


1 Galvanised mesh 150 mm wide, centred on every AAC-to-column and AAC-to-beam joint, before plaster.
2 Top course: 20 mm gap under the beam packed with PU foam / flexible filler, not rigid mortar.
3 Chases cut with a wall chaser, max 1/3 of block depth; refill with polymer mortar + mesh.
4 Thin-bed polymer mortar 3 mm, blocks laid dry; first course on the DPC in normal mortar to level.

## 9 Door thresholds and rain kerbs

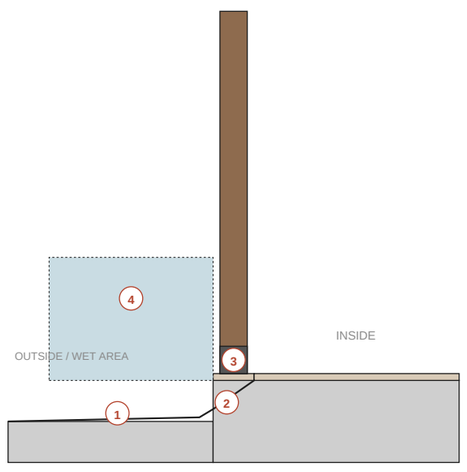


1 Outside floor 3-6 in lower than inside and sloping away 1:50: rain never flows in.
2 Granite threshold with a 1 in upstand / weather bar under external doors.
3 Wet-area door frames stand on a granite or WPC block; wood never touches a wet floor.
4 Open wet area: floor 3 in lower and sloping out to the walkway, so rain drains away from the kitchen door.

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 61' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Typical details 2: bath, kitchen, basin, AAC** |
| Sheet | **A-502** |
| Scale | NTS |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

## Room schedule

| ID | Room | Centreline | Clear | Area sq ft (clear) |
|---|---|---|---|---|
| | **Ground floor** | | | |
| R01 | Master bedroom | 14'-0" x 12'-6" | 13'-4" x 11'-11" | 159 |
| R02 | Master bath | 6'-6" x 7'-0" | 5'-11" x 6'-4" | 38 |
| R03 | Common bath | 6'-6" x 7'-0" | 5'-11" x 6'-4" | 38 |
| R04 | Small bedroom | 14'-0" x 9'-6" | 13'-5" x 8'-11" | 120 |
| R05 | Lobby | 13'-0" x 3'-6" | 12'-9.5" x 3'-2.5" | 41 |
| R06 | Stair and passage | 13'-0" x 11'-6" | 12'-7" x 11'-1.5" | 140 |
| R12 | Store | 4'-0" x 4'-6" | 3'-5" x 3'-11" | 13 |
| R13 | Wet area | 7'-0" x 4'-6" | 6'-6" x 3'-11" | 25 |
| R10 | Dining | 11'-0" x 5'-0" | 10'-6" x 4'-9.5" | 50 |
| R15 | Kitchen | 12'-0" x 9'-6" | 11'-5" x 8'-9" | 100 |
| R16 | Living | 17'-0" x 12'-6" | 16'-5" x 11'-9" | 193 |
| R11 | Pooja | 4'-0" x 4'-0" | 3'-5" x 3'-5" | 12 |
| R17 | Poomukham (verandah) | 6'-0" x 12'-6" | 5'-7.5" x 12'-1.5" | 68 |
| | **First floor** | | | |
| R31 | Upper master bedroom | 14'-0" x 12'-6" | 13'-5" x 12'-1.5" | 163 |
| R32 | Dressing | 6'-6" x 7'-0" | 6'-0" x 6'-5" | 38 |
| R33 | Upper master bath | 6'-6" x 7'-0" | 5'-10" x 6'-5" | 37 |
| R34 | Landing | 13'-0" x 4'-0" | 12'-5" x 3'-9.5" | 47 |
| R35 | Upper passage | 5'-6" x 11'-0" | 5'-3.5" x 10'-7.5" | 56 |
| R36 | Sitting and study (upper master) | 14'-0" x 9'-6" | 13'-5" x 9'-1.5" | 122 |
| R37 | Covered terrace | 17'-0" x 22'-0" | 16'-7.5" x 22'-0" | 366 |
| | Total (clear, both floors) | | | 1826 |

## Door schedule (heights 7'-0"; vents 7'-6" to 9'-0")

| ID | Location | Width | Type | Vent above |
|---|---|---|---|---|
| D01 | Main entrance (centred under the front gable) | 3'-0" | Teak panelled, double leaf | - |
| D02 | Master bedroom (from the lobby) | 2'-9.5" | Flush, teak veneer | - |
| D03 | Master bath (from the master bedroom, opens outward) | 2'-6" | Flush, waterproof (WPC/FRP) | - |
| D04 | Common bath (from the lobby, opens outward) | 2'-6" | Flush, waterproof (WPC/FRP), door closer | - |
| D05 | Small bedroom (from the passage beside the stair) | 2'-7" | Flush, teak veneer | - |
| D11 | Pooja | 3'-0" | Carved teak, double leaf (opens inward, clear of the living; faces west, family faces east) | Open jali |
| D12 | Kitchen to wet area (sliding) | 2'-6" | Steel or WPC sliding, lockable | - |
| D17 | Kitchen entry (west, from the dining; hinged at the north jamb) | 3'-0" | Teak frame, glazed upper panel, 3 ft (closes off cooking smoke) | - |
| D18 | Wet area service door to the south walkway (opens inward) | 2'-6" | Steel, lockable, louvred top | - |
| D19 | Store (from the dining) | 2'-6" | Flush, teak veneer | Open jali |
| D31 | Upper master bedroom (from the landing) | 2'-9.5" | Flush, teak veneer | - |
| D32 | Dressing (sliding, from the upper master) | 2'-6" | Sliding, teak veneer | - |
| D33 | Upper master bath (from the dressing, opens outward; hinged at the north jamb) | 2'-6" | Flush, waterproof (WPC/FRP) | - |
| D36 | Covered terrace (from the landing, opens outward) | 2'-9.5" | Teak frame, glazed, 3 ft | - |

## Window and vent schedule (sill/head above floor)

| ID | Room | Wall | Width | Sill | Head | Type |
|---|---|---|---|---|---|---|
| W01 | Master bedroom | W | 6'-0" | 3'-0" | 7'-0" | Timber jali + glazed shutters (west, shaded by the creeper pergola) |
| W02 | Master bath | S | 2'-0" | 5'-0" | 7'-0" | Frosted casement, top-hung vent |
| W03 | Common bath | S | 2'-0" | 5'-0" | 7'-0" | Frosted casement, top-hung vent |
| W04 | Small bedroom | N | 6'-0" | 3'-0" | 7'-0" | Teak casement, glazed (6 ft) |
| W13 | Small bedroom | W | 2'-0" | 5'-0" | 7'-0" | High jali vent (west, cross-ventilation) |
| W05 | Stair | N | 4'-0" | 6'-0" | 9'-6" | Glazed casement at the half landing |
| W10 | Stair | In | 3'-5" | 1'-0" | 7'-0" | Timber jali screen between the stair foot and the living |
| W11 | Store | S | 2'-0" | 5'-0" | 7'-0" | High jali vent |
| W12 | Wet area | S | 1'-8.5" | 4'-6" | 7'-0" | Jali vent over the utility sink |
| W07 | Kitchen | S | 6'-0" | 3'-6" | 7'-0" | Timber jali + glazed shutters |
| W08 | Kitchen | E | 3'-0" | 3'-6" | 7'-0" | Timber jali + glazed shutters (3 ft, north end; hob wall kept solid) |
| W09 | Living | N | 6'-0" | 3'-0" | 7'-0" | Teak casement, glazed (6 ft) |
| W17 | Pooja | E | 2'-9.5" | 5'-6" | 7'-0" | High vent to the poomukham, jali + mesh (lamp smoke out) |
| W31 | Upper master bedroom (1st) | S | 6'-0" | 3'-0" | 7'-0" | Timber jali + glazed shutters |
| W32 | Dressing (1st) | S | 2'-0" | 5'-0" | 7'-0" | Frosted casement |
| W33 | Upper master bath (1st) | S | 2'-0" | 5'-0" | 7'-0" | Frosted casement, top-hung vent |
| W34 | Sitting and study (upper master) (1st) | N | 6'-0" | 3'-0" | 7'-0" | Teak casement, glazed (6 ft, north light for the desk and reading) |
| W41 | Sitting and study (upper master) (1st) | W | 2'-0" | 5'-0" | 7'-0" | High jali vent (west, cross-ventilation) |
| W40 | Stair (1st) | In | 9'-6" | 1'-0" | 8'-0" | Timber jali screen between the stair well and the covered terrace (light and air for the stair) |
| GV1-3 | Roof | - | - | - | - | Three jali vents in the front gable (mukhappu): air for the roof space over the verandah and the kitchen front |

## Finishes

| Space | Floor | Walls / skirting | Ceiling |
|---|---|---|---|
| Living, dining | Red oxide (IPS) or polished Kota / Tandur stone | 4 in flush skirting in floor stone; lime-finish or mineral paint | RCC slab soffit at 9'-5", plastered (the covered terrace above keeps it shaded) |
| Bedrooms, dressing | Matt vitrified 2x2 ft or red oxide | 4 in flush skirting; putty + washable emulsion | Ground floor: RCC slab soffit at 9'-5", plastered; first floor: false ceiling at 9'-6", 50 mm insulation above |
| Pooja | White marble or teak | Teak panelling behind idol; 4 in marble skirting | Teak / board at 9'-6" |
| Kitchen | Anti-skid matt vitrified or Kota, mid-tone | Tile / stone full height between counter and wall cabinets | Moisture-resistant board at 9'-6", storage loft above |
| Master bath, common bath, upper bath | Anti-skid ceramic (R11), falls 1:60 to drain | Tiles to 7 ft; full height in shower; waterproofing 12 in up all walls, 7 ft in shower | Moisture-resistant board / PVC at 8'-6" |
| Wet area | Rough Cuddapah / Kota stone, falls to drain | 4 ft stone or tile dado | Board at 9'-6" |
| Stair | Granite or Kota treads with a rounded nosing and anti-slip grooves, 10 in treads, 7 in risers | Teak handrail at 3 ft on the open side, timber jali to the living | Open to the roof |
| Store, lobby, landing, passage | Red oxide or vitrified | 4 in flush skirting; washable paint | Slab soffit / board |
| Covered terrace (first floor) | Terracotta anti-skid tile on a waterproofed slab, falls 1:80 to a drain | Railing 3'-6" on the open sides (teak cap, MS or teak balusters); bamboo chiks on the south and east | Steel trusses and the tiled roof above, painted; galvanised steel posts at the terrace edge |
| Poomukham, steps | Flamed / leather-finish granite (not polished) | Granite skirting; plinth face clad 2 ft (splash zone) | Exposed rafters + board |
| Exterior | Plinth apron: PCC 3 ft wide sloped away | AAC + 20 mm plaster with waterproof additive; elastomeric paint | - |
| Roof (all) | Mangalore clay tiles, every edge tile clipped / screwed | Membrane + 50 mm insulation on cement-fibre deck | Steel truss on RCC ring beams (first-floor walls for the main roof, ground-floor walls for the front gable) |

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 27' x 75' (front 61' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).


| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Schedules** |
| Sheet | **A-601** |
| Scale | - |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 27' x 75' (front 61' used), road on east

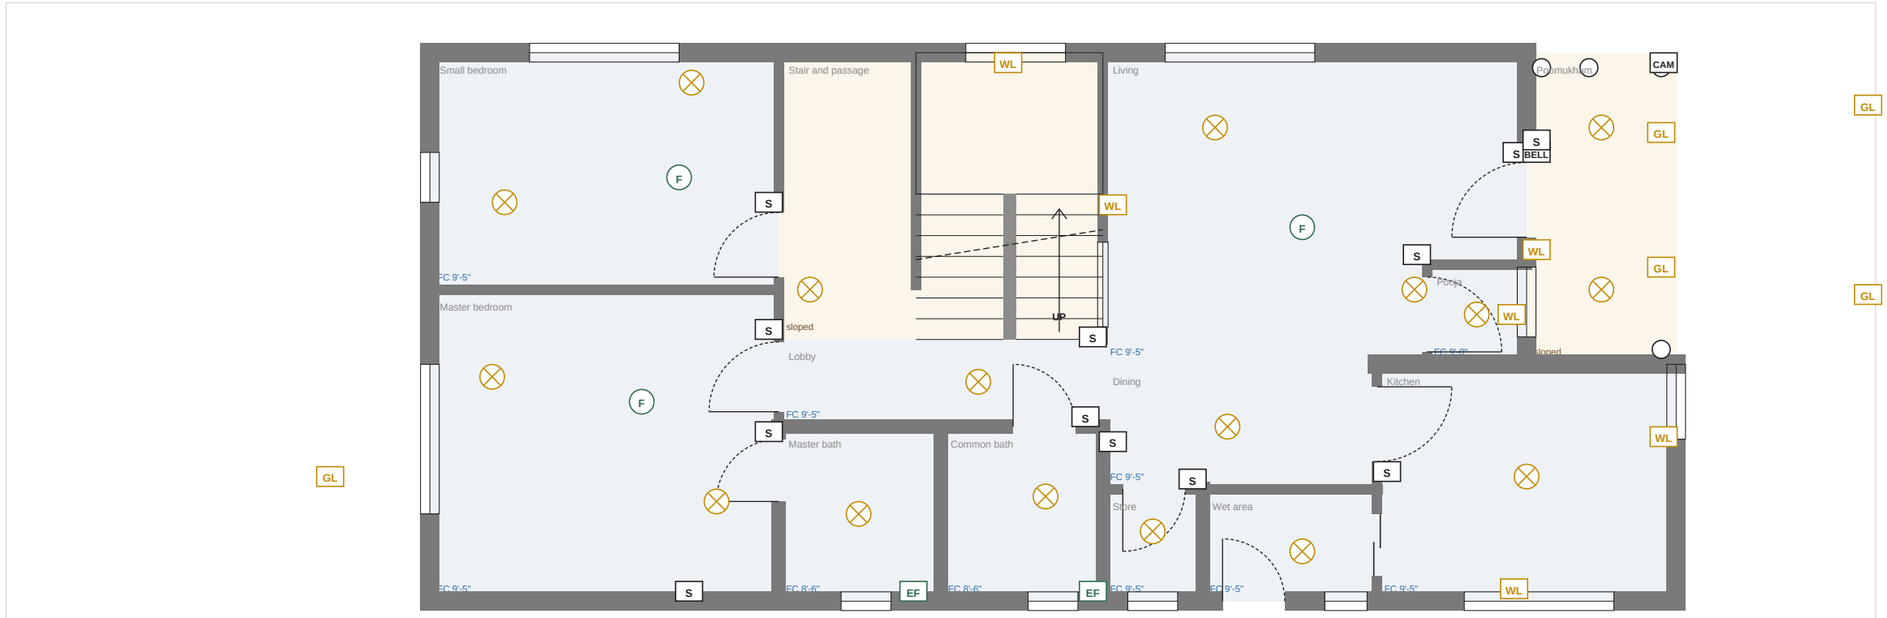


Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

## Lighting schedule

| Code | Item | Height | No. |
|---|---|---|---|
| L | Ceiling light | ceiling | 17 |
| WL | Wall light / mirror light | 6'-6" | 6 |
| F | Ceiling fan point | ceiling | 3 |
| EF | Exhaust fan | 7'-0" | 2 |
| S | Switchboard | 4'-0" | 12 |
| BELL | Bell push | 4'-6" | 1 |
| CAM | CCTV point | 8'-0" | 1 |
| GL | Outdoor / gate light | 7'-0" | 5 |

## Lighting and ceiling notes

- Switchboards on the latch side of every door at 4 ft; 2-way switches at both bedroom beds and both ends of the hall.
- Bathroom switches outside the door; geyser switch with indicator lamp outside too.
- Fans at least 7 ft clear of the floor; long downrods in sloped ceilings; fan hooks cast or bolted, never in false ceiling board. Terrace fan and lights are wet-rated, hung from the steel trusses.
- Warm 2700-3000 K light in living and bedrooms, 4000 K in kitchen and offices; no downlights directly over the bed head.
- False ceilings (blue) with 50 mm insulation above; access panel near every light cluster and near AC pipe runs.
- Lights, fans, office sockets and router on the inverter circuit; outdoor lights on a timer or photocell.

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Lighting, fans and ceilings, ground floor** |
| Sheet | **E-101** |
| Scale | 1:75 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |


# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 27' x 75' (front 61' used), road on east

N

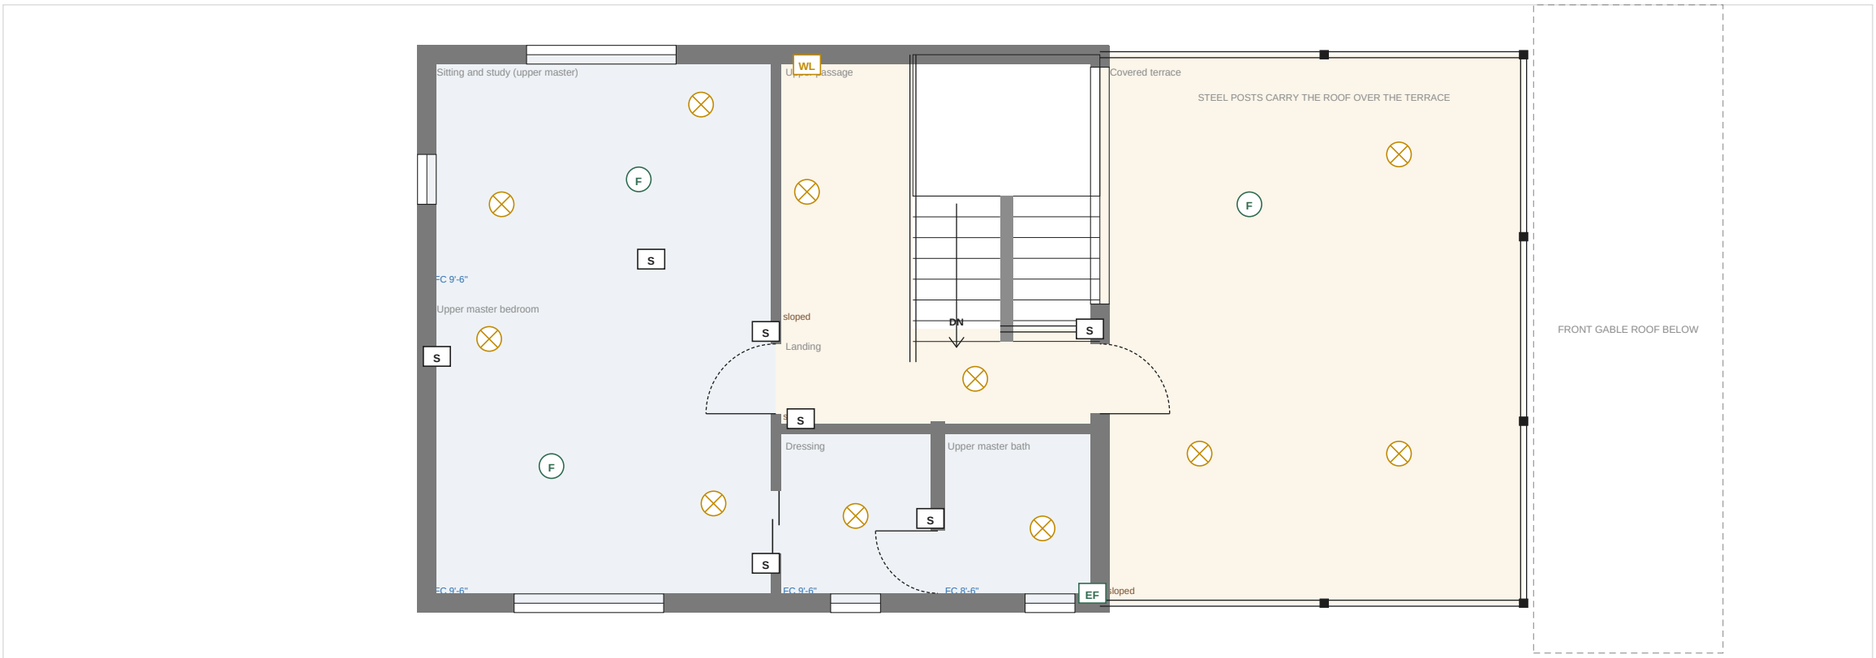


## Lighting schedule

| Code | Item | Height | No. |
|---|---|---|---|
| L | Ceiling light | ceiling | 11 |
| WL | Wall light / mirror light | 6'-6" | 1 |
| F | Ceiling fan point | ceiling | 3 |
| EF | Exhaust fan | 7'-0" | 1 |
| S | Switchboard | 4'-0" | 7 |

## Lighting and ceiling notes


- Switchboards on the latch side of every door at 4 ft; 2-way switches at both bedroom beds and both ends of the hall.
- Bathroom switches outside the door; geyser switch with indicator lamp outside too.
- Fans at least 7 ft clear of the floor; long downrods in sloped ceilings; fan hooks cast or bolted, never in false ceiling board. Terrace fan and lights are wet-rated, hung from the steel trusses.
- Warm 2700-3000 K light in living and bedrooms, 4000 K in kitchen and offices; no downlights directly over the bed head.
- False ceilings (blue) with 50 mm insulation above; access panel near every light cluster and near AC pipe runs.
- Lights, fans, office sockets and router on the inverter circuit; outdoor lights on a timer or photocell.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Lighting, fans and ceilings, first floor** |
| Sheet | **E-102** |
| Scale | 1:75 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 61' used), road on east

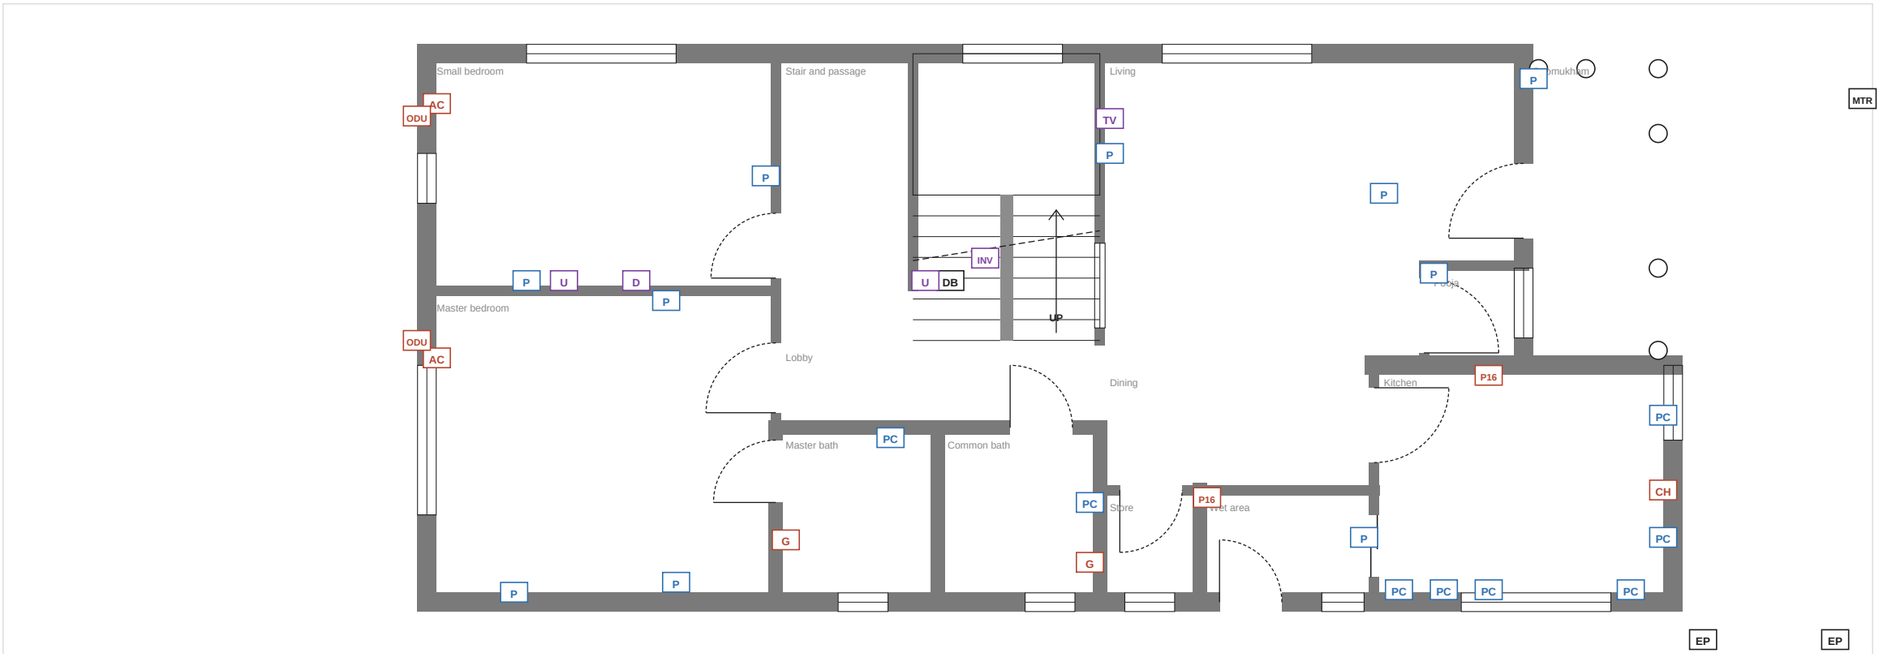


## Power schedule

| Code | Item | Height | No. |
|---|---|---|---|
| CH | Kitchen chimney point (16 A) | 7'-0" | 1 |
| P | 6 A socket | 1'-0" | 10 |
| PC | 6 A socket at counter | 3'-6" | 8 |
| P16 | 16 A power socket | varies | 2 |
| U | Inverter (UPS) socket | 1'-0" | 2 |
| D | Data point (Cat6) | 1'-0" | 1 |
| TV | TV + data point | 3'-6" | 1 |
| AC | AC indoor unit (16 A socket, sleeve, drain) | 7'-6" | 2 |
| ODU | AC outdoor unit bracket | 7'-0" outside | 2 |
| G | Geyser (16 A) | 6'-6" | 2 |
| DB | Distribution board | 5'-0" to top | 1 |
| INV | Inverter + battery | floor | 1 |
| MTR | Meter at gate | 5'-0" | 1 |
| EP | Earth pit | ground | 2 |

## Power notes


- Separate MCB circuit for each AC, geyser, kitchen power, washing machine and pump; RCCB 30 mA on all socket circuits.
- AC: 16 A socket at 7'-6", 65 mm sleeve sloping out, drain pipe to a gully (not onto the wall); ODUs on shaded north / west walls on brackets.
- AC indoor units never above the bed head or desk chair: cold draught on the head is the common complaint.
- Study table (small bedroom): UPS socket + data + 1 normal socket at desk height; Cat6 from the router to the TV and the study table; Wi-Fi access point on the landing for the first floor.
- Kitchen: 5-6 counter sockets at 42 in, 16 A for the fridge, chimney and microwave / OTG; none within 2 ft of the sink.
- DB in the under-stair cupboard off the lobby (central, dry) with 25% spare ways and a sub-board for the first floor; meter at the gate; 2 earth pits; surge protector.
- Empty 25 mm conduits from the roof (solar PV), gate (CCTV, bell, intercom) and sump (pump controller) to the DB.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Power, AC and data, ground floor** |
| Sheet | **E-103** |
| Scale | 1:75 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 61' used), road on east

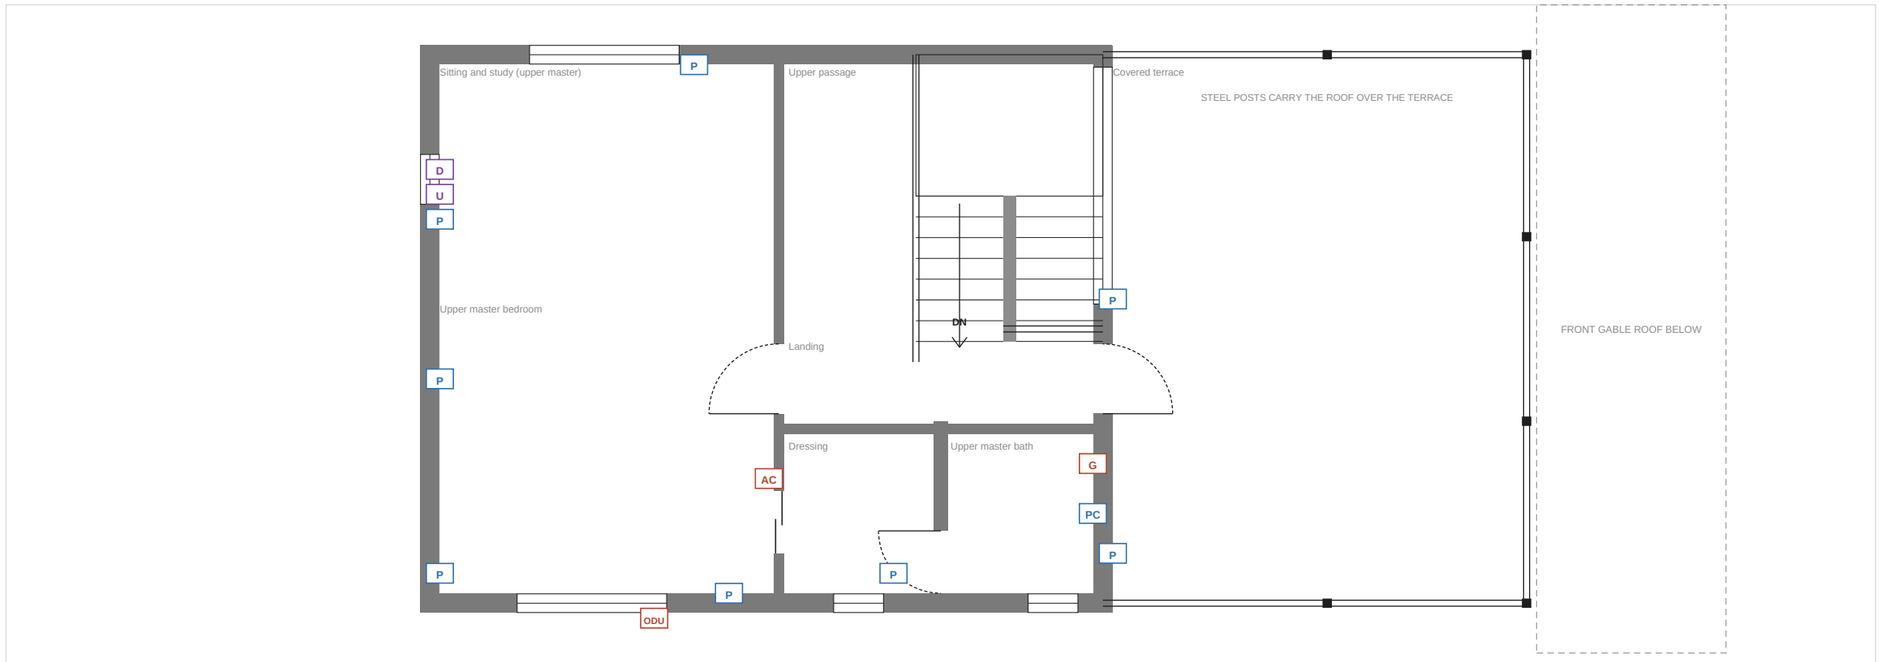


## Power schedule

| Code | Item | Height | No. |
|---|---|---|---|
| P | 6 A socket | 1'-0" | 8 |
| PC | 6 A socket at counter | 3'-6" | 1 |
| U | Inverter (UPS) socket | 1'-0" | 1 |
| D | Data point (Cat6) | 1'-0" | 1 |
| AC | AC indoor unit (16 A socket, sleeve, drain) | 7'-6" | 1 |
| ODU | AC outdoor unit bracket | 7'-0" outside | 1 |
| G | Geyser (16 A) | 6'-6" | 1 |

## Power notes


- Separate MCB circuit for each AC, geyser, kitchen power, washing machine and pump; RCCB 30 mA on all socket circuits.
- AC: 16 A socket at 7'-6", 65 mm sleeve sloping out, drain pipe to a gully (not onto the wall); ODUs on shaded north / west walls on brackets.
- AC indoor units never above the bed head or desk chair: cold draught on the head is the common complaint.
- Study table (small bedroom): UPS socket + data + 1 normal socket at desk height; Cat6 from the router to the TV and the study table; Wi-Fi access point on the landing for the first floor.
- Kitchen: 5-6 counter sockets at 42 in, 16 A for the fridge, chimney and microwave / OTG; none within 2 ft of the sink.
- DB in the under-stair cupboard off the lobby (central, dry) with 25% spare ways and a sub-board for the first floor; meter at the gate; 2 earth pits; surge protector.
- Empty 25 mm conduits from the roof (solar PV), gate (CCTV, bell, intercom) and sump (pump controller) to the DB.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Power, AC and data, first floor** |
| Sheet | **E-104** |
| Scale | 1:75 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |

# Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 61' used), road on east

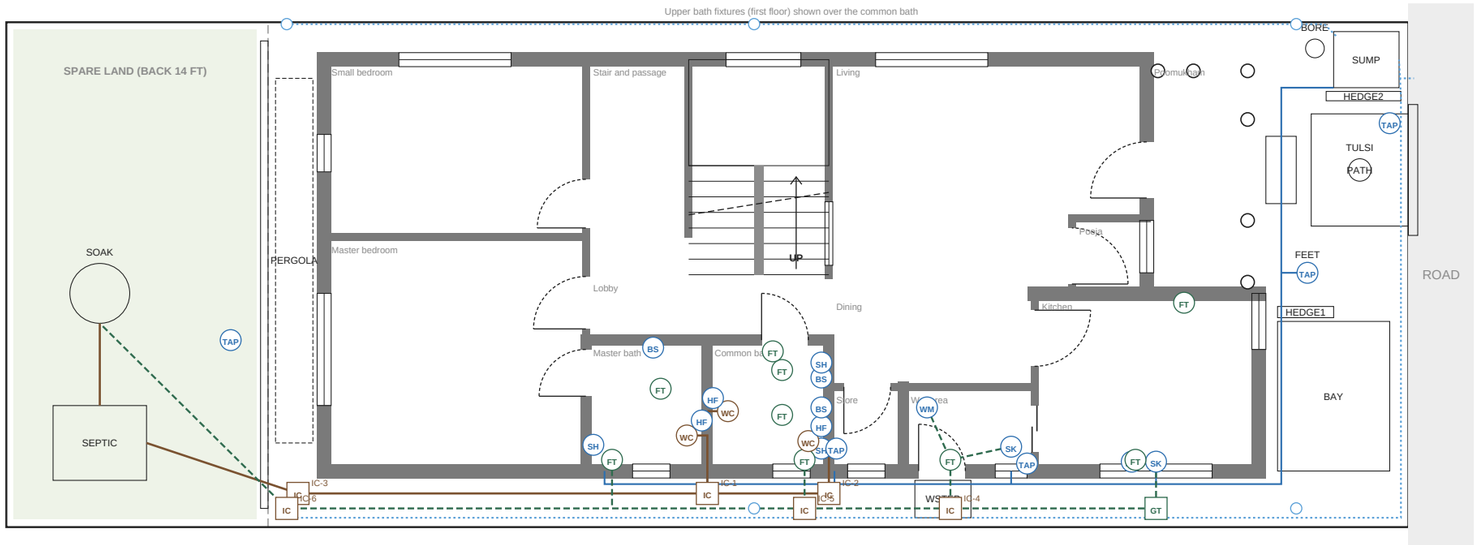


- Water supply (CPVC): sump pump to the loft tank, then down
- Soil line (uPVC 110 mm) to septic tank
- Grey water (uPVC 75 mm) to the soak pit
- Rainwater to sump filter, overflow to road

## Fixtures and points

| Code | Item | No. |
|---|---|---|
| WC | Wall-hung WC, concealed cistern | 3 |
| HF | Health faucet | 3 |
| BS | Wash basin | 3 |
| SH | Shower mixer (hot + cold) | 3 |
| FT | Floor trap / linear drain | 9 |
| SK | Sink | 2 |
| WM | Washing-machine inlet + drain | 1 |
| RO | RO purifier point | 1 |
| TAP | Tap | 5 |
| IC | Inspection chamber | 6 |
| GT | Grease trap | 1 |

## Plumbing notes

- Sump pump fills a 1,000 L loft tank over the upper bath; pressure pump for the showers; isolation valve for each bathroom and the kitchen, outside the room.
- Supply pipes run in wall chases or behind one service panel (no exposed pipes on the facades), never under the floor slab.
- Soil and grey water kept separate; inspection chamber at every bend and junction; 1:40 falls on 110 mm, 1:30 on 75 mm.
- Grease trap before the kitchen line joins anything; vent pipe from each WC stack above the eaves.
- Septic tank (sealed) and a lined soak pit in the spare rear land, behind the baths and about 15 ft from the house, far from the sump; if that land is ever sold, move them or switch to a bio-digester with treated outflow.
- Upper WC stack runs down inside the 7 in wet wall between the common bath and the store, with a vent pipe above the main roof eaves.
- Rain from both gutters to the sump through a first-flush filter; overflow to the road drain.
- Test the bore / supply water: RO for drinking, softener for bathrooms if hardness is high; matt or PVD fittings.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

| | |
|---|---|
| Stage | Draft for professional review (duplex option) |
| Drawing | **Water supply and drainage** |
| Sheet | **P-101** |
| Scale | 1:100 at A3 |
| Revision | C-duplex (option study) |
| Date | 1 Nov 2026 |
| Units | Feet-inches; levels from finished ground |