Kerala Home, Phase 1

Pre-construction drawing set, Guntur, Andhra Pradesh (agricultural land: conversion to be confirmed)

Sheet index

A-000	Cover and sheet index	-
A-001	Design basis and general notes	-
A-101	Site plan and services	1:100
A-102	Ground floor plan	1:75
A-103	First floor plan	1:75
A-104	Furniture layout, ground floor	1:75
A-105	Furniture layout, first floor	1:75
A-106	Working plan, ground floor: clear sizes and sections	1:75
A-107	Working plan, first floor: clear sizes	1:75
A-108	Floor finishes and levels, ground floor	1:75
A-109	Floor finishes and levels, first floor	1:75
A-110	Roof plan	1:75
A-201	North and south elevations	1:100
A-202	East and west elevations	1:100
A-301	Sections A-A and B-B	1:100
A-401	Door details and ground-floor windows	1:75
A-402	Window details, first floor	1:75
A-501	Typical details 1: plinth, floor, window, eaves	NTS
A-502	Typical details 2: bath, kitchen, basin, AAC	NTS
A-601	Schedules	-
E-101	Lighting, fans and ceilings, ground floor	1:75
E-102	Lighting, fans and ceilings, first floor	1:75
E-103	Power, AC and data, ground floor	1:75
E-104	Power, AC and data, first floor	1:75
P-101	Water supply and drainage	1:100

Project data

Site	Guntur, Andhra Pradesh; agricultural land (conversion to confirm)
Plot	27' x 75' = 2,025 sq ft; duplex planned on the front 64' (back 11' spare)
Built footprint	53' x 22' = 1,166 sq ft ground floor; about 525 sq ft enclosed + 420 sq ft covered terrace on the first floor
Carpet area	1,974 sq ft clear, both floors, incl. poomukham and terrace
Construction	Two-storey RCC frame, AAC walls, first-floor slab over the back half, steel-truss roofs with clay tiles
Plinth	FFL +2'-0" above finished ground

Key design decisions

• Duplex option (branch feature/duplex): the house is planned on the front 64 ft of the plot (the back 11 ft stays spare land) as a 53 ft x 22 ft two-level house, 1,166 sq ft on the ground floor and about 525 sq ft enclosed on the first floor plus a 19 x 22 ft covered terrace.

• House lengthened from 44 to 50 ft (after review: rooms felt small): 2 ft to the bedrooms (both now 14 ft wide), 3 ft to the bath strip (master, common and upper baths about 6 x 6'-5" clear, dressing 6 ft wide, passage to the small bedroom 5'-6"), 1 ft to the dining, living and wet area. Front yard unchanged at 8 ft; the trial plot grows from 55 to 61 ft.

• Then to 53 ft (rooms still felt tight on depth): the back half re-split so the master is 11'-6" deep and the small bedroom 10'-6" (about 13'-4" x 10'-11" and 13'-5" x 9'-11" clear); 2 ft added through the kitchen (about 13'-7" x 9'-1" clear, the living to 19 ft, the terrace to 19 ft); 1 ft added to the bath strip so all three baths are about 6'-5" x 6'-4" clear and the dressing 6'-6". Trial plot now 64 ft, spare land 11 ft.No double height (changed after review): a slab covers the whole two-storey block, so the living, dining, kitchen, pooja, store and wet area all have flat ceilings at about 9'-5" and no dead space above the kitchen. Over the front half the first floor is a covered terrace, opening off the landing, with railings on three sides.

• Ground floor: master bedroom (north-west) with its entry and attached bath, second bedroom (south-west), common bath, dining room, lobby and a dog-leg stair seen from the living through a timber jali. First floor: upper master with its bath and a sitting and study zone (the outdoor lounge was merged into it once the terrace was added), a study off the landing, a passage and the covered terrace.

• Roof: one hipped clay-tile roof over the two-storey block, carried on walls over the back rooms and on a light galvanised steel frame (posts and trusses) over the terrace, and a wide front gable (mukhappu) over the single-storey poomukham and kitchen front, so the house reads as a two-tier Kerala roof.

• No ridge ventilator (removed after review): with the terrace open on three sides, hot air under the main roof escapes at its open edges; the attic over the first-floor rooms is vented by meshed ridge and soffit vents.

• Review (2 Nov 2026): the store is folded into the dining as a nook with a 3 ft south window, so the dining has its own daylight (provisions go to the under-stair cupboard and a kitchen loft); a 3 ft window lights the end of the upper passage; a high south window above the ground master's bed head gives morning light and cross-breeze; the common bath door opens inward so it never blocks the lobby; the dresser is shortened clear of the upper bath door.

• Review (2 Nov 2026, no wasted space): the passage beside the stair becomes the small bedroom's entry with a wardrobe and an attached Bath 2 (6'-6" x 7 ft, north window), entered straight from the lobby; the kitchen opens to the dining over a granite serving hatch with glazed sliding shutters, with its entry moved to a sliding door from the living, so the dining strip takes a 4-seat table and the nook a crockery unit.

• Review (2 Nov 2026, two baths on the ground floor): the north-west bedroom becomes the ground master (14 x 12'-6", its own entry with a wardrobe and an attached bath); the south-west room becomes the second bedroom (14 x 9'-6") and uses the common bath; the old master bath becomes its walk-in wardrobe and study alcove with a south window, entered from the lobby. Vastu: the upstairs south-west suite stays the main master; toilets now sit in the north-west and south only.

• Review (2 Nov 2026, dining and doors): the common bath moves west into the old walk-in alcove, so the old bath and the nook become a real dining room (11 x 7 ft with a 4 ft south window, open to the lobby and the serving side) with a 5 x 3 ft table; the second bedroom gets its own door from the lobby (bedroom split at 10'-6" / 11'-6"); the master bath door moves to its west wall, straight from the bedroom (beds now head south in both ground bedrooms); upstairs the bath moves over the common bath (one soil stack) and the old dressing becomes a study off the landing with a south window.

• All four bath fittings stack in the south band (two baths over two); the septic tank and soak pit move to the spare rear land behind the baths, freeing the front yard; the water tank goes into the roof space (no tank stand).

• Site is in Guntur, Andhra Pradesh (farm land), not Kerala; Kerala style kept, construction adapted to local climate and soil.

• RCC frame with AAC block walls: 9 in outer, 5 in inner, 7 in where plumbing is concealed.

• Plinth 2 ft above finished ground; poomukham 6 in lower; bathrooms 12 mm lower with no raised threshold.

• AC provisions (points, sleeves, drain, outdoor-unit brackets) in both bedrooms, the office and living; passive cooling first.

• Flat insulated false ceilings in bedrooms, offices, baths and kitchen; sloped ceilings in living, dining and verandah.

• No glass skylight: the dining gets borrowed daylight from the living, the nook window and the hall; a louvred ventilator lantern above it lets hot air out (no glass, so no greenhouse heat).

• Service band on south (heat buffer): bedrooms and living get north light.

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 27' x 75' (front 64' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Cover and sheet index**
Sheet	**A-000**
Scale	-
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Site conditions (Guntur)

• **Heat:** summer days 40-45 C (March-June). Insulated roof, ventilated attic, shaded west and south walls, AC provisions.

• **Rain:** about 850-1000 mm a year, mostly June-October, with short cyclonic downpours in Oct-Nov. Deep eaves, gutters, drip grooves.

• **Wind:** coastal cyclone belt. Trusses bolted down; every edge tile clipped; no light sheeting that can lift.

• **Soil:** black cotton (expansive) soil is common. A soil test decides the foundation; keep water and trees away from the walls.

• **Earthquake:** seismic zone III. RCC frame with lintel and ring bands.

• **Water:** groundwater is often hard with high fluoride. RO for drinking, softener if needed, matt fittings.

• **Termites and mosquitoes:** anti-termite treatment before the plinth; mesh on every opening.

• **Land:** agricultural land. Confirm conversion and the permission route before work starts.

Levels and heights

Level	Above finished ground
Finished ground (FGL)	+0'-0"
Poomukham floor	+1'-6"
Wet area floor	+1'-9"
House floor (FFL)	+2'-0"
Bathroom floors	+1'-11.5" (12 mm drop)
Door head / lintel band	+9'-0"
False ceilings (rooms)	+11'-6"
False ceilings (baths)	+10'-6"
Ground ring beam / first-floor slab	+12'-0"
First floor (finished)	+12'-0"
First-floor ring beam	+22'-0"
Front gable eaves / ridge	+11'-1" / +18'-7"
Main roof eaves (tile edge)	+20'-10"
Main ridge	+28'-4"

Wall types

Type	Build-up	Where
EXT	200 mm AAC + 20 mm external plaster + 12 mm internal plaster (~9 in)	Outer walls, kitchen north wall
WET	150 mm AAC + plaster both faces (~7 in): concealed plumbing walls	Walls with concealed plumbing
INT	100 mm AAC + plaster both faces (~5 in)	Other inner walls

General notes

• Dimensions are to wall centrelines unless marked 'clear'. Clear room sizes are on A-106 (ground) and A-107 (first floor).

• Concrete, steel, foundations and member sizes are by the structural engineer. Column positions are not shown and must be coordinated with the furniture layout.

• AAC: 150 mm galvanised mesh over every block-concrete joint; chases cut by machine; no hammering.

• All external sills, sunshades and copings get drip grooves; every external opening gets mosquito mesh.

• Wet rooms: waterproofing on floors, 12 in up the walls and 7 ft in showers; 48 h flood test before tiling.

• Skirting is flush with the plaster (no dust ledge). Grout in wet areas is epoxy.

• Pipes and conduits are laid before plaster and photographed with a tape measure in view, for future drilling.

• Keep 3 ft paved apron around the house, sloped away. No gardens, soak pits or big trees within 6-8 ft of walls.

• Two storeys: columns, footings, the first-floor slab and the stair are designed by the engineer for two floors; RCC column stubs at the terrace edge take the steel roof posts.

Hold points (stop and inspect)

Stage	Check before it is covered up	Who
Before design freeze	Soil test report, level survey of plot and road, water quality test (TDS, hardness, fluoride)	Owner, engineer
Excavation	Footing depth and bearing layer seen in the pit; no black soil left under footings	Structural engineer
Before each concrete pour	Reinforcement, cover blocks, laps and column positions checked; photos taken	Engineer / site supervisor
Plinth	Anti-termite treatment (certificate), fill compaction, DPC laid and cured	Supervisor
Before plaster	Conduits, pipes, AC sleeves, mesh over AAC joints; photos with a tape measure in view	Owner, supervisor
Wet rooms	Waterproofing coats, upturns, 48 h flood test passed before any tile is laid	Owner, plumber
Roof	Truss holding-down bolts, membrane and insulation, edge tiles clipped, flashing where the front gable meets the two-storey wall	Engineer, owner
Before handover	Water test on every floor slope and sill, plumbing pressure test, electrical insulation and earth test	Owner, MEP

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh


Plot 27' x 75' (front 64' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Design basis and general notes**
Sheet	**A-001**
Scale	-
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 64' used), road on east

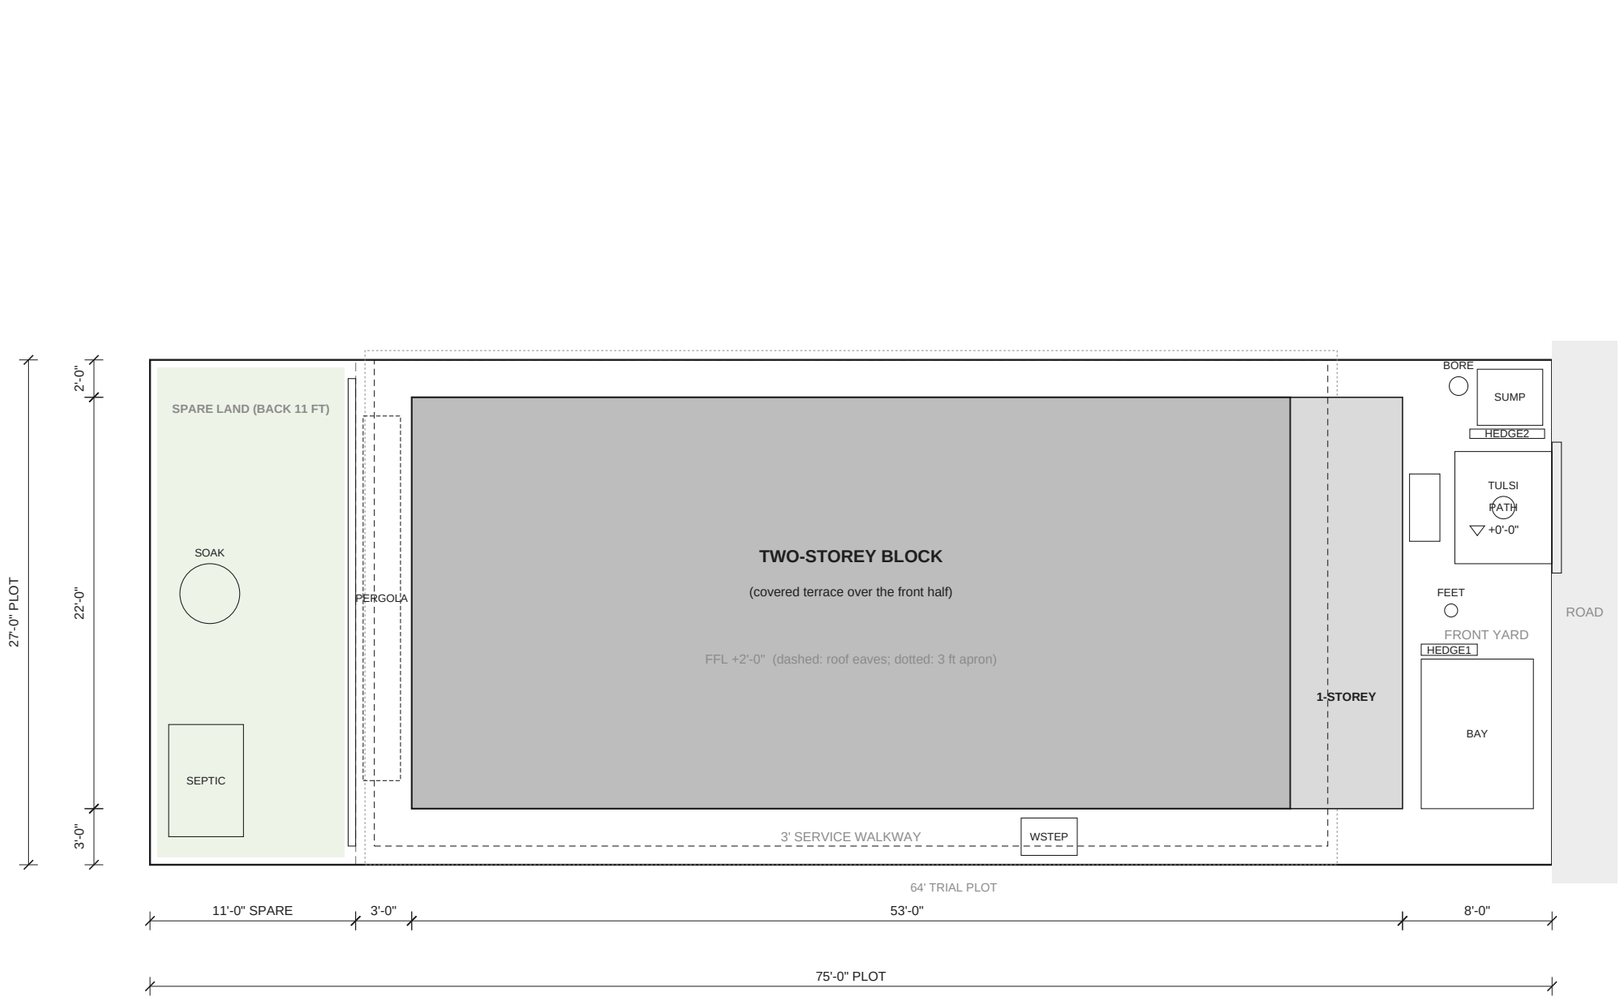

- SPARE: Spare land, back 11 ft (owner's): kitchen garden, clothes drying, septic tank and soak pit
- HEDGE3: Low hedge on the 64 ft line (the trial plot starts here)
- SEPTIC: Septic tank, 2 chambers, sealed RCC, in the spare land behind the baths, heavy-duty covers
- SOAK: Lined soak pit for septic effluent and grey water, in the spare land, about 9 ft from the house
- SUMP: Sump (NE)
- BORE: Borewell (if any), NE
- PERGOLA: Creeper pergola along the west wall (shades the master window; no big trees near walls)


- TULSI: Tulsi thara at the centre of the forecourt, on the door axis
- PATH: Stone-paved forecourt 6 ft wide on the door axis, gate to steps, around the tulsi thara
- HEDGE1: Low hedge screening the two-wheeler bay (access left open by the gate)
- HEDGE2: Low hedge screening the sump
- BAY: Two-wheeler bay (front yard now free of the septic tank)
- GATE: Gate 7 ft, centred on the main door
- STEPS: Entrance steps (3 risers), between the pillars, SS handrail one side
- FEET: Foot-wash tap + drain
- WSTEP: Steps from the wet-area service door down to the walkway (4 risers of about 5 in, along the wall)
- APRON: Plinth protection apron 3 ft, sloped away
- Site drains: finished ground falls 1:100 away from the house to the road side.
- Compound wall: precast RCC post-and-panel, 5 ft, set just inside the plot line; panels lift out, so a run can move later (including across the 64 ft line).

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Site plan and services**
Sheet	**A-101**
Scale	1:100 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 64' used), road on east

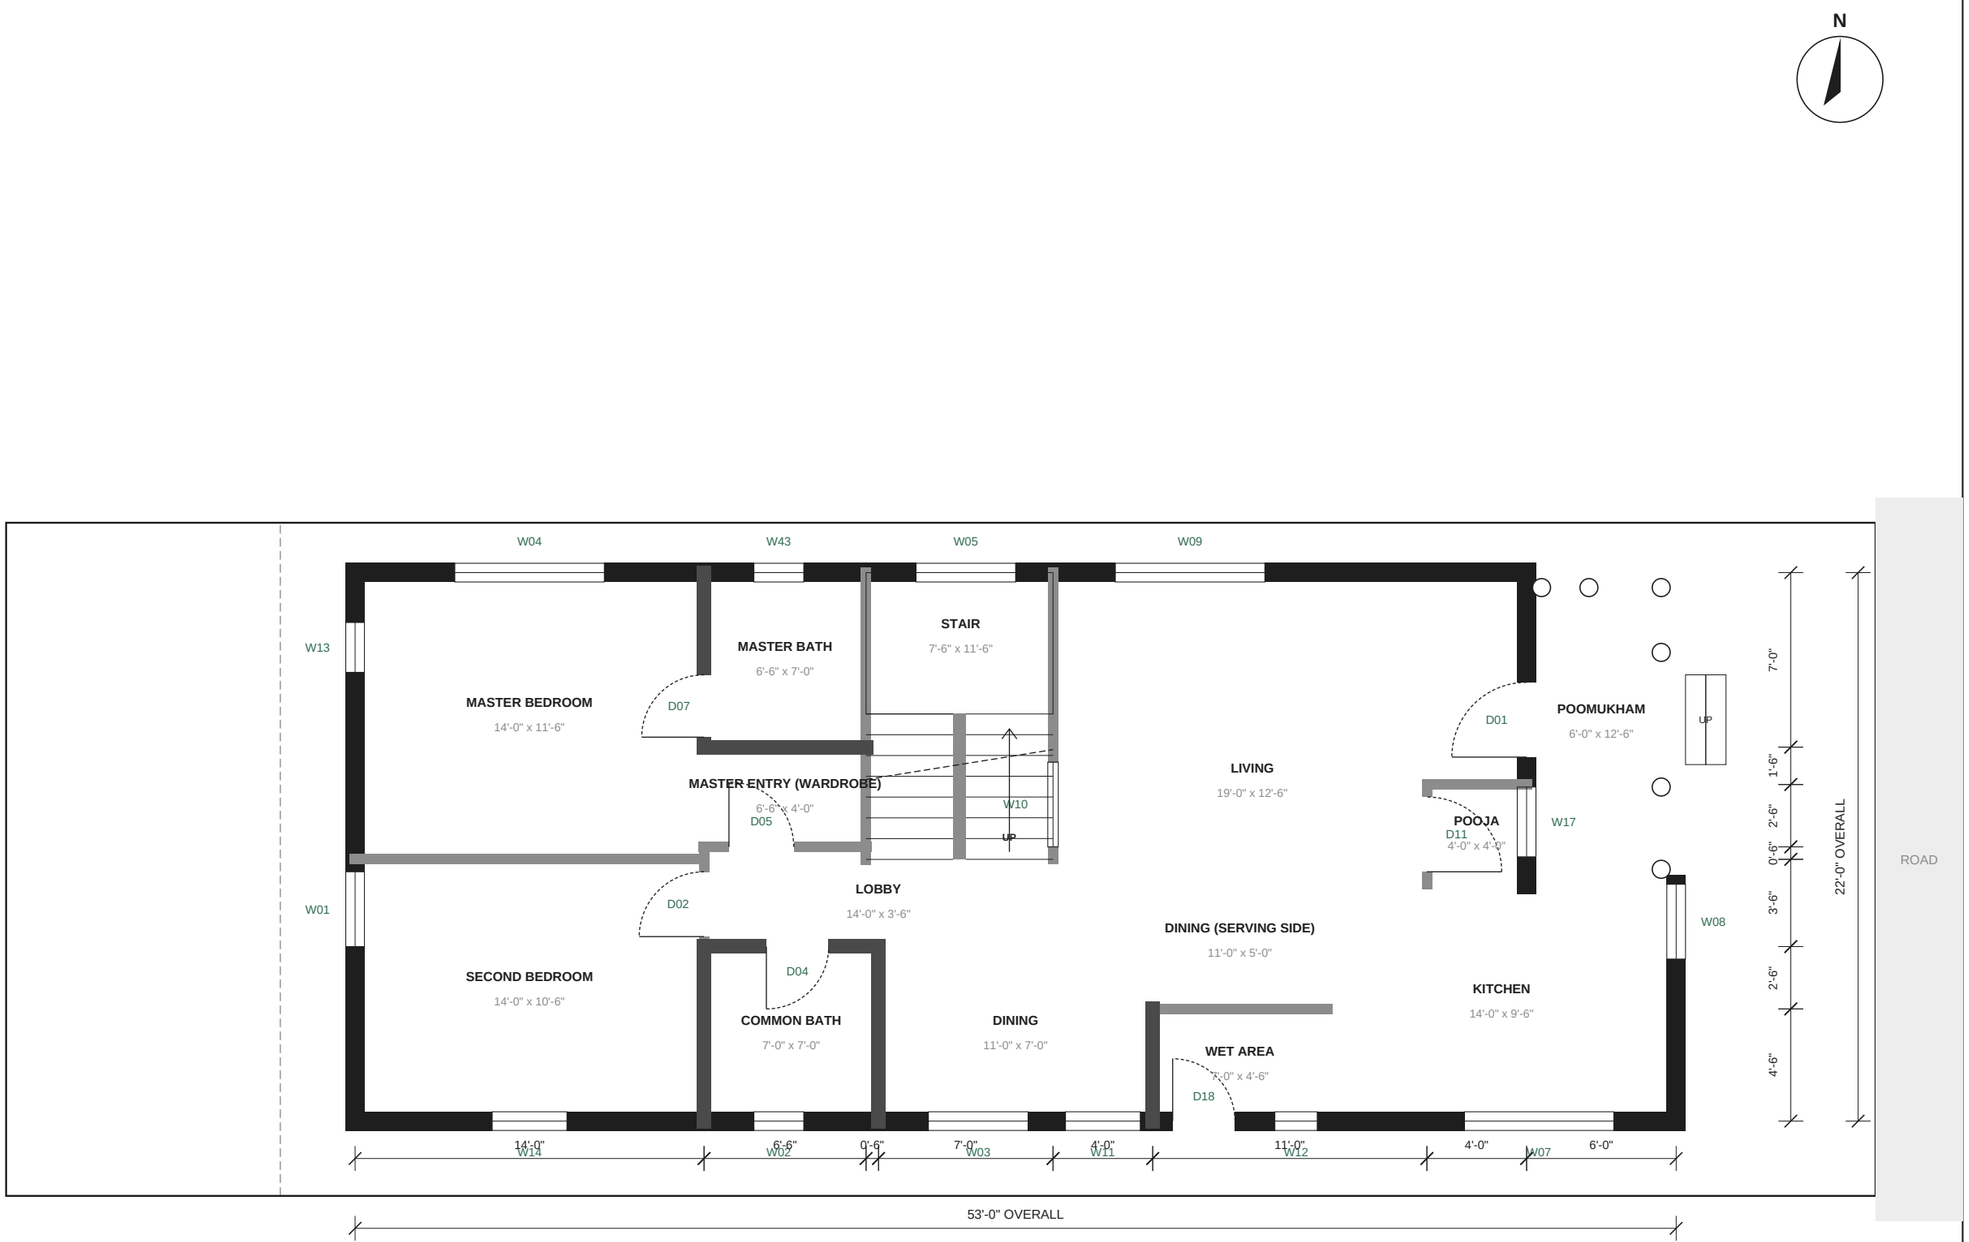

EXT: 200 mm AAC + 20 mm external plaster + 12 mm internal plaster (~9 in)
WET: 150 mm AAC + plaster both faces (~7 in): concealed plumbing walls
INT: 100 mm AAC + plaster both faces (~5 in)

0' 5' 10' 20' feet


Door swings dashed. D = door, W = window (A-401).
Section lines and clear sizes on A-106; levels on A-108.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Ground floor plan**
Sheet	**A-102**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 64' used), road on east

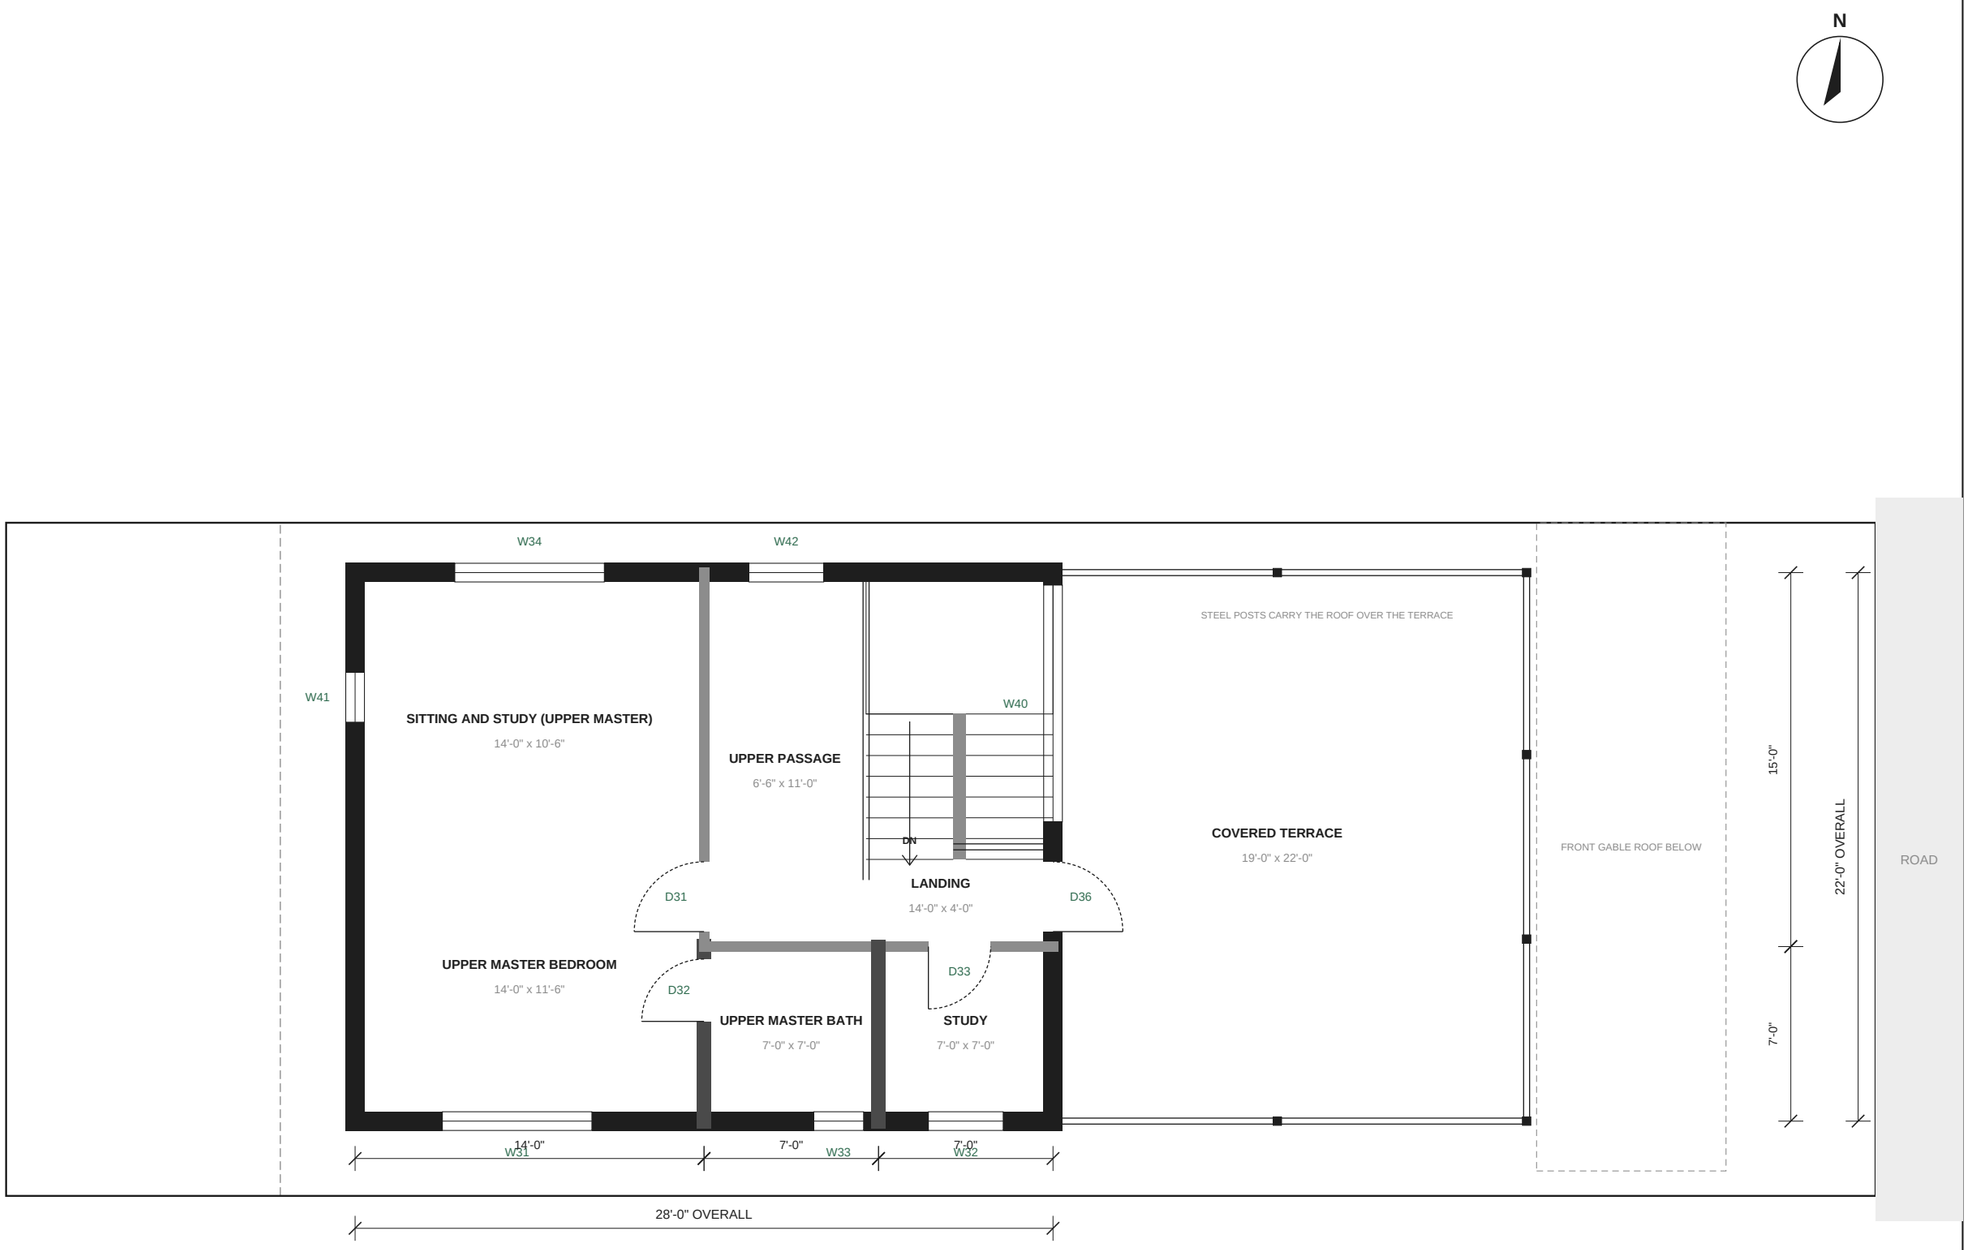

EXT: 200 mm AAC + 20 mm external plaster + 12 mm internal plaster (~9 in)
WET: 150 mm AAC + plaster both faces (~7 in): concealed plumbing walls
INT: 100 mm AAC + plaster both faces (~5 in)

0' 5' 10' 20' feet


Door swings dashed. D = door, W = window (A-401).
First floor at +12'-0". Railings 3'-6" high (double lines). The front half is a covered terrace under the main roof, on steel posts.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**First floor plan**
Sheet	**A-103**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 64' used), road on east

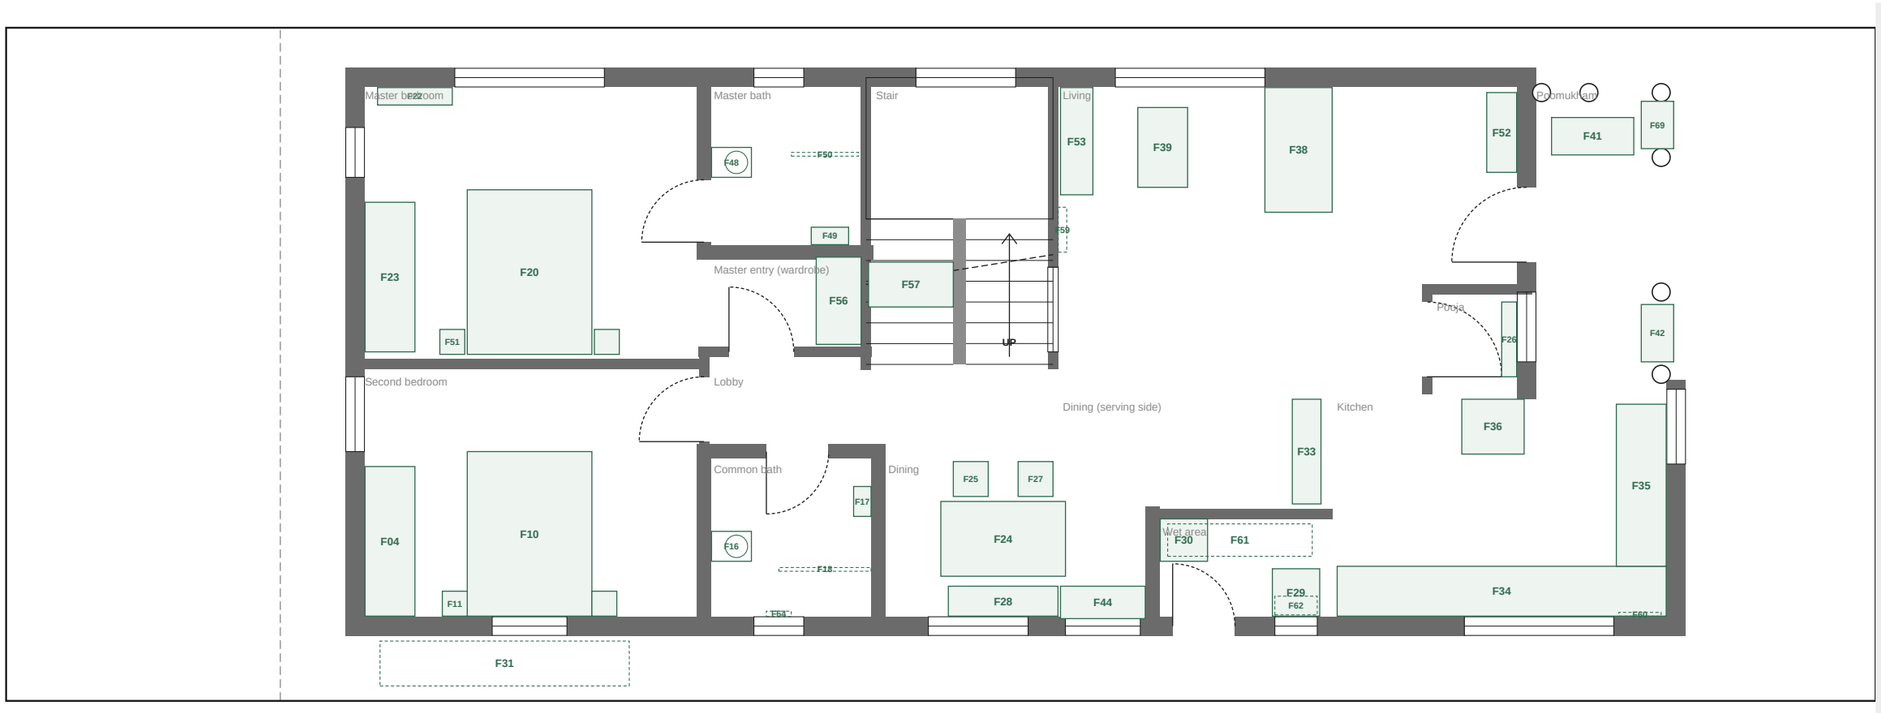



Furniture key (full specs in schedules)


F10	Queen bed 5' x 6'6" + headboard, head to the south wall
F11	Floating bedside shelf with a drawer, reading light and charging point above (x2)
F04	Built-in wardrobe 6' on the west wall, lofts above
F16	WC
F17	Wash basin with a mirror cabinet above
F18	Shower glass partition
F64	Recessed shower niche 1' x 1'-7" x 3 in deep, tiled, sloped sill
F20	Queen bed 5' x 6'6" + headboard, head to the south wall
F51	Floating bedside shelf with a drawer, reading light and charging point above (x2)
F23	Built-in wardrobe 6' with a mirror door
F22	Dresser with mirror
F57	Under-stair cupboard where the stair drops below 7 ft
F56	Wardrobe 4' in the entry, lofts above
F48	WC
F49	Wash basin with a mirror cabinet above
F50	Shower glass partition
F24	Dining table 5' x 3'
F25	Dining chair
F27	Dining chair
F28	Bench under the south window, storage below
F33	Granite serving ledge under the kitchen hatch
F44	Crockery unit under the south window, glass shutters
F29	Utility sink counter on the south wall, where vessels are washed
F62	Dish-drying rack over the utility sink
F30	Washing machine bay 2' x 2'
F61	Ceiling clothes airer on pulleys
F31	Fold-away clothesline in the south walkway behind the master
F34	L-counter, south run
F60	Utensil rail with hooks beside the hob
F35	L-counter, east run
F36	Refrigerator space on the north wall, clear of the entry door
F53	TV unit 4'-3" on the stair wall
F38	Sofa 5'
F39	Coffee table 3'2" x 2'
F59	Vilakku madam
F52	Shoe bench 3'-3"
F26	Pooja mandapam on the east wall
F41	Oonjal
F42	Charupadi
F69	Charupadi

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Furniture layout, ground floor**
Sheet	**A-104**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 64' used), road on east

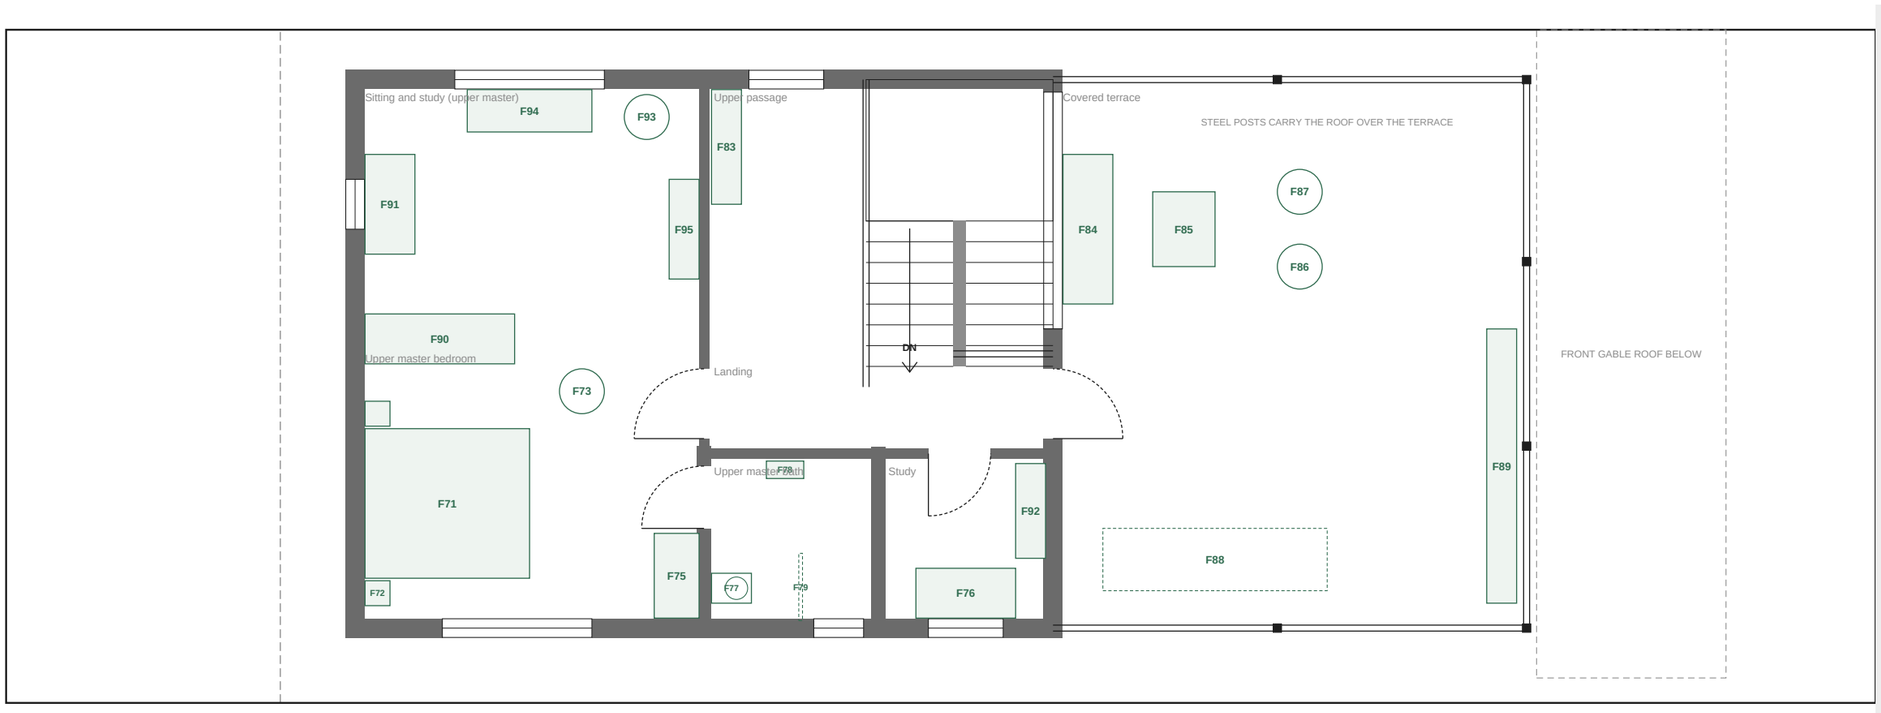

Furniture key (full specs in schedules)

F71	King bed 6' x 6'6" + headboard, head to the west wall
F72	Floating bedside shelf with a drawer, reading light and charging point above (x2)
F73	Reading chair by the divider wardrobe
F75	Built-in wardrobe 3'-5" on the east wall, lofts above
F76	Work desk 4' x 2' under the south window
F77	WC
F78	Wash basin with a mirror cabinet above
F79	Shower glass partition
F90	Built-in wardrobe 6' as a part divider between the sleeping and sitting zones, lofts above
F91	Work desk 4' x 2' on the west wall
F94	Window diwan 5' under the north window, drawers below
F93	Reading chair
F95	Open bookshelf on the passage wall
F92	Bookshelf on the east wall
F83	Open bookshelf at the end of the passage
F84	Built-in diwan 6' against the stair wall
F85	Low coffee table
F86	Cane armchair
F87	Cane armchair
F88	Clothes-drying rails hung from the steel frame
F89	Planter boxes along the east railing

0’ 5’ 10’ 20’ feet

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).


Stage	Draft for professional review (duplex option)
Drawing	**Furniture layout, first floor**
Sheet	**A-105**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 27' x 75' (front 64' used), road on east

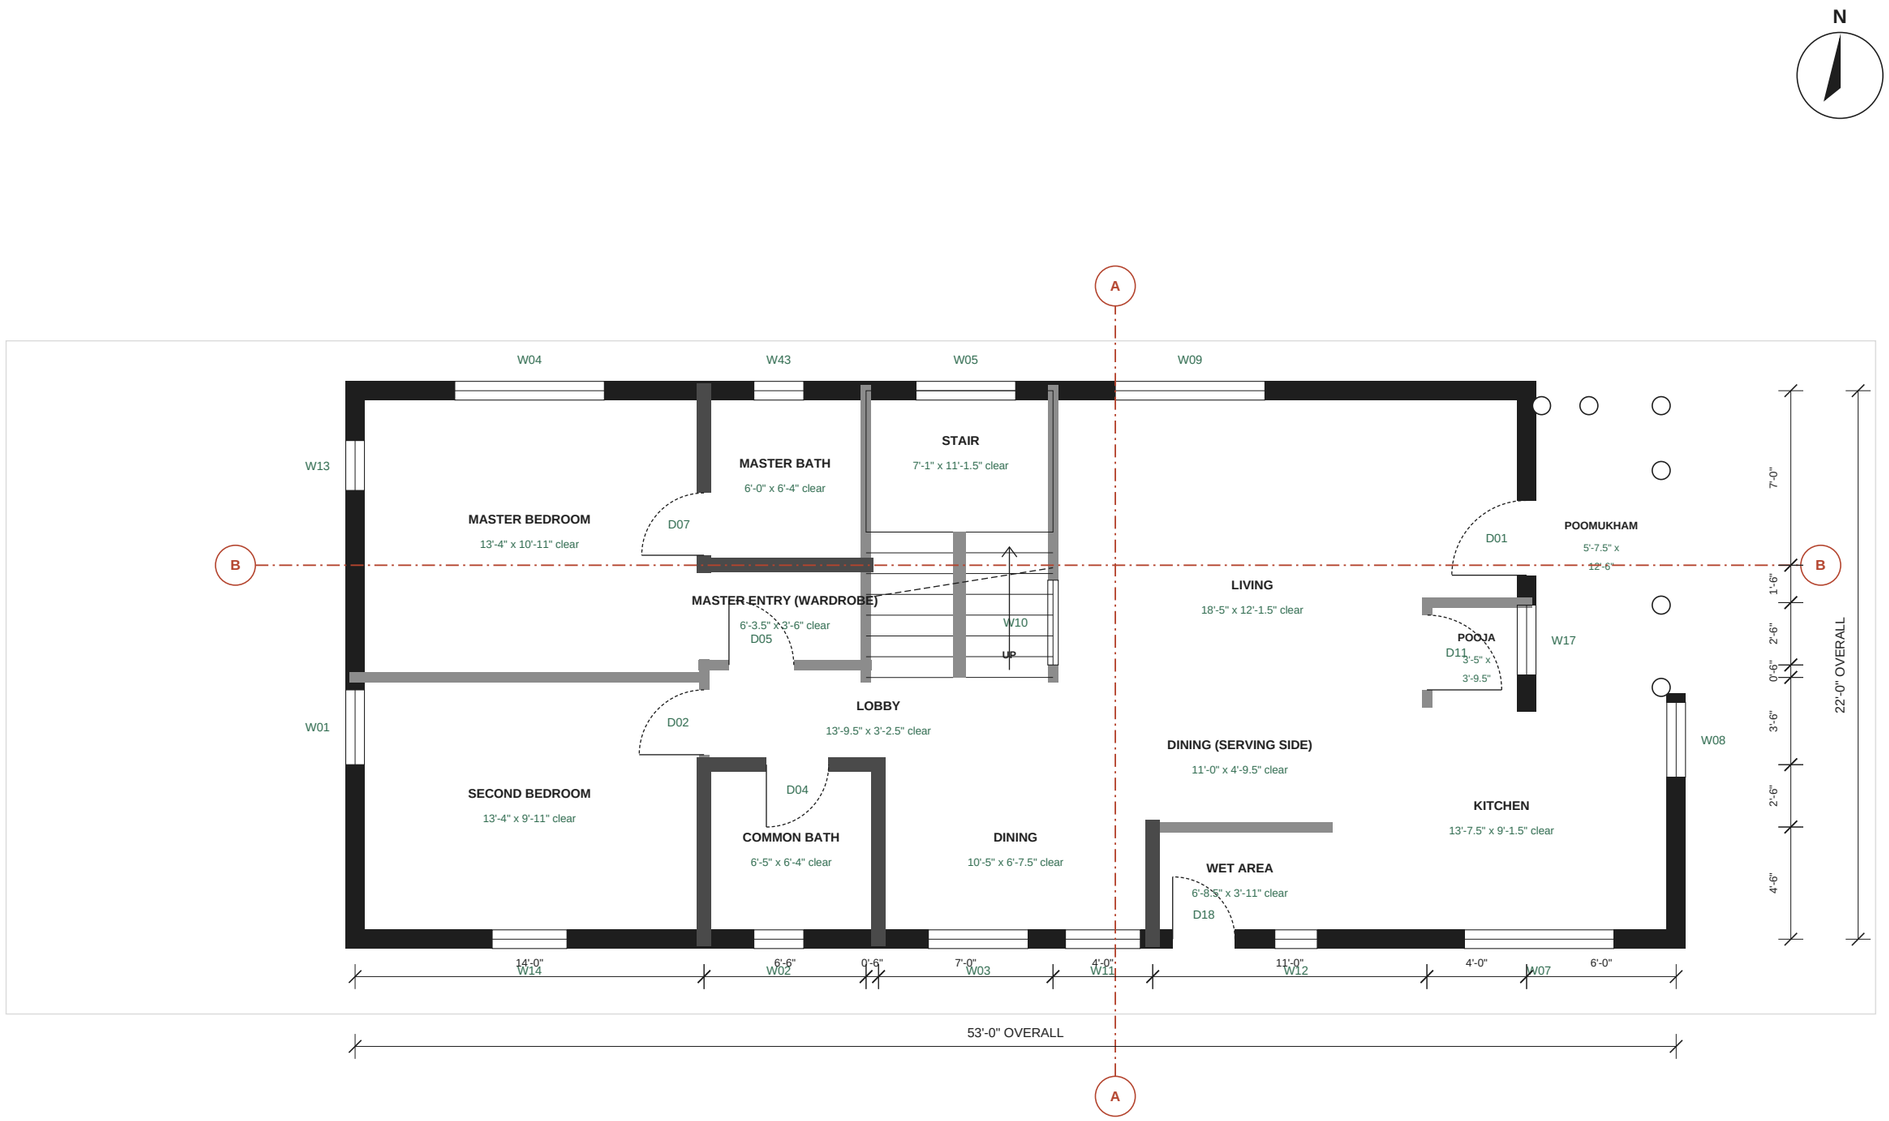

Clear sizes are wall face to wall face after plaster (green). Grid dimensions are to wall centrelines.

Sections A-A and B-B on A-301 (marked on the ground floor). Check every furniture item against the clear size before ordering.

Column positions (by engineer) must avoid door swings, wardrobes and the TV wall.




Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Working plan, ground floor: clear sizes and sections**
Sheet	**A-106**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 64' used), road on east

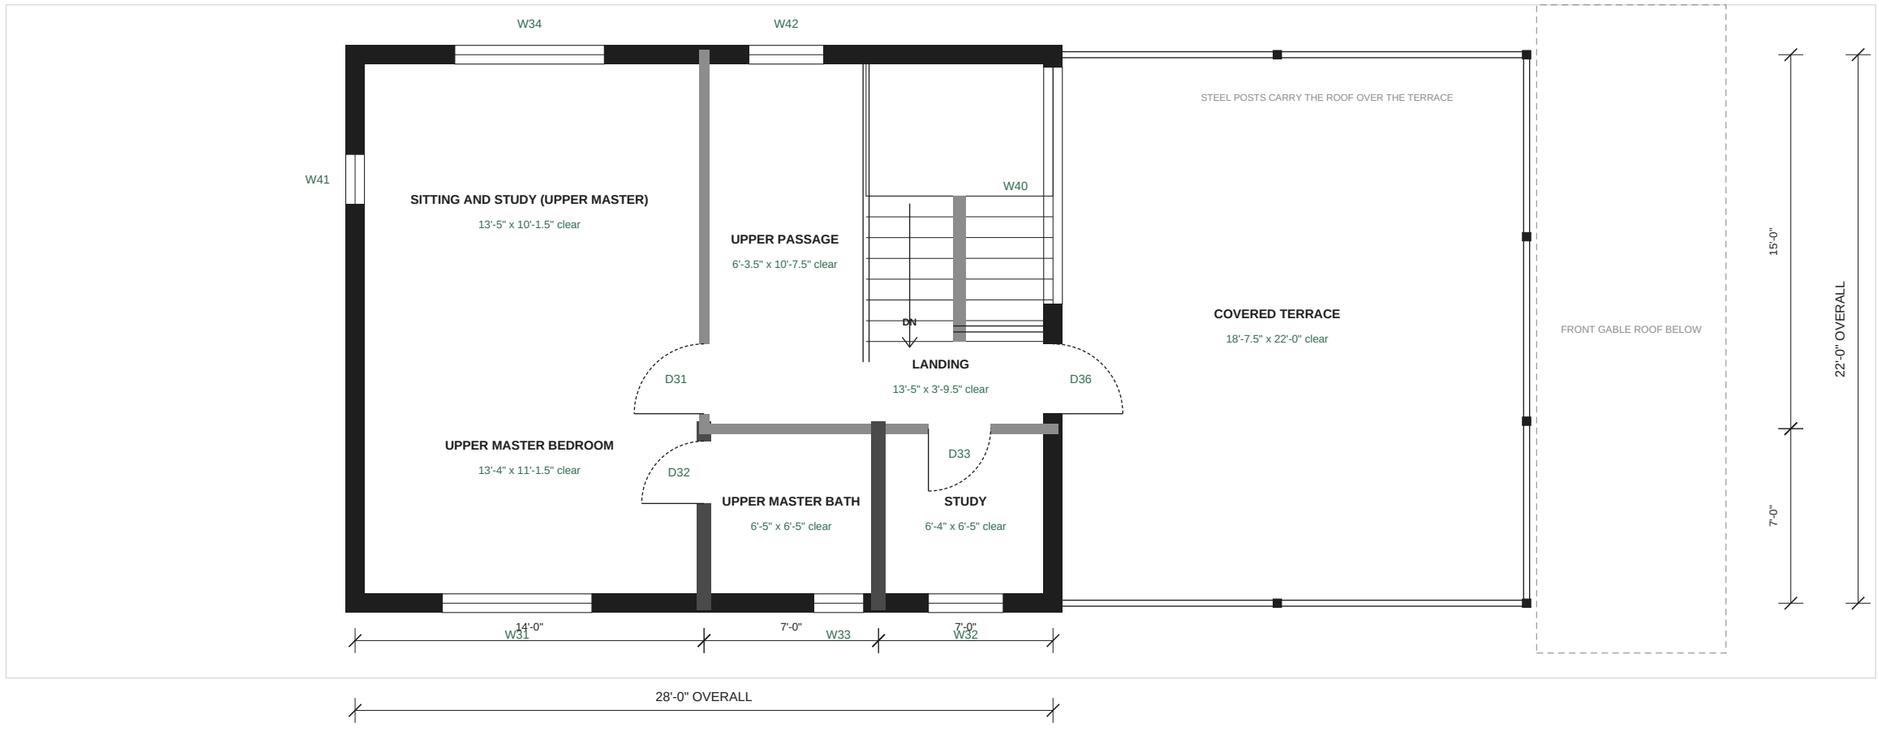

Clear sizes are wall face to wall face after plaster (green). Grid dimensions are to wall centrelines.

Sections A-A and B-B on A-301 (marked on the ground floor). Check every furniture item against the clear size before ordering.

Column positions (by engineer) must avoid door swings, wardrobes and the TV wall.




Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Working plan, first floor: clear sizes**
Sheet	**A-107**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 64' used), road on east

N

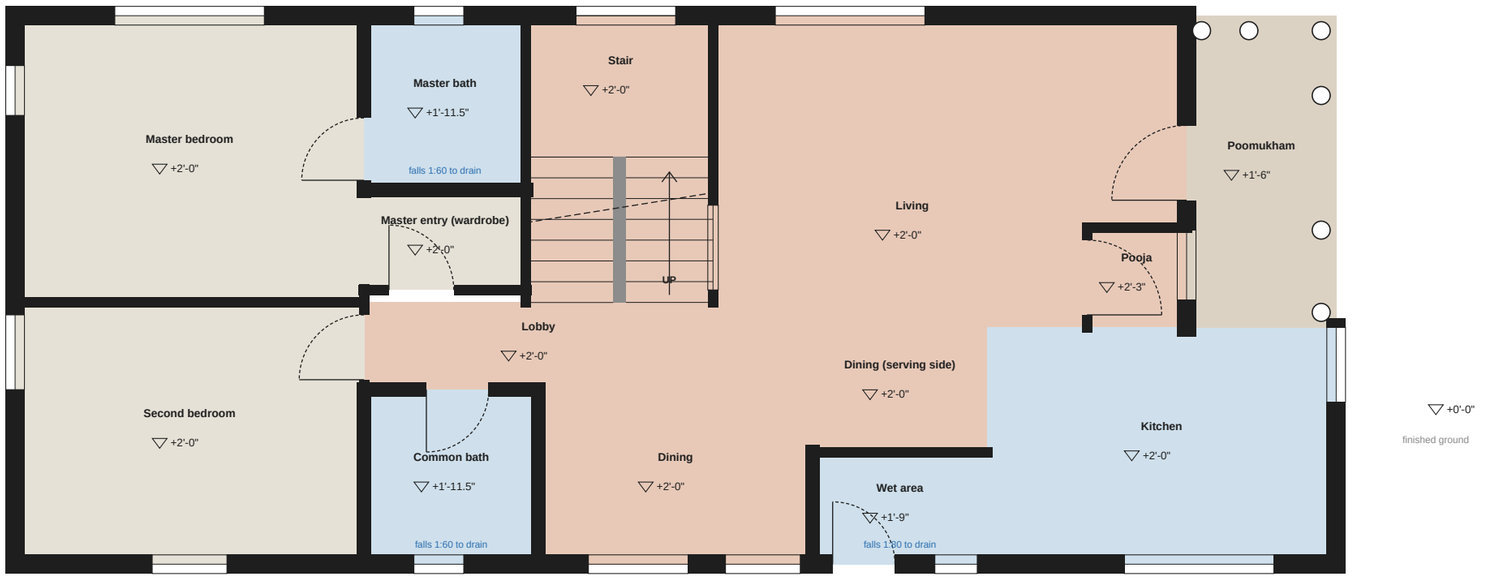

- Red oxide / Kota stone
- Matt vitrified 2x2
- Anti-skid ceramic, waterproofed
- Flamed granite
- Terracotta anti-skid tile, waterproofed

Floor detailing

- Skirting 4 in high, set flush with the plaster face (plaster stops in a groove above it), so no ledge collects dust.
- Bathrooms 12 mm below the bedroom floor with a sloped granite threshold: no raised step to trip on, water stays in.
- First floor: the upper bath and the covered terrace sit on the slab over ground-floor rooms: waterproof, flood-test 48 h, then tile.
- Shower zone: linear drain at the far end, floor falls 1:60 only inside the wet zone; dry zone floor nearly flat.
- Poomukham and steps: flamed or leather-finish stone. Polished granite is slippery when wet.
- Kitchen: mid-tone matt floor; white glossy tile shows every stain and is slippery with oil.
- Leave 5 mm expansion gaps at walls under the skirting and every 15-20 ft in large floors.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Floor finishes and levels, ground floor**
Sheet	**A-108**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 64' used), road on east

N



Red oxide / Kota stone
Matt vitrified 2x2
Anti-skid ceramic, waterproofed
Flamed granite
Terracotta anti-skid tile, waterproofed

Floor detailing


- Skirting 4 in high, set flush with the plaster face (plaster stops in a groove above it), so no ledge collects dust.
- Bathrooms 12 mm below the bedroom floor with a sloped granite threshold: no raised step to trip on, water stays in.
- First floor: the upper bath and the covered terrace sit on the slab over ground-floor rooms: waterproof, flood-test 48 h, then tile.
- Shower zone: linear drain at the far end, floor falls 1:60 only inside the wet zone; dry zone floor nearly flat.
- Poomukham and steps: flamed or leather-finish stone. Polished granite is slippery when wet.
- Kitchen: mid-tone matt floor; white glossy tile shows every stain and is slippery with oil.
- Leave 5 mm expansion gaps at walls under the skirting and every 15-20 ft in large floors.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Floor finishes and levels, first floor**
Sheet	**A-109**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 64' used), road on east

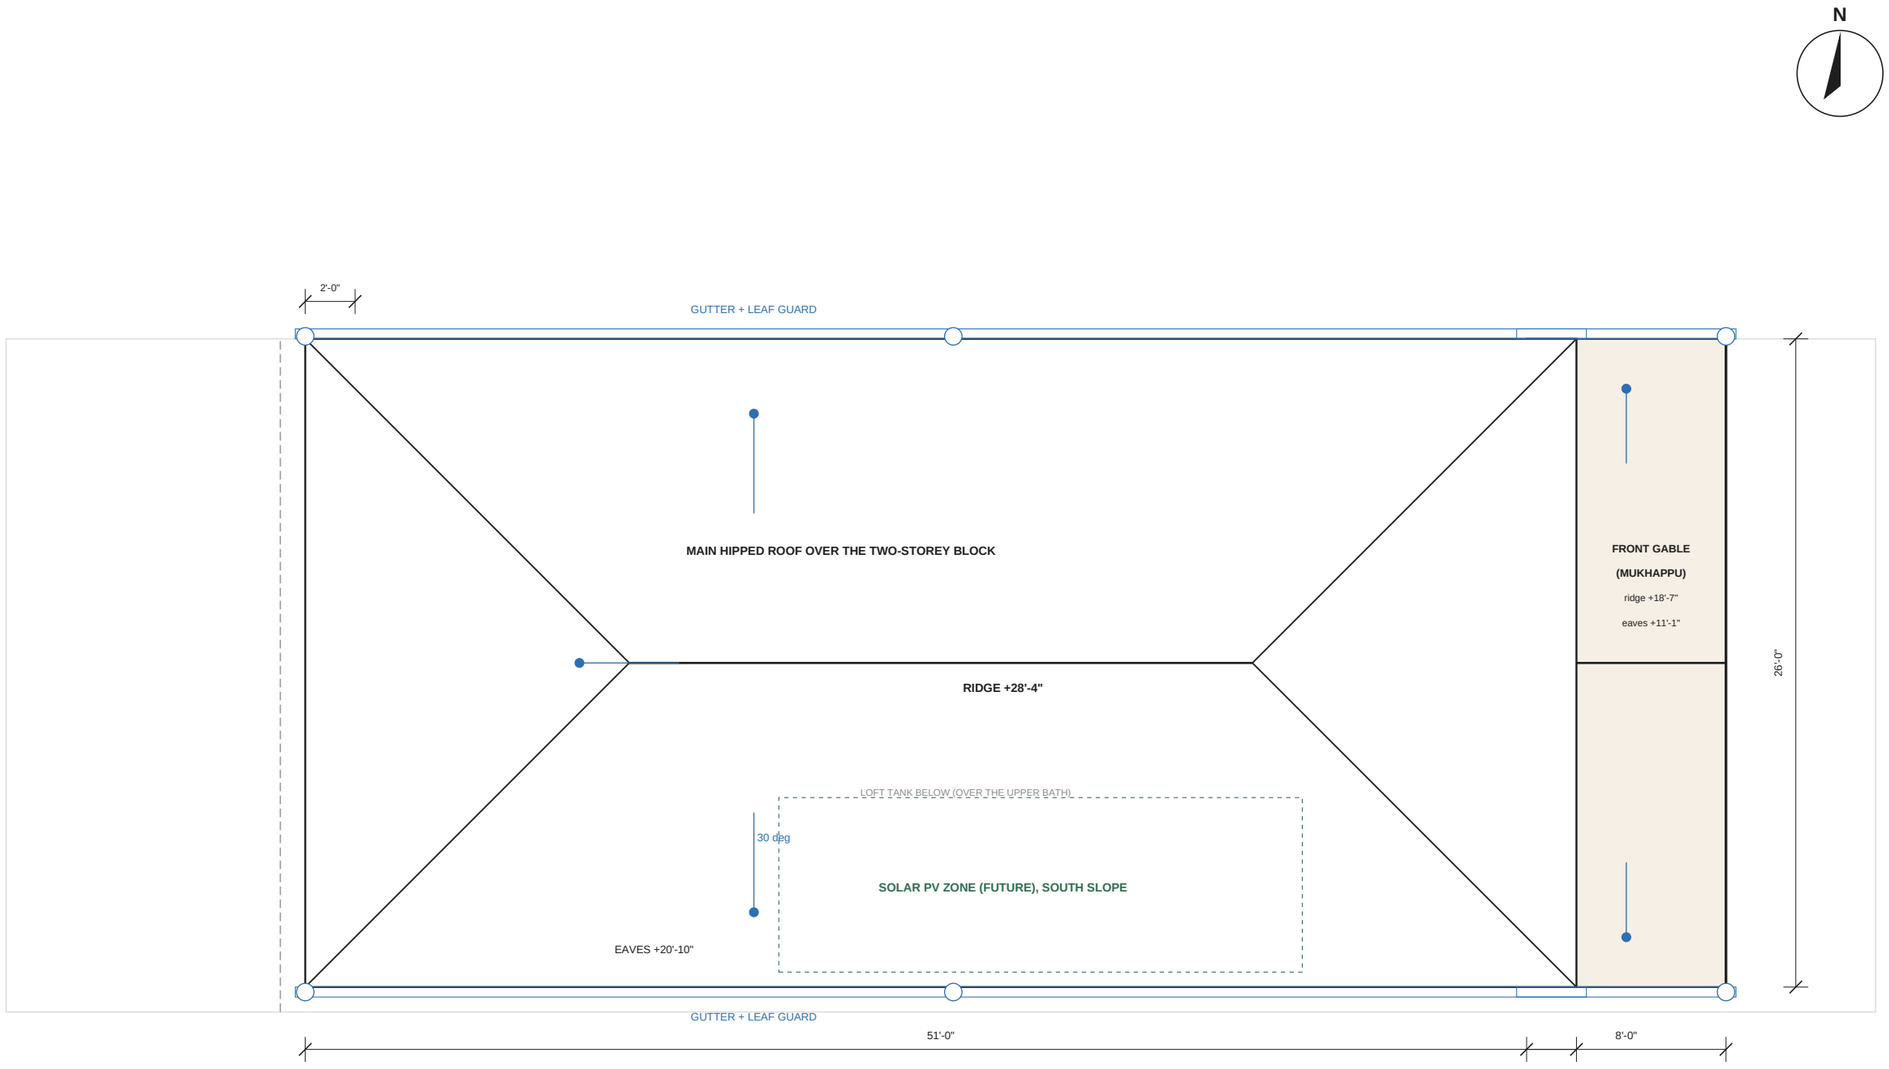


Roof detailing (Guntur: heat, cyclone wind, short heavy rain)

- Every tile along eaves, verges, hips and ridges clipped or screwed; every third row elsewhere. Cyclone winds lift loose tiles first at the edges, and the main roof is now 20 ft up.
- Main roof trusses bolted to the first-floor ring beam; front gable trusses to the ground-floor ring beam; purlins cleated, not just welded tacks.
- Where the front gable meets the east wall of the two-storey block: GI / aluminium apron flashing chased into the wall, with a counter-flashing; the main roof's east eave overhangs it by 2 ft.
- Eaves 2'-0" beyond the wall line (kept inside the 27 ft plot on the north) with drip edges and gutters on both roofs; downpipes at 6 points into the sump filter, overflow to the road drain.
- Over the covered terrace the main roof sits on galvanised steel posts and steel trusses instead of walls; same tiles and fixings. No ridge ventilator: hot air under the roof escapes at the terrace's open sides.
- Attic over the first-floor rooms vented at the ridge and soffits with insect mesh; 50 mm insulation on the deck. Loft water tank on a steel platform over the upper bath.
- Leave a 25 mm conduit from roof to DB now for future solar PV on the south slope.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Roof plan**
Sheet	**A-110**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

NORTH ELEVATION

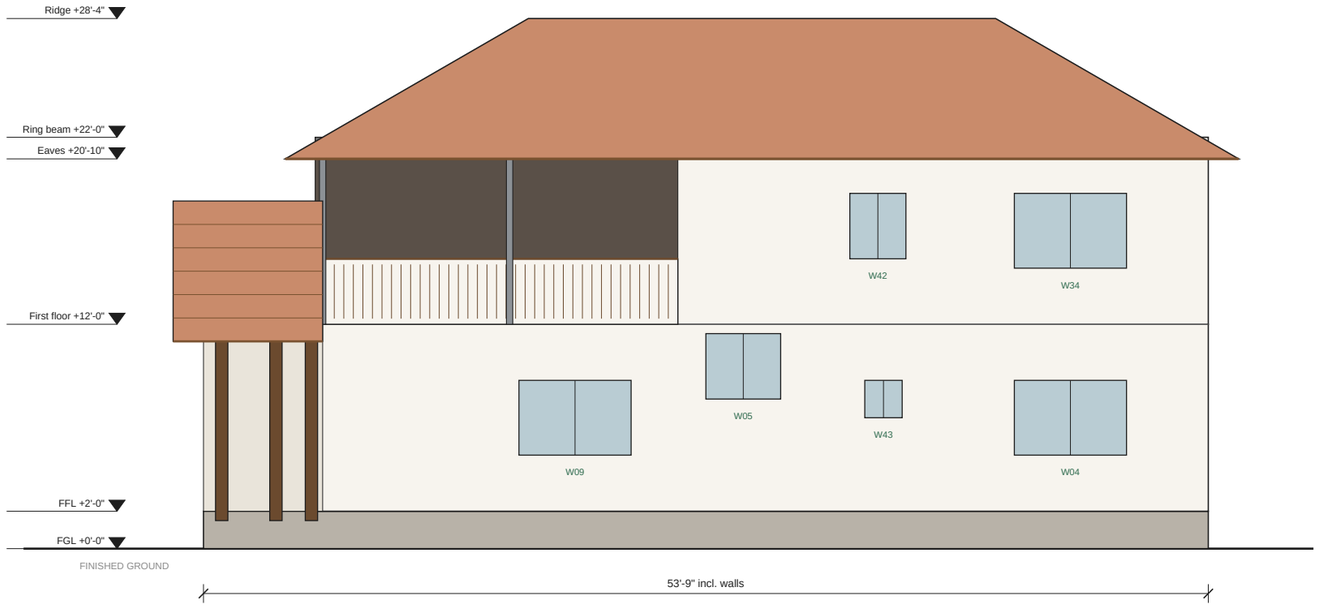

SOUTH ELEVATION



Two-tier roof: the main hipped roof over the two-storey block (on steel posts over the covered terrace), the low front gable over the verandah and kitchen front. Brown line = fascia with gutter.

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)


Guntur, Andhra Pradesh

Plot 27' x 75' (front 64' used), road on east


Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**North and south elevations**
Sheet	**A-201**
Scale	1:100 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

EAST ELEVATION (ROAD SIDE)

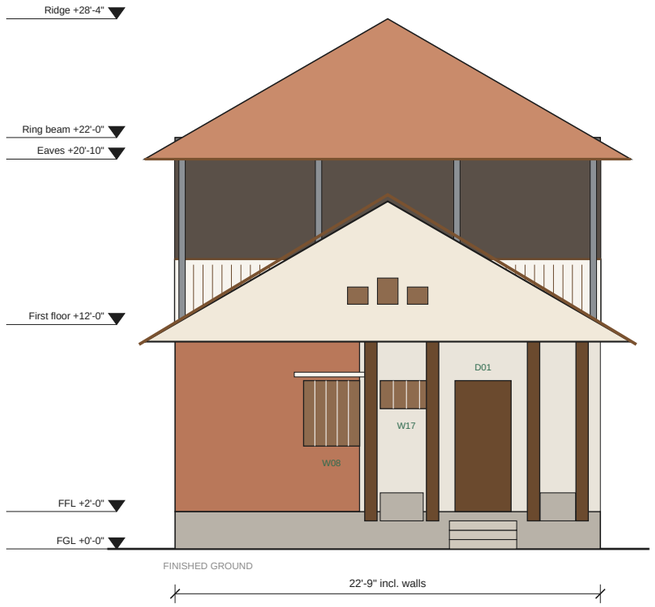

WEST ELEVATION

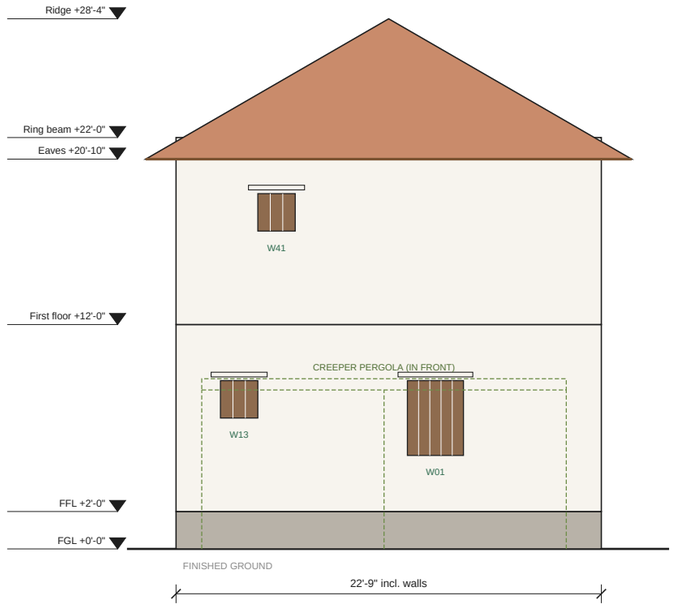

- Front gable (mukhappu) over the verandah and kitchen front; the covered terrace sits 6 ft back behind it, open behind a railing under the main roof on slim steel posts.
- Plinth face clad 2 ft in rough stone: the splash zone stays clean and does not erode.
- West wall: the upper master's west wall is solid (afternoon sun); the sitting zone above the ground master has only a small high vent on the west. The creeper pergola shades the ground floor.
- Entrance: 3 risers of 6 in, 12 in treads, flamed granite with a nosing; foot-wash tap beside the steps.


Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 64' used), road on east


Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**East (road) and west elevations**
Sheet	**A-202**
Scale	1:100 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

SECTION B-B: LONG SECTION THROUGH THE GROUND MASTER AND THE UPPER SITTING ZONE ABOVE, THE STAIR, THE LIVING WITH THE COVERED TERRACE ABOVE, AND THE POOMUKHAM

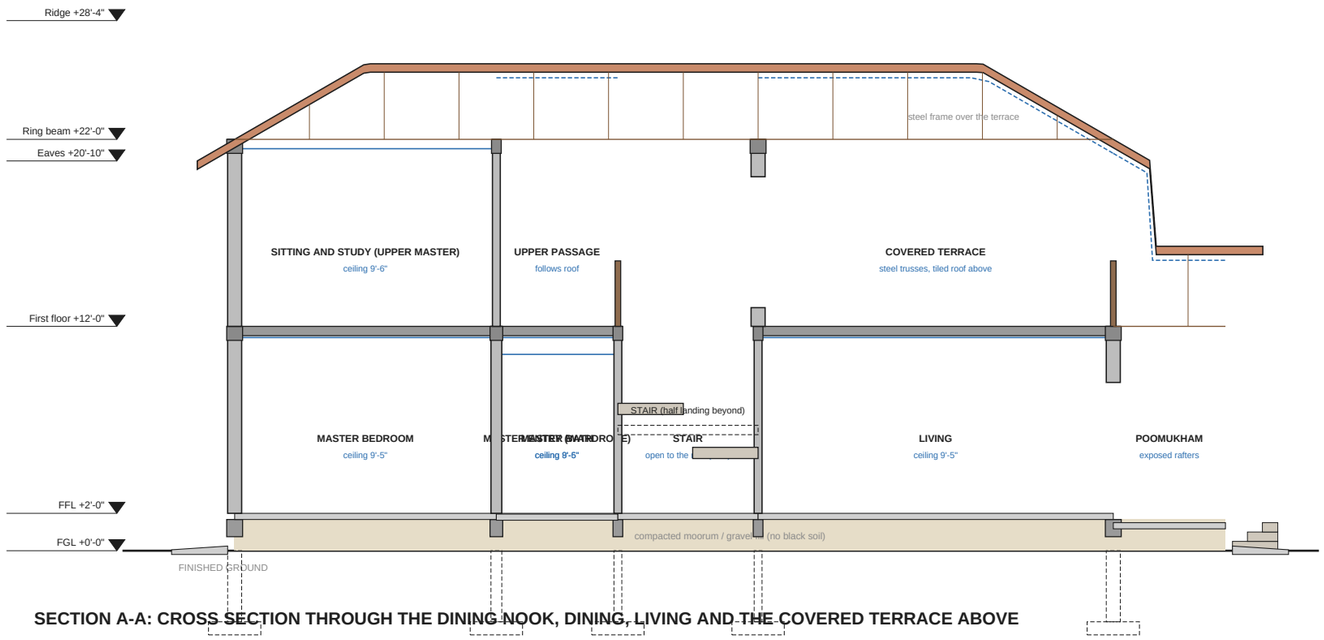

SECTION A-A: CROSS SECTION THROUGH THE DINING NOOK, DINING, LIVING AND THE COVERED TERRACE ABOVE

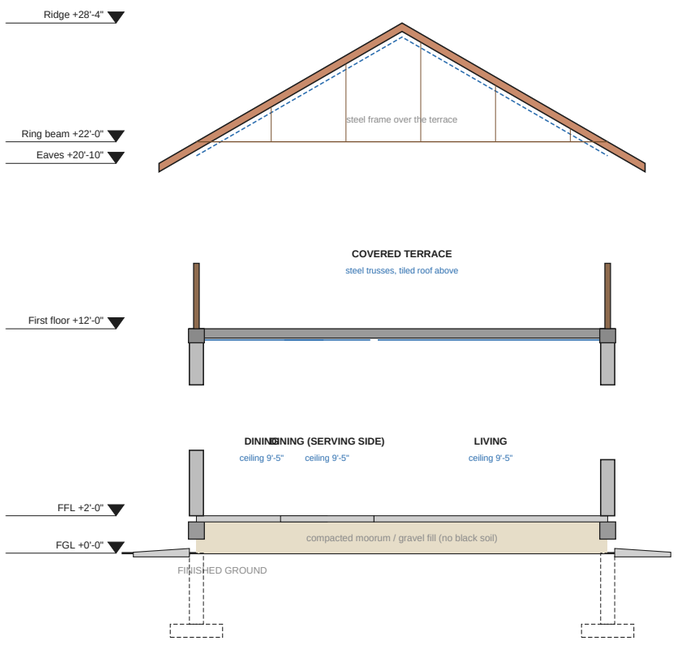

Section notes

- Clay tiles on battens, membrane, 50 mm insulation, cement-fibre deck on purlins (attic over the first-floor rooms ventilated at ridge and soffit).
- Main roof trusses bolted to the first-floor ring beam; front gable trusses to the ground-floor ring beam (cyclone uplift).
- First-floor RCC slab over the whole two-storey block; over the front half it is the covered terrace, waterproofed, under the main roof on galvanised steel posts and steel trusses.
- RCC lintel band at door-head level on both floors (seismic zone III). AAC walls in an RCC frame; mesh over every block-to-concrete joint.
- Ground-floor rooms have a plastered slab soffit at about 9'-5" (blue); first-floor rooms have insulated false ceilings; the stair and terrace are open to the roof.
- Dog-leg stair, 17 risers of about 7 in; teak handrail; timber jali to the living and to the terrace.
- Plinth beam with DPC; plinth fill of compacted moorum, never black soil; anti-termite treatment at every layer.
- Footings dashed and indicative only: type and depth by the engineer after the soil test (two-storey loads).

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 64' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).


Stage	Draft for professional review (duplex option)
Drawing	**Sections A-A and B-B**
Sheet	**A-301**
Scale	1:100 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

DOORS (viewed from the side the door swings into; vents above inner doors, 7'-6" to 9'-0"; none at bedrooms or bathrooms)




D01	D02	D04	D05	D07	D11	D12	D17	D18	D31	D32	D33	D36
3'-0" x 7'-0"	2'-7" x 7'-0"	2'-6" x 7'-0"	2'-7" x 7'-0"	2'-6" x 7'-0"	3'-0" x 7'-0"	2'-6" x 7'-0"	2'-6" x 7'-0"	2'-6" x 7'-0"	2'-9.5" x 7'-0"	2'-6" x 7'-0"	2'-6" x 7'-0"	2'-9.5" x 7'-0"
Teak, double leaf, panelled; 4 in raised threshold outside slope; tower bolts + mortise lock	MS frame + grill shutter outside, mesh door inside; 1 in weather bar	Flush, waterproof (WPC/FRP), door closer	WPC/FRP shutter, frame on granite base; louvre at bottom	Flush, waterproof (WPC/FRP)	Carved teak, double leaf (opens inward, clear of the living; faces west, family faces east) *Above: open jali*	WPC/FRP shutter, frame on granite base	Teak frame, glazed sliding door, 2'-6" (closes off cooking smoke)	Steel, lockable, louvred top	Flush, teak veneer	Flush, waterproof (WPC/FRP)	Flush, teak veneer	Teak frame, glazed, 3 ft

WINDOWS, GROUND FLOOR (viewed from inside; sill and head heights above the floor)

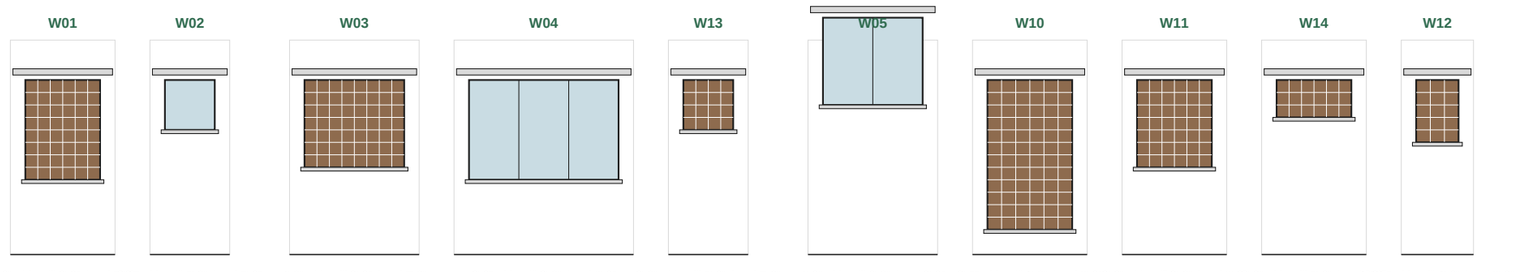

W01	W02	W03	W04	W13	W05	W10	W11	W14	W12
3'-0" wide, sill 3'-0", head 7'-0"	2'-0" wide, sill 5'-0", head 7'-0"	4'-0" wide, sill 3'-6", head 7'-0"	6'-0" wide, sill 3'-0", head 7'-0"	2'-0" wide, sill 5'-0", head 7'-0"	4'-0" wide, sill 6'-0", head 9'-6"	3'-5" wide, sill 1'-0", head 7'-0"	3'-0" wide, sill 3'-6", head 7'-0"	3'-0" wide, sill 5'-6", head 7'-0"	1'-8.5" wide, sill 4'-6", head 7'-0"
Timber jali + glazed shutters (west, shaded by the creeper pergola)	Frosted casement, top-hung vent	Timber jali + glazed shutters (4 ft, south light over the table)	Teak casement, glazed (6 ft)	High jali vent (west, cross-ventilation)	Glazed casement at the half landing	Timber jali screen between the stair foot and the living	Timber jali + glazed shutters (3 ft, over the crockery unit)	High jali + glazed shutters above the bed head (morning light, cross-breeze with the west window)	Jali vent over the utility sink

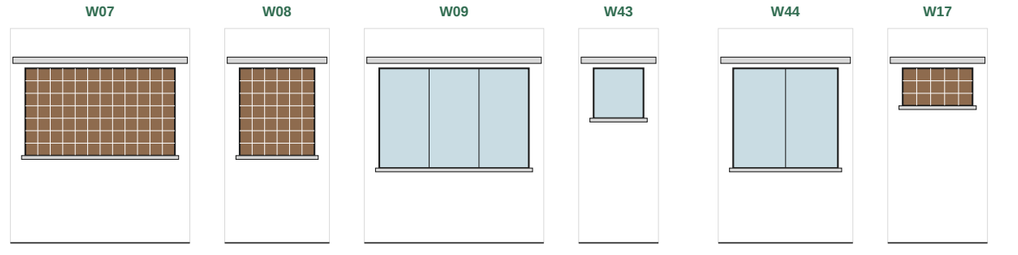

W07	W08	W09	W43	W44	W17
6'-0" wide, sill 3'-6", head 7'-0"	3'-0" wide, sill 3'-6", head 7'-0"	6'-0" wide, sill 3'-0", head 7'-0"	2'-0" wide, sill 5'-0", head 7'-0"	4'-2.5" wide, sill 3'-0", head 7'-0"	2'-9.5" wide, sill 5'-6", head 7'-0"
Timber jali + glazed shutters	Timber jali + glazed shutters (3 ft, north end; hob wall kept solid)	Teak casement, glazed (6 ft)	Frosted casement, top-hung vent	Serving hatch over a granite counter, glazed sliding shutters (close while cooking)	High vent to the poomukham, jali + mesh (lamp smoke out)

- All windows: insect mesh (SS or fibreglass) on a separate openable or sliding frame, so glass can be cleaned.
- MS safety grill inside the shutters on every ground-floor window; one escape window per bedroom with an openable grill section.
- Teak is costly and must be seasoned; good alternatives in Guntur: sal or hard pinkado for frames, UPVC for wet-side windows.
- Door frames 5 x 2.5 in; frames in bathrooms and wet areas stand on granite or WPC blocks, never touching the wet floor.
- Hardware: SS 304 hinges and screws (hard water and humidity rust MS); magnetic door stoppers on every door.
- Sunshade (chajja) over every window projects 1'-6" to 2'-0" with a drip groove under the front edge.

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh


Plot 27' x 75' (front 64' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Door details and ground-floor windows**
Sheet	**A-401**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

WINDOWS, FIRST FLOOR (viewed from inside; sill and head heights above the first floor)


W31



6'-0" wide, sill 3'-0", head 7'-0"

Timber jali + glazed shutters


W32



3'-0" wide, sill 3'-0", head 7'-0"

Timber jali + glazed shutters (3 ft, over the desk)


W33



2'-0" wide, sill 5'-0", head 7'-0"

Frosted casement, top-hung vent


W34



6'-0" wide, sill 3'-0", head 7'-0"

Teak casement, glazed (6 ft, north light for the desk and reading)


W41



2'-0" wide, sill 5'-0", head 7'-0"

High jali vent (west, cross-ventilation)


W40

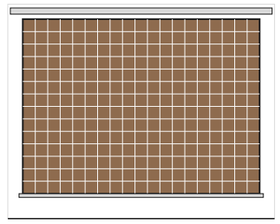

9'-6" wide, sill 1'-0", head 8'-0"

Timber jali screen between the stair well and the covered terrace (light and air for the stair)

W42



3'-0" wide, sill 3'-6", head 7'-0"

Teak casement, glazed (3 ft, north light for the reading nook)

- The stair-well jali (W40) faces the covered terrace: light and air for the stair, no glass to clean.
- The terrace door (D36) off the landing is glazed teak, opening outward with a weather bar.
- Upper windows sit under the main roof's 2 ft eave; sunshades only on the south windows.

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)


Guntur, Andhra Pradesh

Plot 27' x 75' (front 64' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).


Stage	Draft for professional review (duplex option)
Drawing	**Window details, first floor**
Sheet	**A-402**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

1 Plinth, DPC, floor and apron

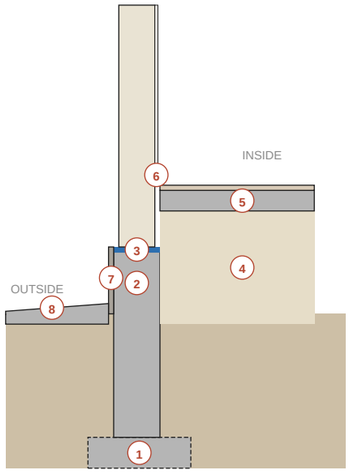


1 Footing by engineer after soil test; on black cotton soil often 1.5-2.5 m deep or under-reamed piles.
2 RCC plinth beam ties all columns; 75 mm sand cushion under it on expansive soil.
3 DPC 40 mm with waterproof compound at plinth top, under the first AAC course.
4 Moorum / gravel fill compacted in 150 mm layers; anti-termite treatment at each layer.
5 PCC bed 100 mm with polythene sheet, then screed and tile.
6 Skirting 4 in, flush with plaster face (plaster stops in a groove): no dust ledge.
7 Stone cladding on the plinth face to 2 ft: rain splash zone stays clean.
8 3 ft PCC apron sloping 1:30 away; polysulphide joint at the wall so water never reaches the foundation.

2 Flush skirting at floor-wall joint

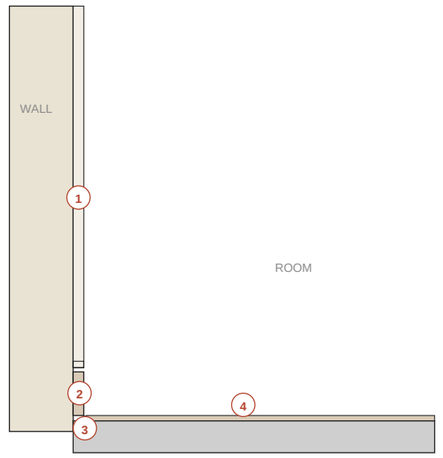


1 Plaster stops 1/4 in above skirting in a clean groove.
2 Skirting tile 4 in high set in the plaster line, face flush with the wall.
3 5 mm gap filled with silicone / PU sealant: allows movement, no cracked tiles.
4 In wet rooms use a cove tile or wall tile down to the floor with epoxy grout instead.

3 Window sill, frame and sunshade

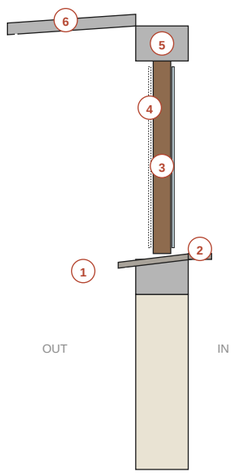

1 External sill slopes out 1:10 and projects 2 in past the plaster with a drip groove underneath.
2 Internal sill in stone, 1/2 in higher than the outer sill (water cannot run inward).
3 Frame on a bed of sealant; gap to wall filled with PU foam and sealed both sides.
4 Insect mesh on a separate openable frame.
5 RCC lintel band continuous around the house at door-head level.
6 Sunshade 1'-6" to 2'-0", top sloped out, drip groove under the front edge (no black streaks on walls).

4 Eaves, gutter and roof build-up

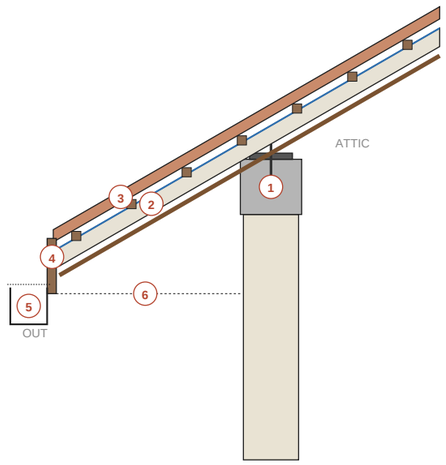

1 RCC ring beam with holding-down bolts cast in; truss shoe bolted, not just welded.
2 Cement-fibre deck + 50 mm insulation + breathable membrane under the battens.
3 Mangalore tiles; eave, verge, hip and ridge tiles clipped or screwed (cyclone wind).
4 Fascia board with drip edge flashing into the gutter.
5 150 mm gutter with leaf guard, falls 1:300 to downpipes.
6 Ventilated soffit with insect / bird mesh: hot attic air escapes at the ridge.


Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 64' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).


Stage	Draft for professional review (duplex option)
Drawing	**Typical details 1: plinth, floor, window, eaves**
Sheet	**A-501**
Scale	NTS
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

5 Bathroom: wet and dry zones

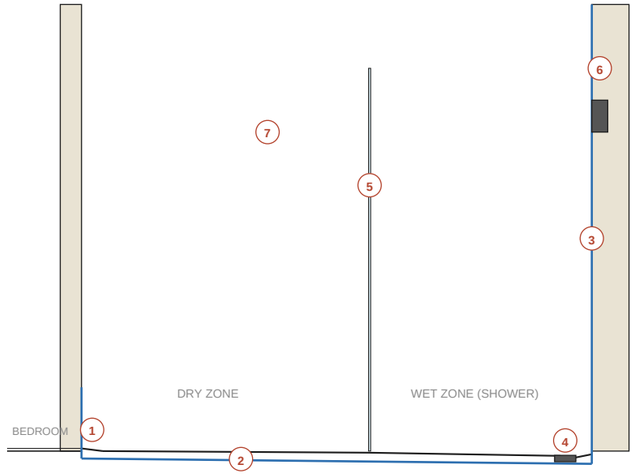


1 Bathroom 12 mm below the bedroom floor with a sloped granite threshold: no raised step to trip on.
2 Waterproof membrane across the floor and 12 in up all walls; 48 h flood test before tiling.
3 Shower walls waterproofed to 7 ft; tiles to ceiling in the shower, 7 ft elsewhere.
4 Linear drain at the far wall; only the wet zone falls (1:60). Dry zone stays dry and safe.
5 8 mm toughened glass partition, 6 in clear of the floor drain line; matt fittings hide hard-water marks.
6 Concealed diverter and pipes in the 7 in wet wall; isolation valve outside the bathroom.
7 Exhaust fan high on the outer wall, opposite the door, ducted outside (not into the attic).

6 Kitchen counter and chimney

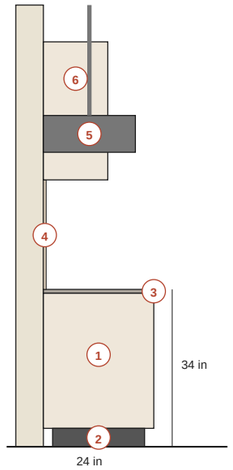


1 Counter top at 34 in (865 mm) for standing cooking; 30-31 in section for a chapati / grinding area.
2 Base units on 4 in legs or a granite plinth: floor can be mopped, no termites, no water damage.
3 20 mm granite (local Chimakurthy / Ongole) with a drip edge; sink under the window, hob on the east run.
4 Stone or tile between counter and wall cabinets, full height; no painted wall behind the hob.
5 Chimney 26-30 in above the hob, ducted straight out through the wall (no long bends).
6 Wall cabinets 14 in deep, starting 22-24 in above the counter; plenty of 16 A sockets at 42 in.

7 Hand-wash basin (serving counter)

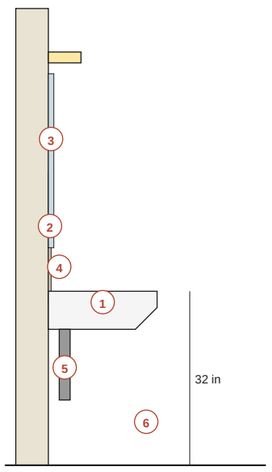


1 Wall-hung basin, rim at 32 in (810 mm); bottle trap, so the floor below can be cleaned.
2 Tiled or stone splash-back 2 ft above the basin: painted walls stain and peel here.
3 Mirror from 40 in to 72 in, light above (not behind) the mirror, socket at 42 in kept 2 ft from the tap.
4 Soap / shelf niche recessed into the wall, sloped forward so water does not pool.
5 Waste pipe into the wall, not across the floor; a floor trap is not needed for a dining-area basin.
6 Children: keep a fold-down step; tap with a long spout so water lands in the bowl, not on the counter.

8 AAC wall joints and chases

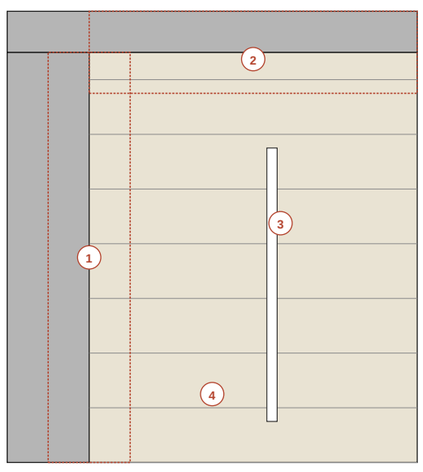

1 Galvanised mesh 150 mm wide, centred on every AAC-to-column and AAC-to-beam joint, before plaster.
2 Top course: 20 mm gap under the beam packed with PU foam / flexible filler, not rigid mortar.
3 Chases cut with a wall chaser, max 1/3 of block depth; refill with polymer mortar + mesh.
4 Thin-bed polymer mortar 3 mm, blocks laid dry; first course on the DPC in normal mortar to level.

9 Door thresholds and rain kerbs

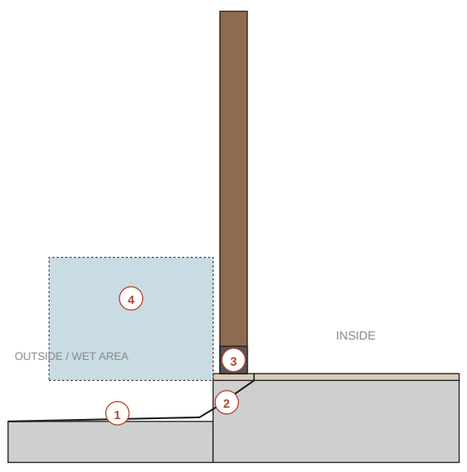

1 Outside floor 3-6 in lower than inside and sloping away 1:50: rain never flows in.
2 Granite threshold with a 1 in upstand / weather bar under external doors.
3 Wet-area door frames stand on a granite or WPC block; wood never touches a wet floor.
4 Open wet area: floor 3 in lower and sloping out to the walkway, so rain drains away from the kitchen door.

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 64' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Typical details 2: bath, kitchen, basin, AAC**
Sheet	**A-502**
Scale	NTS
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Room schedule

ID	Room	Centreline	Clear	Area sq ft (clear)
	Ground floor			
R01	Second bedroom	14'-0" x 10'-6"	13'-4" x 9'-11"	132
R03	Common bath	7'-0" x 7'-0"	6'-5" x 6'-4"	41
R04	Master bedroom	14'-0" x 11'-6"	13'-4" x 10'-11"	146
R05	Lobby	14'-0" x 3'-6"	13'-9.5" x 3'-2.5"	44
R14	Master entry (wardrobe)	6'-6" x 4'-0"	6'-3.5" x 3'-6"	22
R07	Master bath	6'-6" x 7'-0"	6'-0" x 6'-4"	38
R06	Stair	7'-6" x 11'-6"	7'-1" x 11'-1.5"	79
R12	Dining	11'-0" x 7'-0"	10'-5" x 6'-7.5"	69
R13	Wet area	7'-0" x 4'-6"	6'-8.5" x 3'-11"	26
R10	Dining (serving side)	11'-0" x 5'-0"	11'-0" x 4'-9.5"	53
R15	Kitchen	14'-0" x 9'-6"	13'-7.5" x 9'-1.5"	124
R16	Living	19'-0" x 12'-6"	18'-5" x 12'-1.5"	223
R11	Pooja	4'-0" x 4'-0"	3'-5" x 3'-9.5"	13
R17	Poomukham (verandah)	6'-0" x 12'-6"	5'-7.5" x 12'-6"	70
	First floor			
R31	Upper master bedroom	14'-0" x 11'-6"	13'-4" x 11'-1.5"	148
R33	Upper master bath	7'-0" x 7'-0"	6'-5" x 6'-5"	41
R32	Study	7'-0" x 7'-0"	6'-4" x 6'-5"	41
R34	Landing	14'-0" x 4'-0"	13'-5" x 3'-9.5"	51
R35	Upper passage	6'-6" x 11'-0"	6'-3.5" x 10'-7.5"	67
R36	Sitting and study (upper master)	14'-0" x 10'-6"	13'-5" x 10'-1.5"	136
R37	Covered terrace	19'-0" x 22'-0"	18'-7.5" x 22'-0"	410
	Total (clear, both floors)			1974

Door schedule (heights 7'-0"; vents 7'-6" to 9'-0")

ID	Location	Width	Type	Vent above
D01	Main entrance (centred under the front gable)	3'-0"	Teak panelled, double leaf	-
D02	Second bedroom (from the lobby)	2'-7"	Flush, teak veneer	-
D04	Common bath (from the lobby, opens inward so it never blocks the lobby)	2'-6"	Flush, waterproof (WPC/FRP), door closer	-
D05	Master bedroom (from the lobby, into its entry)	2'-7"	Flush, teak veneer	-
D07	Master bath (west wall, straight from the master bedroom, opens outward)	2'-6"	Flush, waterproof (WPC/FRP)	-
D11	Pooja	3'-0"	Carved teak, double leaf (opens inward, clear of the living; faces west, family faces east)	Open jali
D12	Kitchen to wet area (sliding)	2'-6"	Steel or WPC sliding, lockable	-
D17	Kitchen entry from the living (sliding)	2'-6"	Teak frame, glazed sliding door, 2'-6" (closes off cooking smoke)	-
D18	Wet area service door to the south walkway (opens inward)	2'-6"	Steel, lockable, louvred top	-
D31	Upper master bedroom (from the landing)	2'-9.5"	Flush, teak veneer	-
D32	Upper master bath (from the bedroom, opens outward)	2'-6"	Flush, waterproof (WPC/FRP)	-
D33	Study (from the landing)	2'-6"	Flush, teak veneer	-
D36	Covered terrace (from the landing, opens outward)	2'-9.5"	Teak frame, glazed, 3 ft	-

Window and vent schedule (sill/head above floor)

ID	Room	Wall	Width	Sill	Head	Type
W01	Second bedroom	W	3'-0"	3'-0"	7'-0"	Timber jali + glazed shutters (west, shaded by the creeper pergola)
W02	Common bath	S	2'-0"	5'-0"	7'-0"	Frosted casement, top-hung vent
W03	Dining	S	4'-0"	3'-6"	7'-0"	Timber jali + glazed shutters (4 ft, south light over the table)
W04	Master bedroom	N	6'-0"	3'-0"	7'-0"	Teak casement, glazed (6 ft)
W13	Master bedroom	W	2'-0"	5'-0"	7'-0"	High jali vent (west, cross-ventilation)
W05	Stair	N	4'-0"	6'-0"	9'-6"	Glazed casement at the half landing
W10	Stair	In	3'-5"	1'-0"	7'-0"	Timber jali screen between the stair foot and the living
W11	Dining	S	3'-0"	3'-6"	7'-0"	Timber jali + glazed shutters (3 ft, over the crockery unit)
W14	Second bedroom	S	3'-0"	5'-6"	7'-0"	High jali + glazed shutters above the bed head (morning light, cross-breeze with the west window)
W12	Wet area	S	1'-8.5"	4'-6"	7'-0"	Jali vent over the utility sink
W07	Kitchen	S	6'-0"	3'-6"	7'-0"	Timber jali + glazed shutters
W08	Kitchen	E	3'-0"	3'-6"	7'-0"	Timber jali + glazed shutters (3 ft, north end; hob wall kept solid)
W09	Living	N	6'-0"	3'-0"	7'-0"	Teak casement, glazed (6 ft)
W43	Master bath	N	2'-0"	5'-0"	7'-0"	Frosted casement, top-hung vent
W44	Kitchen / dining	In	4'-2.5"	3'-0"	7'-0"	Serving hatch over a granite counter, glazed sliding shutters (close while cooking)
W17	Pooja	E	2'-9.5"	5'-6"	7'-0"	High vent to the poomukham, jali + mesh (lamp smoke out)
W31	Upper master bedroom (1st)	S	6'-0"	3'-0"	7'-0"	Timber jali + glazed shutters
W32	Study (1st)	S	3'-0"	3'-0"	7'-0"	Timber jali + glazed shutters (3 ft, over the desk)
W33	Upper master bath (1st)	S	2'-0"	5'-0"	7'-0"	Frosted casement, top-hung vent
W34	Sitting and study (upper master) (1st)	N	6'-0"	3'-0"	7'-0"	Teak casement, glazed (6 ft, north light for the desk and reading)
W41	Sitting and study (upper master) (1st)	W	2'-0"	5'-0"	7'-0"	High jali vent (west, cross-ventilation)
W40	Stair (1st)	In	9'-6"	1'-0"	8'-0"	Timber jali screen between the stair well and the covered terrace (light and air for the stair)
W42	Upper passage (1st)	N	3'-0"	3'-6"	7'-0"	Teak casement, glazed (3 ft, north light for the reading nook)
GV1-3	Roof	-	-	-	-	Three jali vents in the front gable (mukhappu): air for the roof space over the verandah and the kitchen front

Finishes

Space	Floor	Walls / skirting	Ceiling
Living, dining	Red oxide (IPS) or polished Kota / Tandur stone	4 in flush skirting in floor stone; lime-finish or mineral paint	RCC slab soffit at 9'-5", plastered (the covered terrace above keeps it shaded)
Bedrooms, dressing	Matt vitrified 2x2 ft or red oxide	4 in flush skirting; putty + washable emulsion	Ground floor: RCC slab soffit at 9'-5", plastered; first floor: false ceiling at 9'-6", 50 mm insulation above
Pooja	White marble or teak	Teak panelling behind idol; 4 in marble skirting	Teak / board at 9'-6"
Kitchen	Anti-skid matt vitrified or Kota, mid-tone	Tile / stone full height between counter and wall cabinets	Moisture-resistant board at 9'-6", storage loft above
Master bath, common bath, upper bath	Anti-skid ceramic (R11), falls 1:60 to drain	Tiles to 7 ft; full height in shower; waterproofing 12 in up all walls, 7 ft in shower	Moisture-resistant board / PVC at 8'-6"
Wet area	Rough Cuddapah / Kota stone, falls to drain	4 ft stone or tile dado	Board at 9'-6"
Stair	Granite or Kota treads with a rounded nosing and anti-slip grooves, 10 in treads, 7 in risers	Teak handrail at 3 ft on the open side, timber jali to the living	Open to the roof
Lobby, landing, passage	Red oxide or vitrified	4 in flush skirting; washable paint	Slab soffit / board
Covered terrace (first floor)	Terracotta anti-skid tile on a waterproofed slab, falls 1:80 to a drain	Railing 3'-6" on the open sides (teak cap, MS or teak balusters); bamboo chiks on the south and east	Steel trusses and the tiled roof above, painted; galvanised steel posts at the terrace edge
Poomukham, steps	Flamed / leather-finish granite (not polished)	Granite skirting; plinth face clad 2 ft (splash zone)	Exposed rafters + board
Exterior	Plinth apron: PCC 3 ft wide sloped away	AAC + 20 mm plaster with waterproof additive; elastomeric paint	-
Roof (all)	Mangalore clay tiles, every edge tile clipped / screwed	Membrane + 50 mm insulation on cement-fibre deck	Steel truss on RCC ring beams (first-floor walls for the main roof, ground-floor walls for the front gable)

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 27' x 75' (front 64' used), road on east

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).


Stage	Draft for professional review (duplex option)
Drawing	**Schedules**
Sheet	**A-601**
Scale	-
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 27' x 75' (front 64' used), road on east

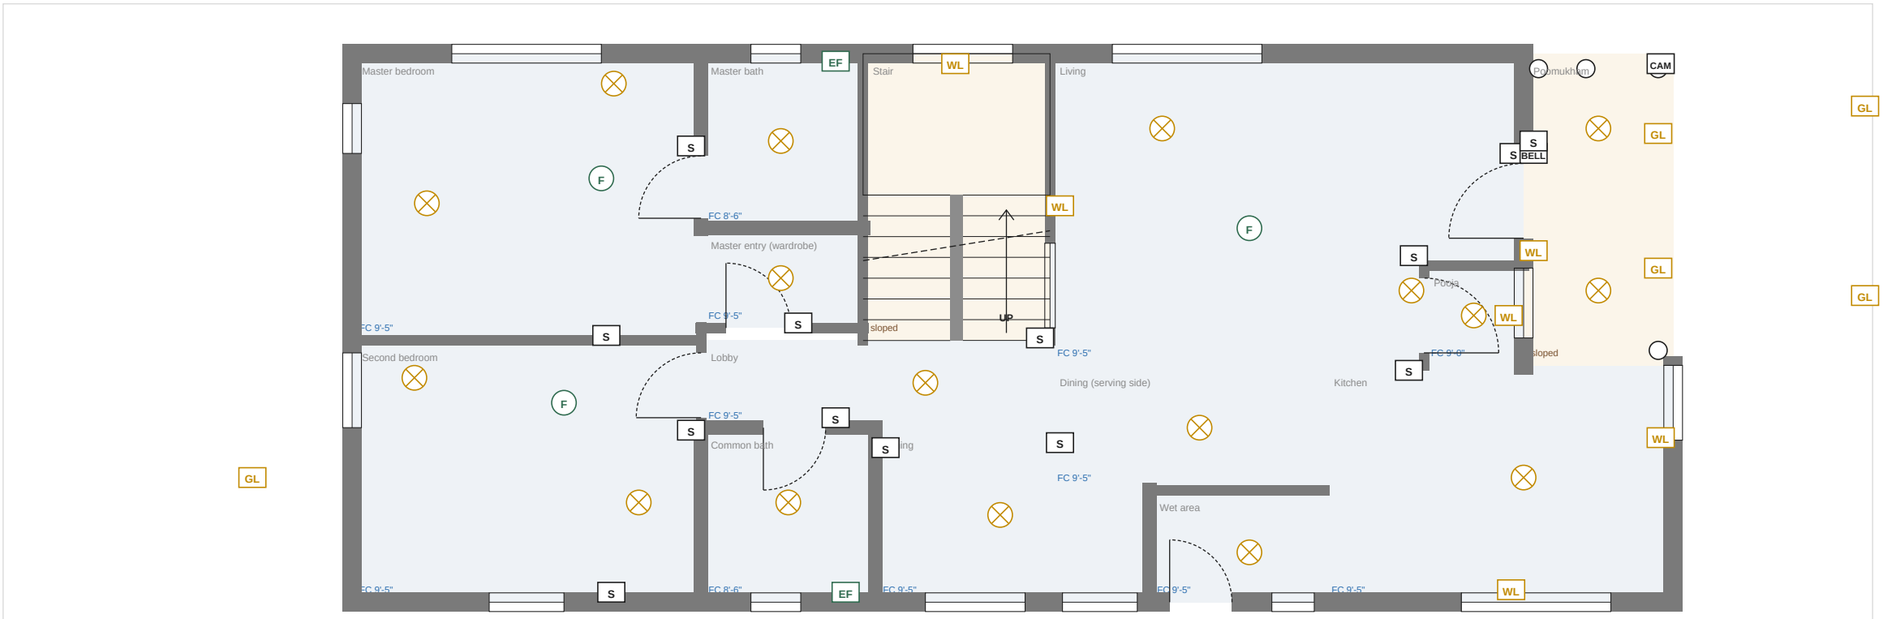

Lighting schedule

Code	Item	Height	No.
L	Ceiling light	ceiling	17
WL	Wall light / mirror light	6'-6"	6
F	Ceiling fan point	ceiling	3
EF	Exhaust fan	7'-0"	2
S	Switchboard	4'-0"	13
BELL	Bell push	4'-6"	1
CAM	CCTV point	8'-0"	1
GL	Outdoor / gate light	7'-0"	5

Lighting and ceiling notes

- Switchboards on the latch side of every door at 4 ft; 2-way switches at both bedroom beds and both ends of the hall.
- Bathroom switches outside the door; geyser switch with indicator lamp outside too.
- Fans at least 7 ft clear of the floor; long downrods in sloped ceilings; fan hooks cast or bolted, never in false ceiling board. Terrace fan and lights are wet-rated, hung from the steel trusses.
- Warm 2700-3000 K light in living and bedrooms, 4000 K in kitchen and offices; no downlights directly over the bed head.
- False ceilings (blue) with 50 mm insulation above; access panel near every light cluster and near AC pipe runs.
- Lights, fans, office sockets and router on the inverter circuit; outdoor lights on a timer or photocell.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).


Stage	Draft for professional review (duplex option)
Drawing	**Lighting, fans and ceilings, ground floor**
Sheet	**E-101**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground


Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)

Guntur, Andhra Pradesh

Plot 27' x 75' (front 64' used), road on east



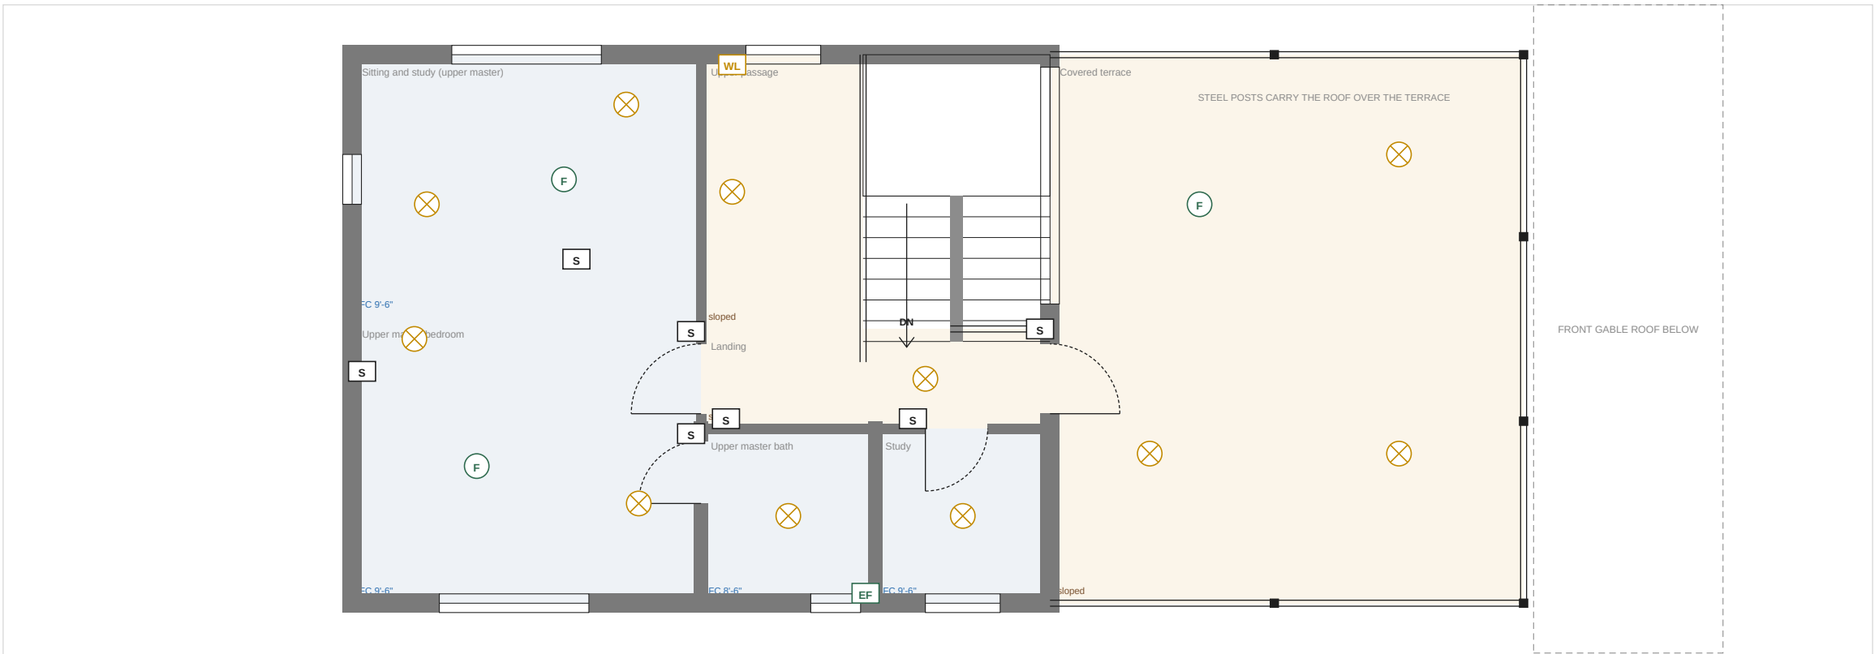

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Lighting schedule

Code	Item	Height	No.
L	Ceiling light	ceiling	11
WL	Wall light / mirror light	6'-6"	1
F	Ceiling fan point	ceiling	3
EF	Exhaust fan	7'-0"	1
S	Switchboard	4'-0"	7


Lighting and ceiling notes

- Switchboards on the latch side of every door at 4 ft; 2-way switches at both bedroom beds and both ends of the hall.
- Bathroom switches outside the door; geyser switch with indicator lamp outside too.
- Fans at least 7 ft clear of the floor; long downrods in sloped ceilings; fan hooks cast or bolted, never in false ceiling board. Terrace fan and lights are wet-rated, hung from the steel trusses.
- Warm 2700-3000 K light in living and bedrooms, 4000 K in kitchen and offices; no downlights directly over the bed head.
- False ceilings (blue) with 50 mm insulation above; access panel near every light cluster and near AC pipe runs.
- Lights, fans, office sockets and router on the inverter circuit; outdoor lights on a timer or photocell.

Stage	Draft for professional review (duplex option)
Drawing	**Lighting, fans and ceilings, first floor**
Sheet	**E-102**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 64' used), road on east

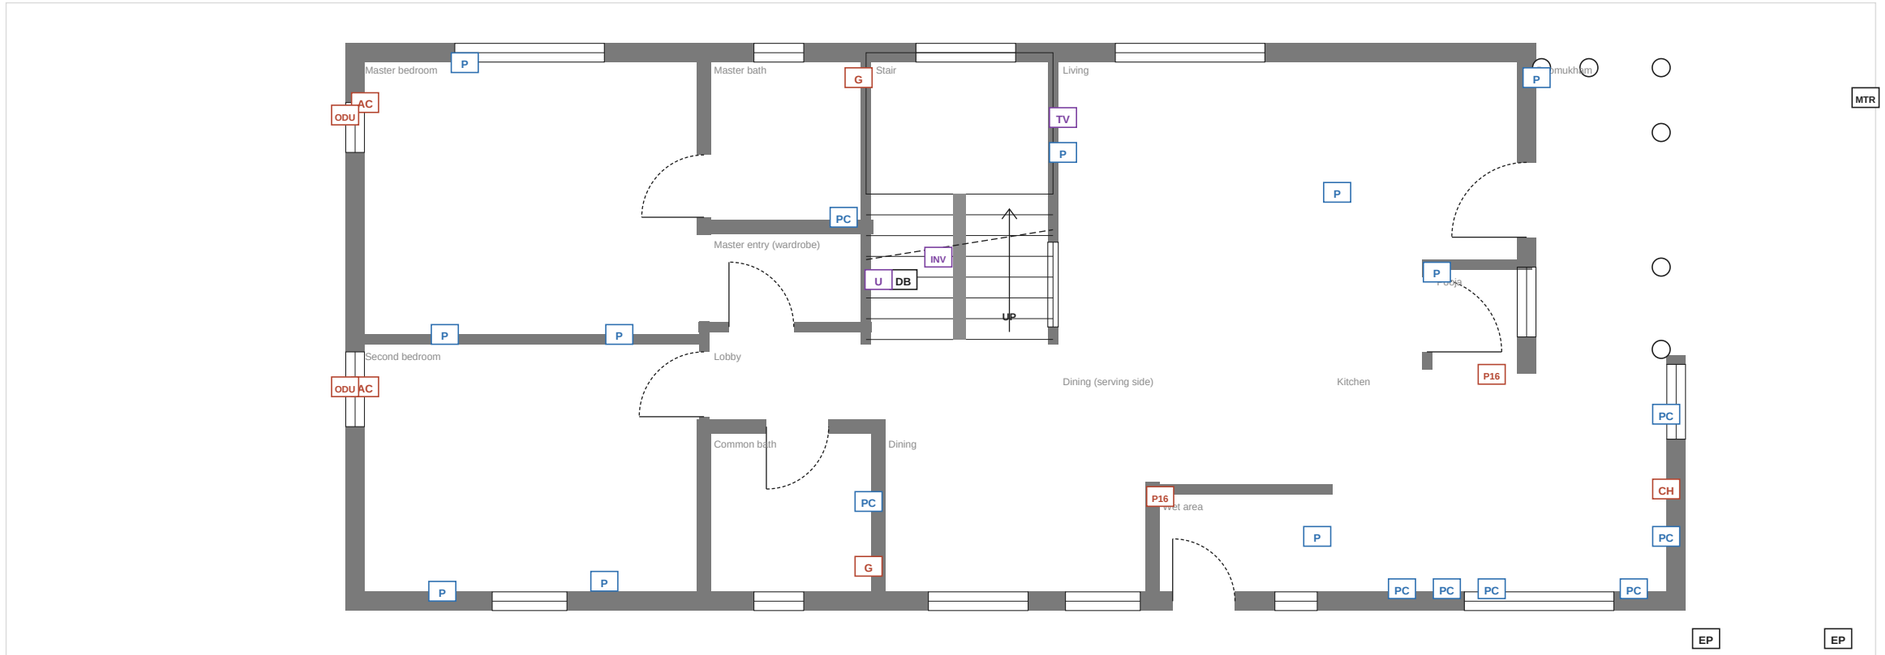

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Power schedule

Code	Item	Height	No.
CH	Kitchen chimney point (16 A)	7'-0"	1
P	6 A socket	1'-0"	10
PC	6 A socket at counter	3'-6"	8
P16	16 A power socket	varies	2
U	Inverter (UPS) socket	1'-0"	1
TV	TV + data point	3'-6"	1
AC	AC indoor unit (16 A socket, sleeve, drain)	7'-6"	2
ODU	AC outdoor unit bracket	7'-0" outside	2
G	Geyser (16 A)	6'-6"	2
DB	Distribution board	5'-0" to top	1
INV	Inverter + battery	floor	1
MTR	Meter at gate	5'-0"	1
EP	Earth pit	ground	2

Power notes


- Separate MCB circuit for each AC, geyser, kitchen power, washing machine and pump; RCCB 30 mA on all socket circuits.
- AC: 16 A socket at 7'-6", 65 mm sleeve sloping out, drain pipe to a gully (not onto the wall); ODUs on shaded north / west walls on brackets.
- AC indoor units never above the bed head or desk chair: cold draught on the head is the common complaint.
- Study (first floor) and the upper master desk: UPS socket + data + 1 normal socket at desk height; Cat6 from the router to the TV and both desks; Wi-Fi access point on the landing for the first floor.
- Kitchen: 5-6 counter sockets at 42 in, 16 A for the fridge, chimney and microwave / OTG; none within 2 ft of the sink.
- DB in the under-stair cupboard off the lobby (central, dry) with 25% spare ways and a sub-board for the first floor; meter at the gate; 2 earth pits; surge protector.
- Empty 25 mm conduits from the roof (solar PV), gate (CCTV, bell, intercom) and sump (pump controller) to the DB.

Stage	Draft for professional review (duplex option)
Drawing	**Power, AC and data, ground floor**
Sheet	**E-103**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 64' used), road on east

N

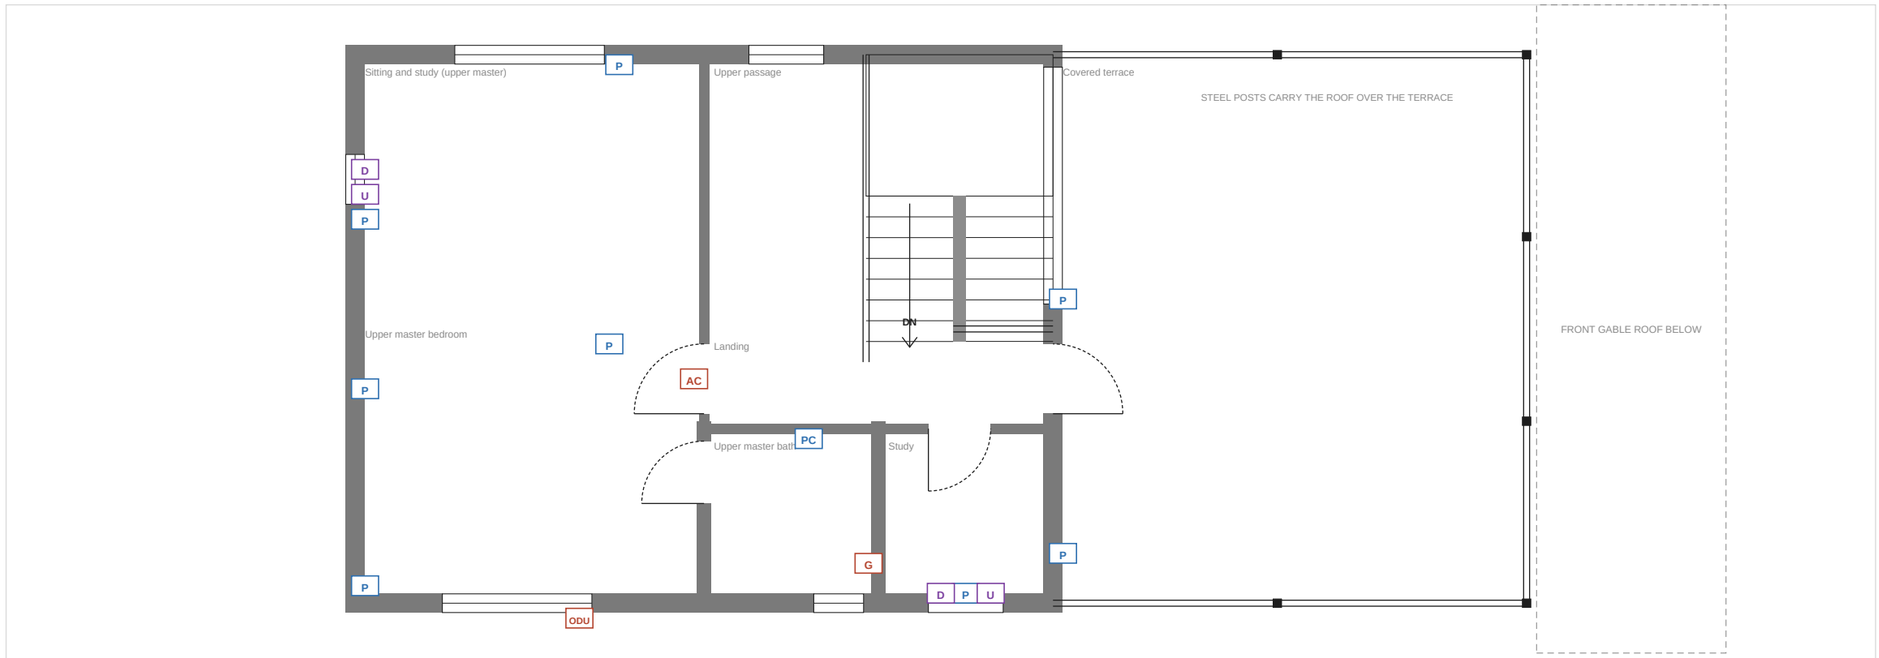

Power schedule

Code	Item	Height	No.
P	6 A socket	1'-0"	8
PC	6 A socket at counter	3'-6"	1
U	Inverter (UPS) socket	1'-0"	2
D	Data point (Cat6)	1'-0"	2
AC	AC indoor unit (16 A socket, sleeve, drain)	7'-6"	1
ODU	AC outdoor unit bracket	7'-0" outside	1
G	Geyser (16 A)	6'-6"	1

Power notes


- Separate MCB circuit for each AC, geyser, kitchen power, washing machine and pump; RCCB 30 mA on all socket circuits.
- AC: 16 A socket at 7'-6", 65 mm sleeve sloping out, drain pipe to a gully (not onto the wall); ODUs on shaded north / west walls on brackets.
- AC indoor units never above the bed head or desk chair: cold draught on the head is the common complaint.
- Study (first floor) and the upper master desk: UPS socket + data + 1 normal socket at desk height; Cat6 from the router to the TV and both desks; Wi-Fi access point on the landing for the first floor.
- Kitchen: 5-6 counter sockets at 42 in, 16 A for the fridge, chimney and microwave / OTG; none within 2 ft of the sink.
- DB in the under-stair cupboard off the lobby (central, dry) with 25% spare ways and a sub-board for the first floor; meter at the gate; 2 earth pits; surge protector.
- Empty 25 mm conduits from the roof (solar PV), gate (CCTV, bell, intercom) and sump (pump controller) to the DB.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Power, AC and data, first floor**
Sheet	**E-104**
Scale	1:75 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground

Kerala Home, Phase 1

Kerala-style two-storey residence (duplex option)
Guntur, Andhra Pradesh
Plot 27' x 75' (front 64' used), road on east

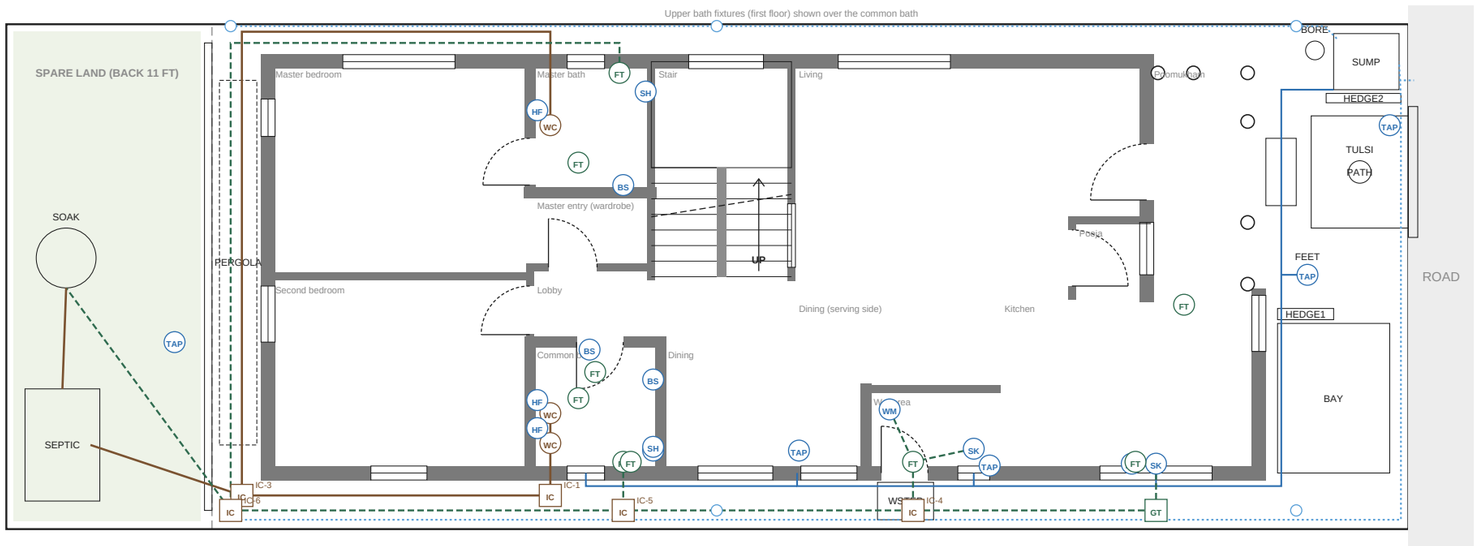

Water supply (CPVC): sump pump to the loft tank, then down
Soil line (uPVC 110 mm) to septic tank
Grey water (uPVC 75 mm) to the soak pit
Rainwater to sump filter, overflow to road

Fixtures and points

Code	Item	No.
WC	Wall-hung WC, concealed cistern	3
HF	Health faucet	3
BS	Wash basin	3
SH	Shower mixer (hot + cold)	3
FT	Floor trap / linear drain	9
SK	Sink	2
WM	Washing-machine inlet + drain	1
RO	RO purifier point	1
TAP	Tap	5
IC	Inspection chamber	5
GT	Grease trap	1

Plumbing notes

- Sump pump fills a 1,000 L loft tank over the upper bath; pressure pump for the showers; isolation valve for each bathroom and the kitchen, outside the room.
- Supply pipes run in wall chases or behind one service panel (no exposed pipes on the facades), never under the floor slab.
- Soil and grey water kept separate; inspection chamber at every bend and junction; 1:40 falls on 110 mm, 1:30 on 75 mm.
- Grease trap before the kitchen line joins anything; vent pipe from each WC stack above the eaves.
- Septic tank (sealed) and a lined soak pit in the spare rear land, behind the baths and about 15 ft from the house, far from the sump; if that land is ever sold, move them or switch to a bio-digester with treated outflow.
- Upper WC stack runs down inside the 7 in wet wall between the common bath and the store, with a vent pipe above the main roof eaves.
- Rain from both gutters to the sump through a first-flush filter; overflow to the road drain.
- Test the bore / supply water: RO for drinking, softener for bathrooms if hardness is high; matt or PVD fittings.

Pre-construction draft for review by the architect, structural engineer, MEP and Vastu consultant. Not for construction or approval until checked and signed. Verify all dimensions and levels on site. Prepared with AI assistance (Claude).

Stage	Draft for professional review (duplex option)
Drawing	**Water supply and drainage**
Sheet	**P-101**
Scale	1:100 at A3
Revision	C-duplex (option study)
Date	1 Nov 2026
Units	Feet-inches; levels from finished ground